

SEALANT Cat. No. MDBOOT-SEAL

Sealant should be used with T&B MOTOR-DISCONNECT Boots: MDBOOT-0, MDBOOT-1, MDBOOT-2 and MDBOOT-3.


The cable should be clean and free of grease, oil, and other foreign substances.

Apply two layers around each cable at the same distance from the connector.

Slide the assembly into boot, apply TY-RAP® cable ties and work sealant around wires at end of boot to eliminate voids.

MATERIAL SPECIFICATIONS:

DESCRIPTION:	Polybutene Compound
APPLICATION TEMPERATURE:	40°F to 100°F
SERVICE TEMPERATURE:	-40°F to 180°F
DIMENSIONS:	Width 1" Thickness 1/8" Length (Std. Roll) 10' wrapped on release liner
ENVIRONMENTAL RESISTANCE:	Resists normal aging process
CHEMICAL RESISTANCE:	Resists acids, bases and alcohols
DIELECTRIC STRENGTH:	200 v/mil minimum
VOLUME RESISTIVITY:	10 ¹³ ohms/cm
FLAME RETARDANCY:	Pass VO Vertical Flame Test

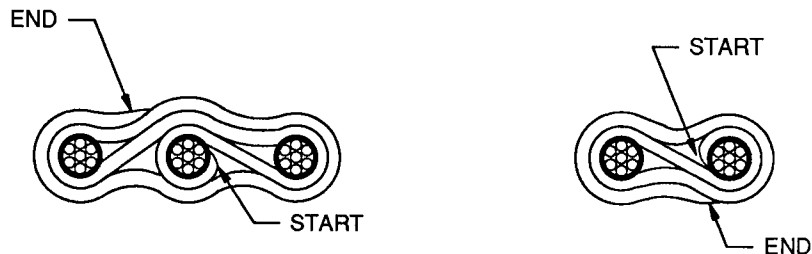

WARRANTY: Thomas & Betts sells this product with the understanding that the user will perform all necessary tests to determine the suitability of this product for his intended use. Thomas & Betts manufactures its goods and tools in a manner to be free of defects. Should any defect occur in its goods (within two years) or tools (within ninety days), Thomas & Betts, upon prompt notification, will at its option, exchange or repair the goods or tools or refund the purchase price.

Limitations and Exclusions: THIS WARRANTY IS IN LIEU OF ALL OTHER REPRESENTATIONS AND EXPRESSED AND IMPLIED WARRANTIES (INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR USE) AND UNDER NO CIRCUMSTANCES SHALL THOMAS & BETTS BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL PROPERTY DAMAGES OR LOSSES.

Thomas & Betts Corporation
1001 Frontier Road Bridgewater, New Jersey 08807
Printed in U.S.A.

Made in U.S.A.

TA00899 D