


Electrical metallic tubing (EMT) fittings

Combination compression couplings

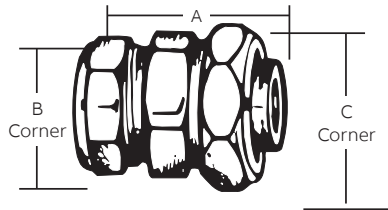


Features and benefits:

- Raintight

Combination compression couplings – Heavywall to Liquidtight flexible metal conduit – steel – zinc plated

Cat. No.	Conduit Size (in.)	Dimensions (in.)			Std. Ctn.
		A	B	C	
LTH 111	½ rigid to ½ liquidtight	1⅞	1⅞	1⅞	100

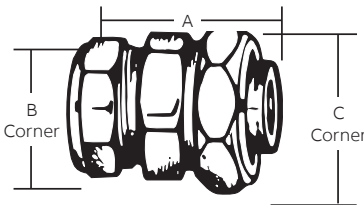

Features and benefits:

- Raintight


Combination compression couplings – Thinwall to Liquidtight flexible metal conduit – steel – zinc plated

Cat. No.	Conduit Size (in.)	Dimensions (in.)			Std. Ctn.
		A	B	C	
LTT 111	½ EMT to ½ liquidtight	1¾	1⅝	1⅞	100
LTT-112	¾ EMT to ¾ liquidtight	1¾	1⅞	1⅞	50
LTT-113	1 EMT to 1 liquidtight	1⅝	1½	1¾	25

EMT LOK conduit connector

Features and benefits:

- Simple, one-piece installation with no locknuts
- Available in insulated or non-insulated throat
- Screw designed for exceptional pullout resistance
- Captive screw ensures that the screw is intact for installation and resists backing out after installation
- Corrosion-resistant, zinc-chromatic plating
- Positive grounding
- Vibration-resistant screw design
- UL Listed and CSA certified



EMT LOK conduit connector – steel




Cat. No.	Description	Std. Ctn.
TC101-SC	½" Uninsulated	500
TC-102-SC	¾" Uninsulated	250
TC-701-SC	½" Insulated	500
TC-702-SC	¾" Insulated	250

UL Listing No. E16592, CSA Listing No. LR-12798.

Installation using either slotted or Phillips screwdriver head, 35-in.-lb. of torque onto the EMT.

Note: Excessive torque could damage EMT or housing.

Compression connectors, couplings & capped corner couplings



Features and benefits:

- ½"-4" Concrete tight

Compression connectors – die-cast zinc

Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
Non-insulated				
TC-211-SC	1/2	1 1/4	1	500
TC-212-SC	3/4	1 11/32	1 5/32	250
TC-213-SC	1	1 29/64	1 15/32	200
TC-214-SC	1 1/4	1 13/16	1 27/32	100
TC-215-SC	1 1/2	1 7/8	2 1/16	40
TC-216-SC	2	2 5/32	2 17/32	20
TC-217-SC	2 1/2	2 45/64	3 1/4	12
TC-218-SC	3	2 7/8	3 15/16	12
TC-219-SC	3 1/2	2 47/64	4 7/16	10
TC-2110-SC	4	2 13/16	4 15/16	6

UL File No. E-16592 – ½"-4".

CSA File No. LR-12798 – ½"-2".

Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
Insulated				
TC-811-SC	1/2	1 ²³ /64	6 ³ /64	500
TC-812-SC	3/4	1 ¹⁵ /32	1 ⁵ /16	250
TC-813-SC	1	1 ³⁵ /64	1 ¹⁵ /32	200
TC-814-SC	1 1/4	1 ²⁹ /32	1 ²⁷ /32	100
TC-815-SC	1 1/2	1 ³¹ /32	2 ¹ /16	40
TC-816-SC	2	2 ¹ /4	2 ¹⁷ /32	20
TC-817-SC	2 1/2	2 ²⁵ /32	3 ¹ /4	12
TC-818-SC	3	2 ³¹ /32	3 ¹⁵ /16	12
TC-819-SC	3 1/2	2 ²⁷ /32	4 ⁷ /16	10
TC-8110-SC	4	2 ²⁹ /32	4 ¹⁵ /16	6

