

Service Entrance Cable Fittings

Two-taper design — one slow and one fast — enables connectors to accept varied cable sizes for maximum take-up!

Watertight Connectors for Oval Cable



- Tapered neoprene bushings resist oil, sunlight and water
- Hex gland and body take same wrench opening
- Stainless-steel slip ring prevents cable from twisting as gland ring is tightened
- Threads on body tapered for water-sealing

CAT. NO.	HUB SIZE	OVAL CABLE RANGE	
		MAX.	MIN.
2111	1/2"	.420 x .560	.380 x .520
2232	3/4"	.385 x .600	.260 x .500
2233	3/4"	.500 x .750	.375 x .625
2234	3/4"	.555 x .800	.490 x .675
2432	1"	.385 x .600	.260 x .500
2433	1"	.500 x .750	.375 x .625
2434	1"	.555 x .800	.430 x .675
2438	1"	.565 x .855	.440 x .730
2439	1"	.635 x .975	.510 x .850
2442	1 1/4"	.635 x .975	.510 x .850
2443	1 1/4"	.640 x 1.050	.490 x .900
2446	1 1/4"	.750 x 1.150	.565 x .965
2454	1 1/2"	.840 x 1.275	.655 x 1.090
2447	1 1/2"	.880 x 1.425	.695 x 1.240
2448	2"	.968 x 1.500	.790 x 1.390
2449	2"	1.062 x 1.765	.850 x 1.550
2450	2"	1.820 x 1.190	1.700 x 1.050

UL File No. E-15170

CSA File No. 589


Note: These may be obsolete and replaced.

Hand tightens — no tools required!

Nylon UF-Cable Fittings for Corrosive Environments



- Tapered threaded hub
- Liquidtight and dust tight
- Corrosion- and weather-resistant nylon construction for both outdoor and indoor applications

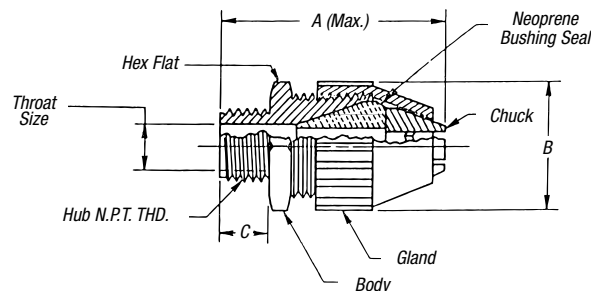

CAT. NO.	HUB SIZE	UF CABLE RANGE		A	B	C
		MAX.	MIN.	MAX.	±.060	±.060
2827	1/2"	.550 x .280	.400 x .190	2.60	1.270	.600
2828	3/4"	.675 x .280	.525 x .190	3.00	1.570	.620
2829	3/4"	.775 x .280	.625 x .190	3.00	1.570	.620

UL File No. 15170

CSA File No. 589