

Electrical Testers

Non-Contact Voltage Testers (NCVT-1/NCVT-2)

- Non-contact detection of standard voltage (48-1000V AC) in cables, cords, circuit breakers, lighting fixtures, switches, outlets, and wires.
- High intensity, bright green LED indicates the tester is operational and aids in illuminating the workspace.
- Microprocessor controlled low-battery indicator.
- Digitally controlled ON/OFF power button.
- Auto Power-Off feature conserves and extends battery life.
- Lightweight, durable polycarbonate plastic resin construction with a convenient pocket-clip.
- 9.8 ft. (3 m) drop protection.
- CAT IV 1000V safety rating provides expanded operation and protection.
- Does NOT detect DC voltage.



NCVT-1



Additional Features for Dual Range NCVT-2

- Automatically detects and indicates low voltage (12 - 48 Volts AC) and standard voltage (48 - 1000 Volts AC), allowing broad applications.
- Non-contact detection of low-voltage in security, entertainment, communications, environmental control, and irrigation systems.

Voltage Range	12 - 48 VOLTS AC (Low) NCVT-2 only	50 - 1000 VOLTS AC (Standard)
Audible	low-pitched pulsing beeping sound	high-pitched continuous beeping sound
Visual	blue LED turns off and red LED blinks (approximately 2x per second).	green LED turns off and red LED illuminates continuously.



NCVT-2




Cat. No.	Voltage Range	Frequency Range	Pollution Degree	Batteries	Overall Length	Width	Height	Weight	Weight w/ Batteries
NCVT-1	50-1000 volts AC	50-500 Hz	2	2 x AAA	5.50" (140 mm)	0.72" (18 mm)	1.0" (25 mm)	0.8 oz. (23 g)	1.6 oz. (46 g)
NCVT-2	12-1000 volts AC	50-500 Hz	2	2 x AAA	5.50" (140 mm)	0.72" (18 mm)	1.0" (25 mm)	0.8 oz. (23 g)	1.6 oz. (46 g)

Non-Contact Voltage Tester with Flashlight (NCVT-3)

- Non-contact detection of voltage (12 - 1000V AC) in cables, cords, circuit breakers, light fixtures, switches, outlets and wires as well as voltage in security, entertainment, communications, environmental control and irrigation systems.
- The visual indicator of the presence of voltage is an LED bar graph – the higher the voltage sensed, or the closer to the voltage source, the more LEDs light up.
- Bright flashlight illuminates work area and may be used independent of NCVT.
- Auto Power-Off feature conserves and extends battery life.
- Lightweight, compact tool with pocket clip provides easy storage and quick access.
- IP67: Dustproof and waterproof.
- 6.6 ft. (2 m) drop protection.
- CAT IV 1000V safety rating.
- Does NOT detect DC voltage.



NCVT-3

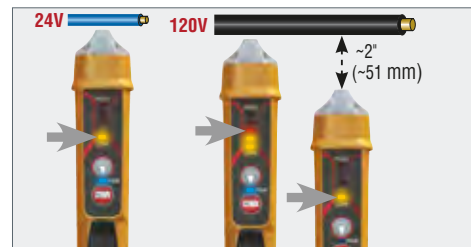

Cat. No.	Voltage Range	Frequency Range	Pollution Degree	Batteries	Overall Length	Width	Height	Weight	Weight w/ Batteries
NCVT-3	12-1000 Volts AC	50-500 Hz	2	2 x AAA	5.83" (148 mm)	0.72" (18 mm)	.96" (24 mm)	1.16 oz. (29 g)	2.5 oz. (72 g)

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 296 for additional information on warnings.