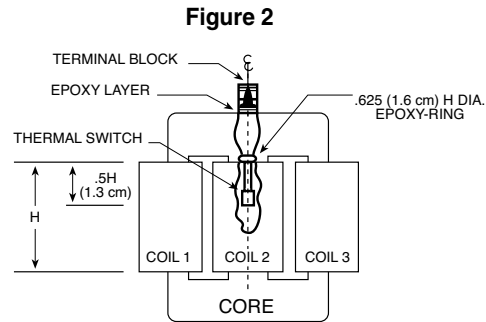





kVA	Mounting Position	Illustration
27.0-118.0	Bottom of the case	Figure 1
145-750	Top flange of the core bracket	Figure 2

For Information on the following, please contact the factory

1. Transformers rated primary 230 volts delta, secondary 460Y/266 volts.
2. Low temperature rise units using class 220°C insulation with either 115°C or 80°C rise operating temperature.
3. Totally enclosed non-ventilated units.



AC LINE REACTORS

Protect your sensitive equipment from harmful line disturbances with Acme AC Line Reactors. AC Line Reactors help prevent equipment failure and downtime, and can add years to the life of your equipment.

Designed to protect DC motor drives, AC variable frequency drives and the motors they power. AC Line Reactors allow Acme to augment the Drive Isolation Transformer package to offer both line and load power quality protection for a wide range of applications.

Our product line features flexible design and ease of installation for use in a variety of applications such as paper machines, process lines, press controls and drive systems, along with tube mills and other sophisticated process equipment. These applications are found in such industries as food and beverage, paper, packaging systems and printing.

Features

- Gapped iron core inductor—designed for optimum performance while providing harmonics compensation.
- Precision wound copper coils—maximum protection from short-circuiting.
- Finger-safe terminal blocks (up to 60 HP).
- Compact design—allows for more flexible installation.
- Amperage ratings of 2 to 600 amps
- Available in 3% and 5% impedance
- Can be used with 208, 240, 480 and 600 volts.
- Covered under Acme's 10-year limited warranty.
- UR and cUR Recognized.
- CE Marked (up to 55 amps)

Benefits

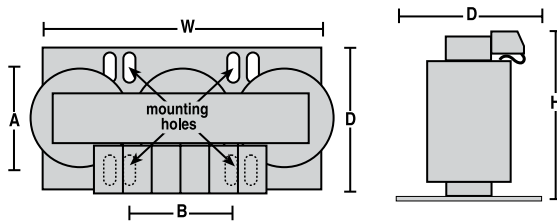
Protect your motors and motor drives from a variety of power conditioning problems while realizing the following benefits:

- Protection from damaging voltage drop.
- Elimination of nuisance tripping of drives or circuit breakers.
- Reduction of motor current surges and power line spike currents.
- Improvement in true power factor of capacitor input drives.
- Cooler, quieter operation.
- Reduction of harmonic distortion.
- Longer life for motors and solid state components.

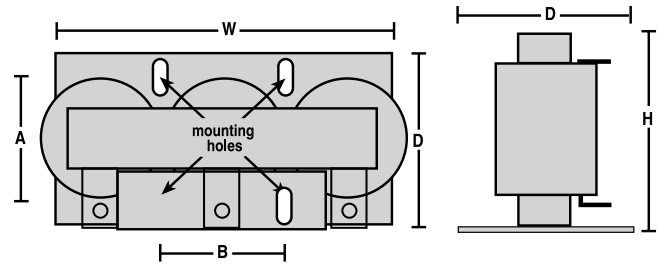


**AC Line Reactors Dimensional Drawings**

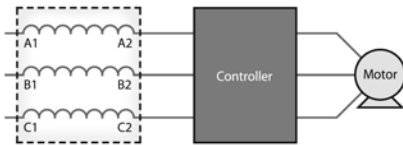
1-60 HP; 2-80 Amp



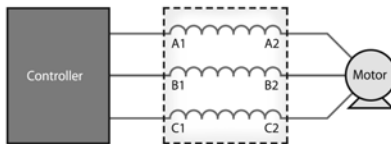
75-500 HP; 110-600 Amp

**APPLYING AC LINE REACTORS**

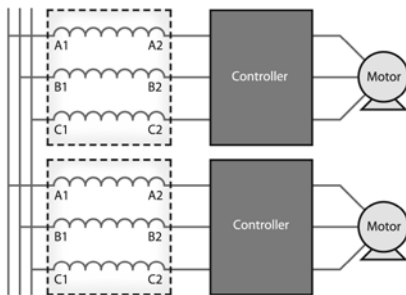
Acme's three-phase AC Line Reactors can be used as an input filter for adjustable speed DC drives and as input or output filters for AC pulse width modulated variable frequency drives. They are bi-directional protective filtering devices and can be applied in a variety of configurations.

**Input to Inverter/Drive**

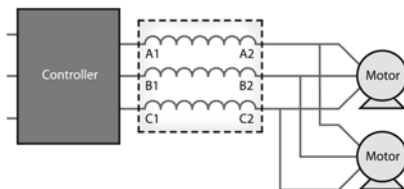
AC Line Reactors protect your sensitive equipment from noise generated by the drive or inverter. They protect the controller from power surges, spikes and harmonic distortion.

**Output of Inverter/Drive (AC Drive only)**

Motors run cooler and quieter with an AC Line Reactor placed between the inverter and motor. This application also reduces dv/dt and protects the controller from short circuits and surges.

**Multiple Controllers on a Single Power Line**

Each drive or inverter on a single power line requires its own AC Line Reactor in order to provide adequate surge protection, prevent crosstalk and reduce har-

**Multiple Motors Controlled by a Single Drive (AC Drive only)**

Multiple motors controlled by a single drive require only one AC Line Reactor between the controller and motors.

**480 VOLTS, 3% Z, 60 Hz (600 VOLTS, 2.4% Z; 240 VOLTS, 6% Z)**

Catalog Number	Motor*		Reactor Amp	uH	Dimensions			Mounting Dimensions		Weight (Lbs.)(Kg.)
	H.P.	Amp			Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	A (Depth)	B (Width)	
ALRB002TBC ①	1	2.1	2	11027	3.875 (9.8)	4.25 (10.8)	3.125 (7.90)	2.00 (5.1)	1.44 (3.7)	3 (1.4)
ALRB003TBC ①	1.5	3	3	7351	3.875 (9.8)	4.25 (10.8)	3.125 (7.90)	2.00 (5.1)	1.44 (3.7)	3 (1.4)
ALRB004TBC ①	2	3.4	4	5513	3.875 (9.8)	4.25 (10.8)	3.125 (7.90)	2.00 (5.1)	1.44 (3.7)	3 (1.4)
ALRB006TBC ①	3	4.8	6	3676	3.875 (9.8)	4.25 (10.8)	3.125 (7.90)	2.00 (5.1)	1.44 (3.7)	3 (1.4)
ALRB008TBC ①	5	7.6	8	2757	4.75 (12.1)	6.50 (16.5)	3.75 (9.50)	2.10 (5.3)	2.00 (5.1)	5 (2.3)
ALRB012TBC ①	7.5	11	12	1838	4.75 (12.1)	6.50 (16.5)	3.75 (9.50)	2.10 (5.3)	2.00 (5.1)	6 (2.7)
ALRB016TBC ①	10	14	16	1378	4.75 (12.1)	6.50 (16.5)	3.75 (9.50)	2.30 (5.8)	2.00 (5.1)	6 (2.7)
ALRB025TBC ①	15	21	25	882	4.75 (12.1)	6.50 (16.5)	4.00 (10.2)	2.60 (6.6)	2.50 (6.4)	9 (4.1)
ALRB027TBC ①	20	27	27	817	4.75 (12.1)	6.50 (16.5)	4.00 (10.2)	2.60 (6.6)	2.50 (6.4)	9 (4.1)
ALRB035TBC ①	25	34	35	630	4.75 (12.1)	6.50 (16.5)	4.50 (11.4)	3.20 (8.1)	2.50 (6.4)	13 (5.9)
ALRB045TBC ①	30	40	45	490	4.75 (12.1)	6.50 (16.5)	4.50 (11.4)	3.20 (8.1)	3.00 (7.6)	14 (6.4)
ALRB055TBC ①	40	52	55	401	7.00 (17.8)	9.00 (22.9)	4.50 (11.4)	3.50 (8.9)	3.60 (9.1)	22 (10.0)
ALRB080TBC	60	77	80	276	7.00 (17.8)	9.00 (22.9)	4.75 (12.1)	3.60 (9.1)	3.60 (9.1)	23 (10.4)
ALRB110CBC	75	96	110	200	7.00 (17.8)	9.00 (22.9)	5.50 (14.0)	3.60 (9.1)	3.60 (9.1)	27 (12.2)
ALRB130CBC	100	124	130	170	7.00 (17.8)	9.00 (22.9)	6.50 (16.5)	3.50 (8.9)	3.60 (9.1)	34 (15.4)
ALRB160CBC	125	156	160	138	7.00 (17.8)	9.00 (22.9)	6.50 (16.5)	4.20 (10.7)	3.60 (9.1)	36 (16.3)
ALRB200CBC	150	180	200	110	7.00 (17.8)	9.00 (22.9)	8.00 (20.3)	4.20 (10.7)	3.60 (9.1)	55 (24.9)
ALRB250CBC	200	240	250	88	8.50 (21.6)	10.80 (27.4)	8.00 (20.3)	5.70 (14.5)	4.60 (11.7)	74 (33.6)
ALRB300CBC	250	302	300	74	8.50 (21.6)	10.80 (27.4)	8.00 (20.3)	5.20 (13.2)	4.60 (11.7)	85 (38.6)
ALRB360CBC	300	361	360	61	8.50 (21.6)	10.80 (27.4)	8.00 (20.3)	6.20 (15.2)	4.60 (11.7)	105 (47.6)
ALRB420CBC	350	414	420	53	8.50 (21.6)	10.80 (27.4)	8.50 (21.6)	6.20 (15.2)	4.60 (11.7)	113 (51.3)
ALRB480CBC	400	477	480	46	8.50 (21.6)	10.80 (27.4)	8.50 (21.6)	6.70 (17.0)	4.60 (11.7)	119 (54.0)

* Motor HP and Amp rated at 480 volts.

① CE Marked

