


SIDE


115 °C RISE

SINGLE PHASE .250-2 KVA

TOTALLY ENCLOSED
ENCAPSULATED DISTRIBUTION TRANSFORMERS
FRONT ACCESS AND BUCK-BOOST & 50 HZ.

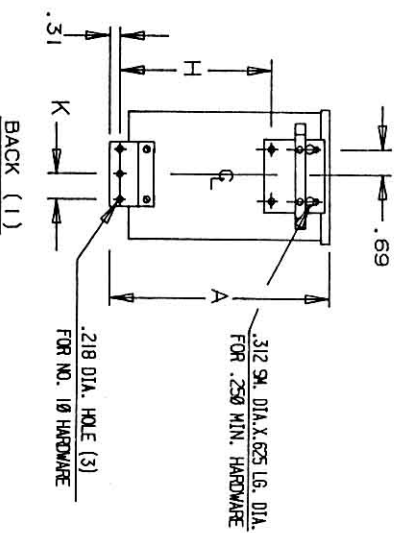

BACK (1)

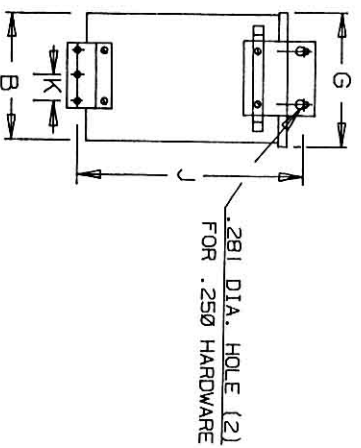


BACK (2)

NOTES:

1. TRANSFORMER SLIPS ONTO MOUNTING BRACKET (BACK(1)) BACK SLIP-ON WALL MOUNTING.
2. TRANSFORMER BOLTS ONTO MOUNTING BRACKET (BACK(2)). BACK RIGID WALL MOUNTING.
3. METHOD OF INSERTION OF BRACKET DETERMINES THE TYPE OF MOUNTING; SAME BRACKET FOR BOTH TYPES.
4. DOUBLE KNOCKOUTS:
 - 1.13 DIA. FOR .75 CONDUIT
 - .88 DIA. FOR .50 CONDUIT
5. FRONT ACCESS NOT AVAILABLE ON BUCK - BOOST.

DIMENSIONS											
KVA	A	B	C	D	E	F	G	H	J	K	WT. LBS.
.250	8.20	3.90	3.88	1.30	3.67	7.36	4.08	4.70	8.68	.94	10.0
.500	8.58	4.28	4.20	1.48	3.98	7.74	4.37	5.09	9.06	.94	15.0
.750	9.20	4.66	4.51	1.67	4.30	8.36	4.75	5.71	9.68	.94	19.0
1.000	10.02	5.40	5.13	1.67	4.92	9.18	5.50	6.53	10.50	1.50	24.0
1.500	11.14	5.40	5.13	1.67	4.92	10.30	5.50	7.65	11.62	1.50	30.0
2.000	12.52	5.40	5.13	1.67	4.92	11.68	5.50	9.03	13.00	1.50	38.0



BOTTOM

OUTLINE

Acme Electric Corp.
LUMBERTON, N.C.

TYPE NO.	DRAWN		SJ HUNT		1/11/90		DATE
DESIGN	CHK. SJH		APP. JLH				
MATERIAL							
FINISH							
SCALE NONE		SHEET		1		OF	
UNLESS OTHERWISE SPECIFIED							

CADD DWG. 70007001