


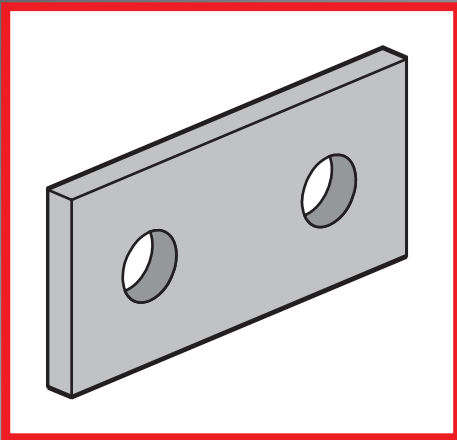

FITTINGS

Power-Strut has a wide variety of fittings to meet all of your application requirements

MATERIAL:

All Power-Strut fittings are formed in punch press dies from mild, pickled and oiled, bar or strip steel. Plain or electro-galvanized fittings meet the requirements for ASTM A575 and A-576, or ASTM A-36.

STANDARD DIMENSIONS:

Standard dimensions on all fittings are as follows except where otherwise indicated:

Fitting Thickness: $\frac{1}{4}$ "
 Fitting Width: $1\frac{5}{8}$ "
 Hole Diameter: $\frac{9}{16}$ "
 Hole Spacing: $1\frac{7}{8}$ " on centers and $1\frac{3}{16}$ " from ends.

STANDARD FINISH:

All Power-Strut fittings are available in painted green or electro-galvanized finish.

ORDERING INFORMATION:


When ordering, add the length or size and finish to the part number. See pages 8-9 for finish abbreviations and an example.

SET SCREW TORQUE:

BOLT SIZE	$\frac{1}{4}$ "-20	$\frac{5}{16}$ "-18	$\frac{3}{8}$ "-16	$\frac{1}{2}$ "-13	$\frac{5}{8}$ "-11	$\frac{3}{4}$ "-10
Set Screw Torque In/Lbs	40	60	125	250	400	665


Note: Caution should be taken not to overtighten the set screw

PS 2421 – 45° Degree Stair Tread Support



Weight/100 pcs: 220 lbs.

PS 855 – Angular "I" Beam Clamp

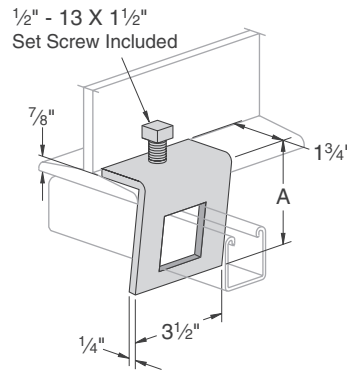


Part No.	Use With	A	Load Rating	Wt./100 pcs.
PS 855-1	PS 200, PS 210	3 1/2"	500	107
PS 855-2	PS 500			98

Use in pairs only



Fittings

PS 2657 – Double U Beam Clamp



Specify 6" or 12" max. flange width (Example: PS 2657 T1-6")

T1 Use with:

PS 200, PS 210, PS 300, PS 400, PS 500, PS 520

T2 Use with:

PS 100, PS 150, PS 200 2T3


T3 Use with:

PS 150 2T3, PS 100 2T3

Part No.	"A" Beam Flange Width
PS 2657 T1-6	4" - 6"
PS 2657 T1-9	6" - 9"
PS 2657 T1-12	9" - 12"
PS 2657 T1-15	12" - 15"
PS 2657 T1-18	15" - 18"
PS 2657 T2-6	4" - 6"
PS 2657 T2-9	6" - 9"
PS 2657 T2-12	9" - 12"
PS 2657 T2-15	12" - 15"
PS 2657 T2-18	15" - 18"
PS 2657 T3-6	4" - 6"
PS 2657 T3-9	6" - 9"
PS 2657 T3-12	9" - 12"
PS 2657 T3-15	12" - 15"
PS 2657 T3-18	15" - 18"

Weight/100 pcs: 280 lbs.

PS 2656 – U Bolt Beam Clamp With Hook



Specify 6" or 12" max. flange width (Example: PS 2656 T1-6")

T1 Use with:

PS 200, PS 210, PS 300, PS 400, PS 500, PS 520

T2 Use with:

PS 100, PS 150, PS 200 2T3


T3 Use with:

PS 150 2T3, PS 100 2T3

Part No.	"A" Beam Flange Width
PS 2656 T1-6	4" - 6"
PS 2656 T1-9	6" - 9"
PS 2656 T1-12	9" - 12"
PS 2656 T1-15	12" - 15"
PS 2656 T1-18	15" - 18"
PS 2656 T2-6	4" - 6"
PS 2656 T2-9	6" - 9"
PS 2656 T2-12	9" - 12"
PS 2656 T2-15	12" - 15"
PS 2656 T2-18	15" - 18"
PS 2656 T3-6	4" - 6"
PS 2656 T3-9	6" - 9"
PS 2656 T3-12	9" - 12"
PS 2656 T3-15	12" - 15"
PS 2656 T3-18	15" - 18"

Weight/100 pcs: 143 lbs.

PS 685 – Beam Clamp

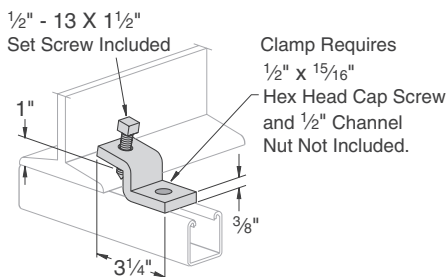


Stock Thickness: 3/8"

Load Rating: 450 lbs.

Use in pairs only

Weight/100 pcs: 63 lbs.

PS 2651 – Beam Clamp



Part No.	Use With	A	Load Rating	Wt./100 pcs.
PS 2651 T1	PS 200, PS 210 PS 300, PS 400 PS 500, PS 520	3 3/8"	1,000	83
PS 2651 T2	PS 100, PS 150 PS 200 2T3	5"		92
PS 2651 T3	PS 150 2T3 PS 100 2T3	8 1/4"		112

Use in pairs only