

EXGJH and EXLK Flexible Couplings

Explosionproof, Dust-Ignitionproof

UNILETS™ for Use with Threaded Rigid Metal Conduit and IMC.

NEC/CEC — 1/2" and 3/4" Sizes:
Class I, Groups A, B, C, D
Class II, Groups E, F, G
Class III

NEC/CEC — 1" Size:
Class I, Groups C, D
Class II, Groups E, F, G
Class III

NEC/CEC — 1-1/4" thru 4" Sizes:
Class I, Group D
Class II, Groups E, F, G
Class III

ATEX: — stainless steel 1/2" thru 2" Sizes:
Ex d IIC Gb
Ex t IIIC Db
IP66

Applications

- Used in areas where vibration and/or movement is a problem. Also used in place of rigid conduit in difficult-bend situations.

Features

- Explosionproof, dust-ignitionproof, watertight
- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Heavy duty design resists mechanical abuse.
- Electrical conductivity equal to rigid conduit on a similar length basis—no bonding jumper required.
- Interior insulating liner protects conductors from abrasion under vibrating conditions.
- EXGJH: both end fittings are female, each furnished with a removable male nipple.
- EXLK: female end fitting with union at one end and a female end fitting with a removable male nipple at the other end.

Standard Materials

- 1/2" thru 2": outer bronze braid, inner brass core with insulating liner
- 2-1/2" thru 4": outer stainless steel braid, inner stainless steel core with insulating liner
- End Fittings: 1/2" thru 2"—brass; 2-1/2" thru 4"—stainless steel
- Unions: 1/2" thru 1" zinc plated steel; 1-1/4" thru 2" ductile iron
- Close nipples: zinc plated steel

Standard Finishes

- Natural finish

Options

- 1/2" through 2" available in stainless steel. Add suffix **-SS**.
- EXLK Union is zinc plated steel. Stainless steel union available in 1/2" through 1". Add suffix **-SU**.
- Close nipples are zinc plated steel. For 1/2" through 1-1/2" stainless steel nipple. Add suffix **-NS**
- Custom lengths available—consult factory

NEC/CEC Certifications and Compliances

- UL Standard: 886 (1203)
- UL Listed: E34997
- CSA Standard: C22.2 No. 25, C22.2 No. 30
- CSA Certified: 065181

ATEX Certifications and Compliances

- Certification Type FLEXCO (*Excludes Nipples and Unions*)
 - Gas, Zones 1 and 2:
 - Conforming to ATEX 94/9/EC: Ex II 2G
 - Type of Protection: Ex d IIC Gb
 - Dusts, Zones 21 and 22:
 - Conforming to ATEX: Ex II 2D
 - Type of Protection: Ex t IIIC Db
- Ambient Temperatures: -40 °C ≤ to ≤ + 150 °C (-40 °F ≤ to ≤ + 302 °F)
- Ex Standards: EN 60079-0, 60079-1, EN 60079-31
- ATEX Certificate: LCIE 11 ATEX 3006U
- Index of Protection according EN/IEC 60529: IP66



EXGJH

Suitable for Wet Locations – Two Removal Male Nipples



EXLK

One Removal Male Nipple, One Removable Union



EXGJH and EXLK Flexible Couplings

Explosionproof, Dust-Ignitionproof

UNILETS™ for Use with Threaded Rigid Metal Conduit and IMC.

NEC/CEC — 1/2" and 3/4" Sizes:
Class I, Groups A, B, C, D
Class II, Groups E, F, G
Class III

NEC/CEC — 1" Size:
Class I, Groups C, D
Class II, Groups E, F, G
Class III

NEC/CEC — 1-1/4" thru 4" Sizes:
Class I, Group D
Class II, Groups E, F, G
Class III

ATEX — stainless steel 1/2" thru
2" Sizes:
Ex d IIC Gb
Ex t IIIC Db
IP66

HAZARDOUS LOCATION FITTINGS: NEC/CEC EXPLOSIONPROOF CONDUIT FITTINGS

APPLETON

Size (Inches)		Catalog Number	
Flex Length	Diameter Size	EXGJH	EXLK
4	1/2	EXGJH-14 ◇	EXLK-14 ◇
4	3/4	EXGJH-24 ◇	EXLK-24 ◇
6	1/2	EXGJH-16 ◇	EXLK-16 ◇
6	3/4	EXGJH-26 ◇	EXLK-26 ◇
6	1	EXGJH-36	EXLK-36
8	1/2	EXGJH-18 ◇	EXLK-18 ◇
8	3/4	EXGJH-28 ◇	EXLK-28 ◇
8	1	EXGJH-38	EXLK-38
10	1/2	EXGJH-110 ◇	EXLK-110 ◇
10	3/4	EXGJH-210 ◇	EXLK-210 ◇
10	1	EXGJH-310	EXLK-310
12	1/2	EXGJH-112 ◇	EXLK-112 ◇
12	3/4	EXGJH-212 ◇	EXLK-212 ◇
12	1	EXGJH-312	EXLK-312
12	1-1/4	EXGJH-412	EXLK-412
12	1-1/2	EXGJH-512	EXLK-512
12	2	EXGJH-612	EXLK-612
12	2-1/2	EXGJH-712	
12	3	EXGJH-812	
12	4	EXGJH-1012	
15	1/2	EXGJH-115 ◇	EXLK-115 ◇
15	3/4	EXGJH-215 ◇	EXLK-215 ◇
15	1	EXGJH-315	EXLK-315
15	1-1/4	EXGJH-415	EXLK-415
15	1-1/2	EXGJH-515	EXLK-515
15	2	EXGJH-615	EXLK-615
15	2-1/2	EXGJH-715	
15	3	EXGJH-815	
15	4	EXGJH-1015	
18	1/2	EXGJH-118 ◇	EXLK-118 ◇
18	3/4	EXGJH-218 ◇	EXLK-218 ◇
18	1	EXGJH-318	EXLK-318
18	1-1/4	EXGJH-418	EXLK-418
18	1-1/2	EXGJH-518	EXLK-518
18	2	EXGJH-618	EXLK-618
18	2-1/2	EXGJH-718	
18	3	EXGJH-818	
18	4	EXGJH-1018	
21	1/2	EXGJH-121 ◇	EXLK-121 ◇
21	3/4	EXGJH-221 ◇	EXLK-221 ◇
21	1	EXGJH-321	EXLK-321
21	1-1/4	EXGJH-421	EXLK-421
21	1-1/2	EXGJH-521	EXLK-521
21	2	EXGJH-621	EXLK-621
21	2-1/2	EXGJH-721	
21	3	EXGJH-821	
21	4	EXGJH-1021	

Size (Inches)		Catalog Number	
Flex Length	Diameter Size	EXGJH	EXLK
24	1/2	EXGJH-124 ◇	EXLK-124 ◇
24	3/4	EXGJH-224 ◇	EXLK-224 ◇
24	1	EXGJH-324	EXLK-324
24	1-1/4	EXGJH-424	EXLK-424
24	1-1/2	EXGJH-524	EXLK-524
24	2	EXGJH-624	EXLK-624
24	2-1/2	EXGJH-724	—
24	3	EXGJH-824	—
24	4	EXGJH-1024	—
27	1/2	EXGJH-127 ◇	EXLK-127 ◇
27	3/4	EXGJH-227 ◇	EXLK-227 ◇
27	1	EXGJH-327	EXLK-327
27	1-1/4	EXGJH-427	EXLK-427
27	1-1/2	EXGJH-527	EXLK-527
27	2	EXGJH-627	EXLK-627
27	2-1/2	EXGJH-727	
27	3	EXGJH-827	
27	4	EXGJH-1027	
30	1/2	EXGJH-130 ◇	EXLK-130 ◇
30	3/4	EXGJH-230 ◇	EXLK-230 ◇
30	1	EXGJH-330	EXLK-330
30	1-1/4	EXGJH-430	EXLK-430
30	1-1/2	EXGJH-530	EXLK-530
30	2	EXGJH-630	EXLK-630
30	2-1/2	EXGJH-730	
30	3	EXGJH-830	
30	4	EXGJH-1030	
33	1/2	EXGJH-133 ◇	EXLK-133 ◇
33	3/4	EXGJH-233 ◇	EXLK-233 ◇
33	1	EXGJH-333	EXLK-333
33	1-1/4	EXGJH-433	EXLK-433
33	1-1/2	EXGJH-533	EXLK-533
33	2	EXGJH-633	EXLK-633
33	2-1/2	EXGJH-733	
33	3	EXGJH-833	
33	4	EXGJH-1033	
36	1/2	EXGJH-136 ◇	EXLK-136 ◇
36	3/4	EXGJH-236 ◇	EXLK-236 ◇
36	1	EXGJH-336	EXLK-336
36	1-1/4	EXGJH-436	EXLK-436
36	1-1/2	EXGJH-536	EXLK-536
36	2	EXGJH-636	EXLK-636
36	2-1/2	EXGJH-736	
36	3	EXGJH-836	
36	4	EXGJH-1036	

◇ Indicates items in the shaded area which are UL Listed for Class I, Groups A, B, C, D; Class II, Groups E, F, G; Class III.

EXGJH and EXLK Flexible Couplings

Explosionproof, Dust-Ignitionproof, Watertight

UNILETS™ for Use with Threaded Rigid Metal Conduit and IMC.

NEC/CEC — 1/2" and 3/4" Sizes:
Class I, Groups A, B, C, D
Class II, Groups E, F, G
Class III


NEC/CEC — 1" Size:
Class I, Groups C, D
Class II, Groups E, F, G
Class III

NEC/CEC — 1-1/4" thru 4" Sizes:
Class I, Group D
Class II, Groups E, F, G
Class III

ATEX: — stainless steel 1/2" thru
2" Sizes:
Ex d IIC Gb
Ex t IIIC Db
IP66

EXGJH and EXLK Dimensions in Millimeters (Inches)

Coupling Size	A	B	C	D	E	Bending Radius ①
1/2	80.7 (3.18)	38.1 (1.50)	76.2 (3.00)	35.7 (1.41)	37.3 (1.47)	254.0 (10.00)
3/4	81.0 (3.19)	38.9 (1.53)	82.6 (3.25)	44.5 (1.75)	44.5 (1.75)	304.8 (12.00)
1	91.9 (3.62)	46.7 (1.84)	92.1 (3.63)	52.4 (2.06)	50.8 (2.00)	355.6 (14.00)
1-1/4	98.0 (3.86)	51.6 (2.03)	111.1 (4.38)	66.7 (2.63)	71.4 (2.81)	406.4 (16.00)
1-1/2	108.5 (4.27)	55.6 (2.19)	115.9 (4.56)	79.4 (3.13)	77.8 (3.06)	406.4 (16.00)
2	114.3 (4.50)	62.0 (2.44)	125.4 (4.94)	98.4 (3.88)	94.5 (3.72)	457.2 (18.00)
2-1/2	133.4 (5.25)	65.0 (2.56)	158.8 (6.25)	114.3 (4.50)	123.8 (4.88)	381.0 (15.00)
3	136.1 (5.36)	66.8 (2.63)	158.8 (6.25)	127.8 (5.03)	136.5 (5.38)	584.2 (23.00)
4	140.7 (5.54)	66.8 (2.63)	161.9 (6.38)	168.3 (6.63)	163.5 (6.44)	1219.2 (48.00)

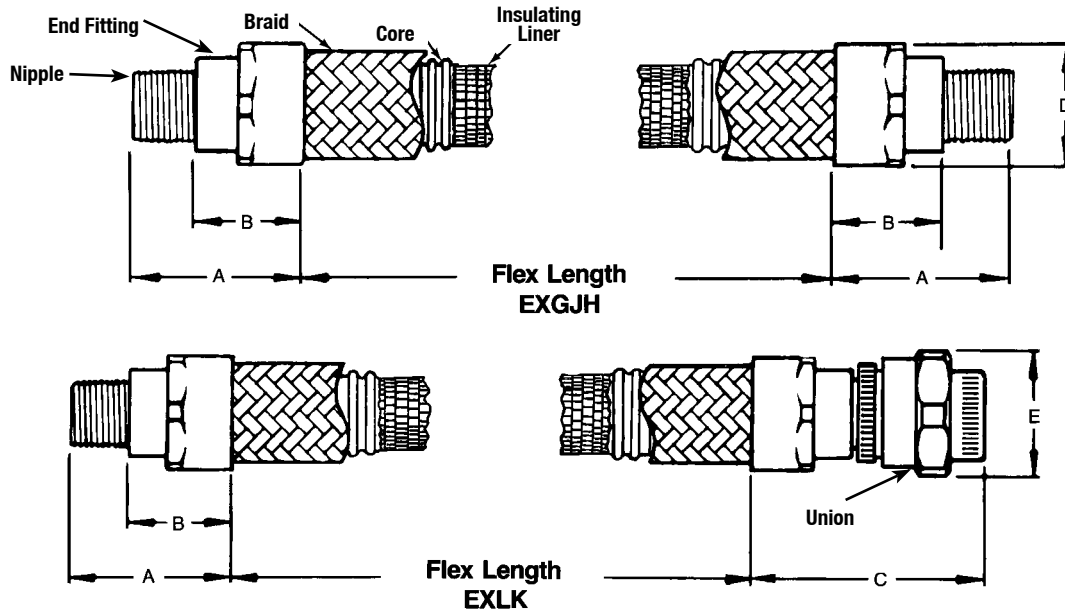

① Bending Radius shown is minimum recommended.