

JB Conduit Outlet Boxes, Covers and Hangers


UNILET® for use with Threaded Rigid Metal Conduit and IMC.

Fittings


FITTINGS: CONDUIT OUTLET BODIES

		Hub Size (Inches)	Depth in Inches/ Millimeters (A)	Catalog Number	
Description				Malleable Iron	Aluminum
Cast Covers — Furnished with screws — When used with gasket provides raintight fit, supports 250 lbs./113.4 kgs.					
	Hub Covers	1/2	0.75/20.0	JBK-50	JBK-50-A
		3/4	0.94/23.9	JBK-75	JBK-75-A
	Cover	Blank	0.19/4.8	JBK-B	JBK-1B-CA
Gasket — Neoprene					
		—	—	JB-GK-N	JB-GK-N
Flexible Fixture Hangers — Furnished with gasket and screws					
	Ball Type — 15° swing in all directions, support 250 lbs./113.4 kg.	1/2	2.56/65.0	JBK-50-BS	—
		3/4	2.56/65.0	JBK-75-BS	—
	Cushion type, enclosed and gasketed — 8° swing in all directions. Cushions 40 lbs./18.1 kgs., supports 250 lbs./113.4 kgs.	1/2	1.63/41.4	JBK-50-CS	—
		3/4	1.63/41.4	JBK-75-CS	—

Dimensions

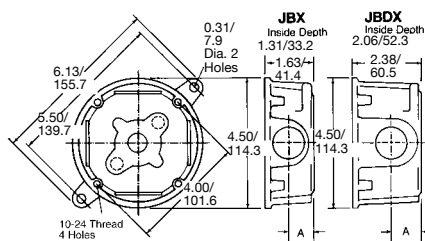

JBX, JBDX

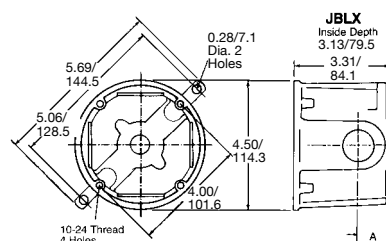

JBLX

Hub Size (Inches)	Dimension "A" in Inches/Millimeters		
	JBX	JBDX	JBLX
1/2	0.75/19.1	0.75/19.1	0.75/19.1
3/4	0.88/22.4	0.88/22.4	0.88/22.4
1	0.81/20.6	1.06/26.9	1.06/26.9

Wiring Capacity

Hub Size (Inches)	JBX	(in³/dm³) *	
		JBDX	JBLX
1/2	15.50/0.25	23.00/0.38	33.00/0.54
3/4	15.50/0.25	23.00/0.38	33.00/0.54
1	15.50/0.25	23.00/0.38	33.00/0.54

* JB covers add no additional cubic inch capacity.