

Quick Wire Access Panel

20 Gauge Housing



Miro-4 ≥ 95% Reflectance



ORDERING INFORMATION

CATALOG #	# OF LAMPS	LAMP WATTS	VOLTS	BALLAST TYPE	OPTICS	LAMPS INCLUDED
IFH4454UEP5	4	54	Unv.	T5HO	Miro-4	F54T5HO/841
IFH4432UEI8	4	32	Unv.	T8	Miro-4	F32T8/841
IFH4654UEP5	6	54	Unv.	T5HO	Miro-4	F54T5HO/841
IFH4632UEI8	6	32	Unv.	T8	Miro-4	F32T8/841

OPTIONS

SUFFIX #	DESCRIPTION	SUFFIX #	DESCRIPTION
3C*	3' Cord (No Plug)	83	835 Lamps
F	Inline Fusing	85	850 Lamps
N	No Lamps	M	Motion Sensor**
EB	Emergency Back-Up	G	Wireguard

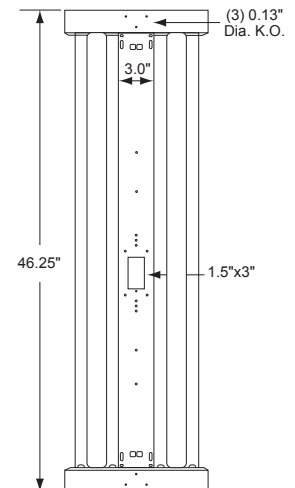


*Also Available in 6', 10', 15' and 20' lengths

**T5 or PS Ballast Required

ACCESSORIES

CATALOG #	DESCRIPTION
CH36	Chain Set
CH36HFC	Chain Set w/Hammer-On Flange Clip
CA36	Cable Set
MS360	360° Motion Sensor

DIMENSIONS AND SPECIFICATIONS

Overall Height: 3.25" (8.26 cm)**Overall Width:** 4 Lamp - 13" (33.02 cm)
6 Lamp - 19.25" (48.90 cm)**Length:** 46.25" (117.48 cm)

AMBIENT TEMPERATURES

PART #	DESCRIPTION	12" CHAIN MOUNT
IFH4454UEP5	4 Lamp, 54w T5HO	122°F/50°C
IFH4432UEI8	4 Lamp, 32w T8	131°F/55°C
IFH4654UEP5	6 Lamp, 54w T5HO	122°F/50°C
IFH4632UEI8	6 Lamp, 32w T8	131°F/55°C

