



Power Flood Pro

PFL126LED 126 Watt LED Power Flood



SPECIFICATIONS:

	PFL126LED3K	PFL126LED
Lumens:	12,270	14,340
Watts:	121.30	120.11
Lumens/Watt:	101.15	119.39
CRI:	70.8	69.7
CCT:	3104	4703
LC Prod. ID:	P5GL6MJM	PUQ6YWA7

Construction:

Designed for commercial and industrial applications, providing cooler operating temperatures, brighter light and longer LED life. Apertures for field or factory installed photocontrol. Available with heavy duty trunion or slipfitter.

Optics:

Atlas Power Flood Pro fixtures utilize individual lenses for maximum light intensity. These lenses are made of optical grade acrylic. This guarantees more footcandles, less glare and less wasted light.

Thermal Management:

Atlas Power Flood Pro fixtures are designed as a complete system to optimize LED life and light output. The Patent Pending thermal stacking heat removal technology extracts heat from within the housing moving it away from LEDs and components. The lower temperatures result in long LED life (200,000+ hrs) and component life and also allows for higher light output.

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations

²The PFL126LED qualifies for DesignLights Consortium Premium, the PFL126LED3K is DesignLights Consortium qualified. Both are eligible for rebates from DLC member utilities.

AC Input:

120/208/240/277 V

Driver:

Constant current, Class 2, 120-277 VAC, 50-60 Hz

High Efficiency – min. 88%

Off-State Power: 0 Watts

0-10 V Dimming

LEDs:

3000K | 4500K CCT

Epoxy Guard™ protective conformal coated boards

Atlas LEDs provide higher lumen output, greater energy efficiency and more reliable fixture performance. They are tested and binned at 700mA which is the actual operating current used in Atlas LED luminaires, giving a better representation of actual performance.

Reduced Glare:

Positioning of the LED modules within the housing result in light directed to desired locations and reduces offensive light.

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Warranty: Five-year limited warranty

Options:

Photo Control – For factory installed 120V button photo control add suffix PC to part number.

480 Volt – For 480V add suffix 4 to part number.

Project Information

Job Name

Fixture Type 126 Watt LED Power Flood

Catalog Number PFL126LED

Approved by

Alpha Series LED
PROFESSIONAL GRADE



PFL126LED Design
is Protected by
US Patent D740,997




**Optional Factory
Installed Slipfitter
PFL126LED5**

DIMENSIONS:

Weight: (with Trunion) 20 lbs.
(with Slipfitter) 21 lbs.

EPA: 1.00

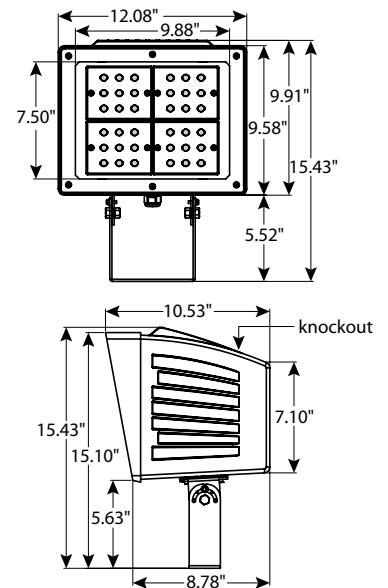

¹LED Life Span Based Upon LM-80 Test Results

**Rebates and Incentives are available in many areas.
Contact an Atlas Representative for more information.**


ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216

800-849-8485 | FAX: 336-227-0110 | www.atlasled.com

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.

PHOTOMETRIC

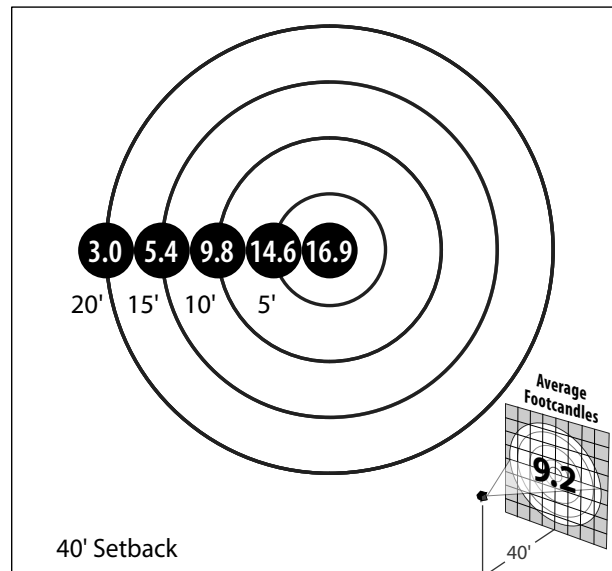

ENERGY SAVINGS

LED		HID			ANNUAL SAVINGS
WATTAGE	ANNUAL COST	SOURCE WATTAGE	TOTAL WATTAGE USED	ANNUAL COST	
126	\$55	200	232	\$128	\$73
126	\$55	250	285	\$150	\$95
126	\$55	400	458	\$226	\$171

MOUNTING DETAIL

