


Fan & Fixture Mounting Boxes



EACH FAN/FIXTURE BOX INCLUDES...

A ready-to-tighten center screw, installed NM cable connector, mud cover, second KO, and two screws for fan/fixture bracket installation (screwed in place until removed by installer).

Ceiling fan/fixture pan boxes.

FEATURES AND BENEFITS

- No loose parts to misplace—totally self-contained!
- Fan/fixture installation screws are parked...ready for easy fan/fixture bracket installation!
- Works well on double joists or wood I-beams
- Combination hex/Phillips head screws for easy installation with power screwdrivers
- UL rated: 70 lb fan, 200 lb fixture; CSA rated: 50 lb fan/fixture
- 2-Hour Fire Rating

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FB405	72185	For 1/2" or 5/8" drywall 6.0 cu. in.	25	25	2.315	.570	4.250
FB4050*	28101	For 1/2" or 5/8" drywall 6.0 cu. in.	100	100	2.315	.570	4.250
FB407	72177	For 5/8" drywall 8.0 cu. in.	25	25	2.405	.660	4.250
FB4070	28102	For 5/8" drywall 8.0 cu. in.	100	100	2.405	.660	4.250

Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked screws provided.

*Bulk packing for lower cost.

Refer to chart on page R-24 for load ratings and number of single conductors.

PATENTED.



Fan & Fixture Mounting Boxes

Boxes accommodate 1/2" or 5/8" drywall with 3/4" furring strips or hat channel.

FEATURES AND BENEFITS

- No loose parts to misplace—totally self-contained!
- For use with 1/2" or 5/8" drywall with 3/4" furring strips or hat channel
- Also for double 5/8" drywall
- Attaches securely to joist through shipped-in-place center screw
- UL rated: 70 lb fan; 200 lb fixture; CSA rated: 50 lb fan/fixture
- 2-Hour Fire Rating



FB412



FB423

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FB412	72189	Pan box/14.4 cu. in.	25	25	3.000	1.250	4.250
FB423	72190	Press-on box/19.5 cu. in.	25	25	3.000	1.250	4.250

Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked screws provided.

Refer to chart on page R-24 for load ratings and number of single conductors.

PATENTED.




EACH FAN/FIXTURE BOX INCLUDES...

A ready-to-tighten center screw, installed NM cable connector, mud cover, second KO, and two screws for fan/fixture bracket installation (screwed in place until removed by installer).



FB412

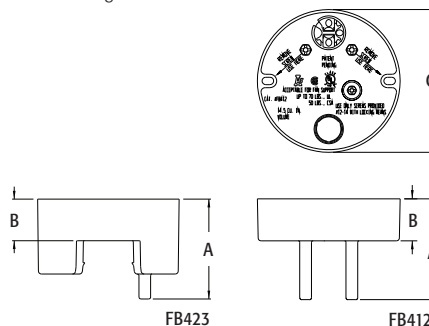

FAN/FIXTURE BOX RATING AND NUMBER OF SINGLE CONDUCTORS

CATALOG NUMBER	CUBIC INCHES	UL FAN LOAD RATING (LBS.)	CSA FAN LOAD RATING (LBS.)	UL FIXTURE STATIC RATING (LBS.)	CSA FIXTURE STATIC RATING (LBS.)	# OF SINGLE CONDUCTORS		
						#14	#12	#10
F426	28.0	-	-	50	50	-	-	-
F426F	28.0	-	-	50	50	-	-	-
FA426	20.7	-	-	50	50	-	-	-
FB405	6.0	70	50	200	50	3	-	-
FB4050	6.0	70	50	200	50	3	-	-
FB407	8.0	70	50	200	50	4	3	3
FB4070	8.0	70	50	200	50	4	3	3
FB412	14.4	70	50	200	50	7	6	5
FB415	10.3	70	50	200	50	5	4	4
FB4150	10.3	70	50	200	50	5	4	4
FB417S	20.0	70	50	70	50	10	8	8
FB417SLP	20.0	70	50	70	50	10	8	8
FB423	19.5	70	50	200	50	9	8	7
FB426	16.0	70	50	200	50	8	7	6
FB426F	16.0	70	50	200	50	8	7	6
F428SC	28.0	-	-	50	-	-	-	-
FB428SC	28.0	70	-	70	-	-	-	-
FB442	13.4	70	50	200	50	6	4	4
FB442F	15.5	70	50*	200	50*	-	-	-
FB442FD	25.0	70	50*	200	50*	-	-	-
FB443	18.3	70	50	200	50	8	7	7
FB443F	18.8	70	50*	200	50*	-	-	-
FB443FD	28.5	70	50*	200	50*	-	-	-
FB444	25.6	70	50	200	50	13	11	10
FB450	14.5	70	50	200	50	7	6	5
FB900	14.5	70	50	200	50	7	6	5
FBA426	21.0	70	50	100	50	-	-	-
FBB450	14.5	70	50	200	50	-	-	-
FBB900	14.5	70	50	200	50	-	-	-
FBC4225BR	21.0	70	70	70	70	-	-	-
FBC4225W	21.0	70	70	70	70	-	-	-
FBC42251BR	21.8	70	-	70	-	-	-	-
FBC42251W	21.8	70	-	70	-	-	-	-
FBC42251GY	21.8	70	-	70	-	-	-	-
FBR415F	18.3	70	50*	90 @ 24" o.c. 150 @ 16" o.c.	50*	-	-	-
FBR423	23.0	70 @ 24" o.c. 70 @ 16" o.c.	50	90 @ 24" o.c. 150 @ 16" o.c.	50	-	-	-
FBR425F	27.3	70	50*	200	50*	-	-	-
FBRS407R	8.0	35	50	50	50	4	3	3
FBRS40712R	8.0	35	50	50	50	4	3	3
FBRS415	15.6	70 @ 24" o.c. 70 @ 16" o.c.	50	90 @ 24" o.c. 150 @ 16" o.c.	50	7	6	6



(continued on next page)