


Press-On Fan & Fixture Mounting Boxes

The fastest, easiest way to mount fans and fixtures. Ships ready-to-install!

FEATURES AND BENEFITS

- No loose parts to misplace, totally self-contained!
- Gripping tangs press-hold to the joist while you reach for your screwdriver
- Comes with NM connector installed and mud cover in place
- Fan/fixture installation screws are parked...ready for easy fan/fixture bracket installation!
- FB426F's flanged design forms a protective barrier against air infiltration
- UL rated: 70 lb fan, 200 lb fixture; CSA rated: 50 lb fan/fixture
- 2-Hour Fire Rating

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FB415	72167	For 1/2" or 5/8" drywall 10.3 cu. in.	25	25	2.250	.500	4.250
FB4150*	72182	For 1/2" or 5/8" drywall 10.3 cu. in.	100	100	2.250	.500	4.250
FB426	72179	For 1/2" or 5/8" drywall 16.0 cu. in.	25	25	2.625	.500	4.250



Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked screws provided.
 *Bulk packing for lower cost.
 Refer to chart on page R-24 for load ratings and number of single conductors.
PATENTED.



FB415




FB426

EACH FAN/FIXTURE BOX INCLUDES...

Press-on box with ready-to-tighten center screw, installed NM cable connector, mud cover, second KO, and two screws for fan/fixture bracket installation (screwed in place until removed by installer).

INSTALLATION INSTRUCTIONS (FB415)

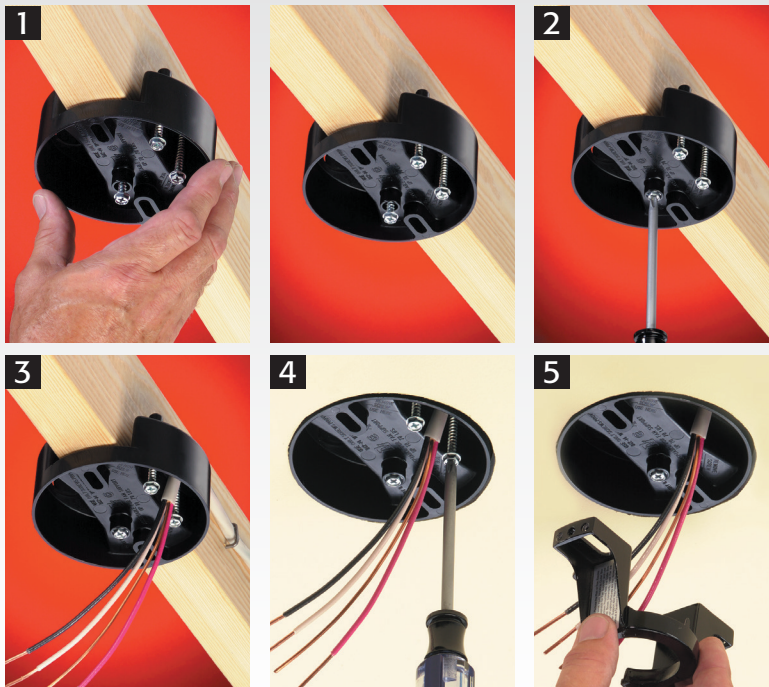

1. Press box onto joist. Gripping tangs, hold the box in place temporarily.
2. Tighten center screw to secure to joist.
3. Push NM cable through connector.
4. Remove two long, "parked" screws for installation of bracket.
5. Use the screws to install fan/fixture bracket through the oval slots in the box, directly into the joist.

FAN/FIXTURE BOX RATING AND NUMBER OF SINGLE CONDUCTORS

CATALOG NUMBER	CUBIC INCHES	UL FAN LOAD RATING (LBS.)	CSA FAN LOAD RATING (LBS.)	UL FIXTURE STATIC RATING (LBS.)	CSA FIXTURE STATIC RATING (LBS.)	# OF SINGLE CONDUCTORS		
						#14	#12	#10
F426	28.0	-	-	50	50	-	-	-
F426F	28.0	-	-	50	50	-	-	-
FA426	20.7	-	-	50	50	-	-	-
FB405	6.0	70	50	200	50	3	-	-
FB4050	6.0	70	50	200	50	3	-	-
FB407	8.0	70	50	200	50	4	3	3
FB4070	8.0	70	50	200	50	4	3	3
FB412	14.4	70	50	200	50	7	6	5
FB415	10.3	70	50	200	50	5	4	4
FB4150	10.3	70	50	200	50	5	4	4
FB417S	20.0	70	50	70	50	10	8	8
FB417SLP	20.0	70	50	70	50	10	8	8
FB423	19.5	70	50	200	50	9	8	7
FB426	16.0	70	50	200	50	8	7	6
FB426F	16.0	70	50	200	50	8	7	6
F428SC	28.0	-	-	50	-	-	-	-
FB428SC	28.0	70	-	70	-	-	-	-
FB442	13.4	70	50	200	50	6	4	4
FB442F	15.5	70	50*	200	50*	-	-	-
FB442FD	25.0	70	50*	200	50*	-	-	-
FB443	18.3	70	50	200	50	8	7	7
FB443F	18.8	70	50*	200	50*	-	-	-
FB443FD	28.5	70	50*	200	50*	-	-	-
FB444	25.6	70	50	200	50	13	11	10
FB450	14.5	70	50	200	50	7	6	5
FB900	14.5	70	50	200	50	7	6	5
FBA426	21.0	70	50	100	50	-	-	-
FBB450	14.5	70	50	200	50	-	-	-
FBB900	14.5	70	50	200	50	-	-	-
FBC4225BR	21.0	70	70	70	70	-	-	-
FBC4225W	21.0	70	70	70	70	-	-	-
FBC42251BR	21.8	70	-	70	-	-	-	-
FBC42251W	21.8	70	-	70	-	-	-	-
FBC42251GY	21.8	70	-	70	-	-	-	-
FBR415F	18.3	70	50*	90 @ 24" o.c. 150 @ 16" o.c.	50*	-	-	-
FBR423	23.0	70 @ 24" o.c. 70 @ 16" o.c.	50	90 @ 24" o.c. 150 @ 16" o.c.	50	-	-	-
FBR425F	27.3	70	50*	200	50*	-	-	-
FBRS407R	8.0	35	50	50	50	4	3	3
FBRS40712R	8.0	35	50	50	50	4	3	3
FBRS415	15.6	70 @ 24" o.c. 70 @ 16" o.c.	50	90 @ 24" o.c. 150 @ 16" o.c.	50	7	6	6



(continued on next page)