

Fan & Fixture Mounting Box with Adjustable Brackets for New Construction

Mounts fans and fixtures on cathedral ceilings between two framing members for perfect centering within room.

FEATURES AND BENEFITS

- Expandable brackets hold box securely between joists—no need to cut and nail 2x4s to center the fan or fixture
- Allows fans/fixtures to be perfectly centered within room
- Large, 8" square mounting surface handles newer fans with larger canopies
- No loose parts to misplace—totally self-contained!
- Installs quickly and securely
- Includes a template to level and position brackets between rafters
- Taller sides fit cathedral ceilings with angles greater than 80°
- Paintable, textured finish
- Fan/fixture installation screws are parked...ready for easy fan/fixture bracket installation!
- UL rated: 70 lb fan/fixture; CSA rated: 50 lb fan/fixture




CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B
FBX900	75224	Adjustable; Fits cathedral ceilings 80° or greater/14.5 cu. in.	1	1	2.300	13.200



For fan/fixture box information, refer to FB900 on page R-16.
Refer to chart on page R-25 for load ratings and number of single conductors.
PATENTED.

FBX900 INCLUDES...

Expandable brackets with mounting screws, screws to adjust box position, mounting block with built-in electrical box, installed NM94 cable connector, and two parked-in-place fan/fixture bracket installation screws (ready for installer).

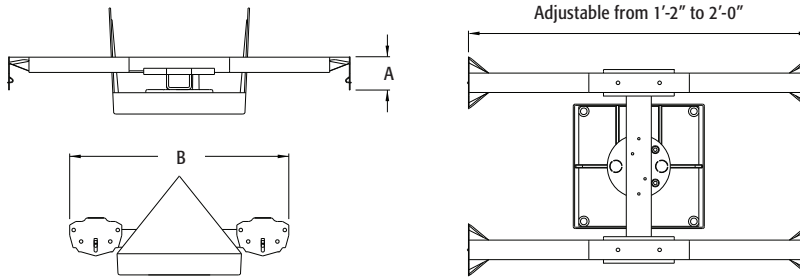


Scan For Video




INSTALLATION INSTRUCTIONS

Remove and use these screws to attach bracket ends to rafters

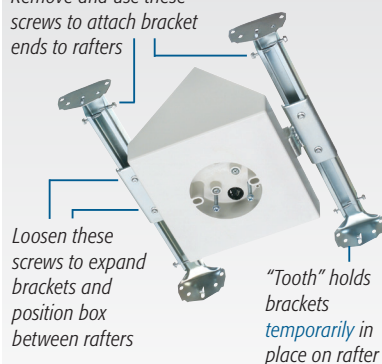


For proper fan/fixture installation, use supplied template to level and position brackets between rafters. Remove captive screws on sides of brackets and use to attach FBX900 assembly to rafters.



Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked screws provided.

Loosen the screws noted in first illustration. Slide box to center it between rafters. Tighten screws. Install wires.



Cut and position drywall to fit around the box. (Note: captive screws in box.) Install fan or fixture per manufacturer's instructions using captive installation screws.

FAN/FIXTURE BOX RATING AND NUMBER OF SINGLE CONDUCTORS

CATALOG NUMBER	CUBIC INCHES	UL	CSA	UL FIXTURE	CSA FIXTURE	# OF SINGLE CONDUCTORS		
		FAN LOAD RATING (LBS.)	FAN LOAD RATING (LBS.)	STATIC RATING (LBS.)	STATIC RATING (LBS.)	#14	#12	#10
FBR54200R	20.0	70 @ 24" o.c. 70 @ 16" o.c.	50	70 @ 24" o.c. 150 @ 16" o.c.	50	-	-	-
FBR5420R	20.0	35	50	50	50	10	8	8
FBR5420SC	20.0	70	50	70	50	10	8	8
FBS1423*	23.0	70	50	70	50	-	-	-
FBS405	6.0	70	50	200	50	4	3	3
FBS405T	6.0	70	50	200	50	4	3	3
FBS407	8.0	70	50	200	50	4	3	3
FBS407T	8.0	70	50	200	50	4	3	3
FBS415	14.6	70	50	200	50	7	6	6
FBS415S	14.6	70	50	70	50	7	6	6
FBS420	20.0	70	50	200	50	10	8	8
FBS420S	20.0	70	50	70	50	10	8	8
FBX900	14.5	70	50	70	50	7	6	5
FN430F	30.5	-	-	50	50	-	-	-
FN440F	39.5	-	-	50	50	-	-	-
FS420SCL	20.0	-	-	50	50	10	8	8
FS427SCL	30.0	-	-	50	50	10	8	8
FSC405R	5.0							
MB8	6.1	70	50	200	50	3	-	-

