

Steel Fan & Fixture Box with Adjustable Mounting Bracket for Existing Construction



FBR4200R INCLUDES...

Box/bracket, screws to adjust box position, installed NM cable connector, multiple KOs, and two screws for fan/fixture bracket installation (screwed in place until removed by installer).

Scan For Video



Heavy-duty, plated steel fan/fixture box with fully adjustable mounting bracket for retrofit installations. Adjusts from 16" to 24" o.c. spacing.


FEATURES AND BENEFITS

- No parts to lose—installation and adjustment screws ship parked in place
- Installs quickly and securely between joists or rafters 16" to 24" o.c.
- Fan/fixture installation screws are parked...ready for easy fan/fixture bracket installation!
- UL rated: 70 lb fan/90 lb fixture at 24" o.c. and 70 lb fan/150 lb fixture at 16" o.c.; CSA rated: 50 lb fan/fixture

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FBR4200R	75315	2" Box depth 20.0 cu. in.	1	10	3.563	3.438	13.979

Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked screws provided.
Refer to chart on page R-25 for load ratings and number of single conductors.

PATENTED.

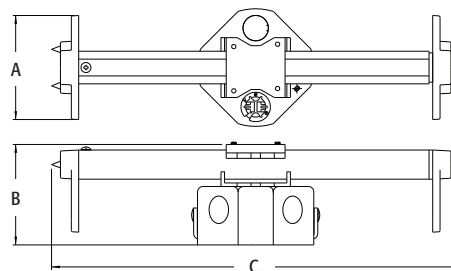


For Joist or Rafters 16" to 24" on center

NEW
Higher Weight
Ratings


INSTALLATION INSTRUCTIONS



1 Cut a 4-1/16" diameter hole in ceiling. Remove box from sled and fit mounting bracket into hole. Position bracket between joists, with bracket resting on the ceiling.



2 Tighten the hex bar with a wrench to secure bracket between joists. As the hex bar is tightened, bracket ends bite into the joists, holding the unit secure.



3 Pull cable through installed NM cable connector. Reattach box, and center it in hole. Attach fan/fixture bracket with supplied screws.

FAN/FIXTURE BOX RATING AND NUMBER OF SINGLE CONDUCTORS

CATALOG NUMBER	CUBIC INCHES	UL	CSA	UL FIXTURE	CSA FIXTURE	# OF SINGLE CONDUCTORS		
		FAN LOAD RATING (LBS.)	FAN LOAD RATING (LBS.)	STATIC RATING (LBS.)	STATIC RATING (LBS.)	#14	#12	#10
FBR54200R	20.0	70 @ 24" o.c. 70 @ 16" o.c.	50	70 @ 24" o.c. 150 @ 16" o.c.	50	-	-	-
FBR5420R	20.0	35	50	50	50	10	8	8
FBR5420SC	20.0	70	50	70	50	10	8	8
FBS1423*	23.0	70	50	70	50	-	-	-
FBS405	6.0	70	50	200	50	4	3	3
FBS405T	6.0	70	50	200	50	4	3	3
FBS407	8.0	70	50	200	50	4	3	3
FBS407T	8.0	70	50	200	50	4	3	3
FBS415	14.6	70	50	200	50	7	6	6
FBS415S	14.6	70	50	70	50	7	6	6
FBS420	20.0	70	50	200	50	10	8	8
FBS420S	20.0	70	50	70	50	10	8	8
FBX900	14.5	70	50	70	50	7	6	5
FN430F	30.5	-	-	50	50	-	-	-
FN440F	39.5	-	-	50	50	-	-	-
FS420SCL	20.0	-	-	50	50	10	8	8
FS427SCL	30.0	-	-	50	50	10	8	8
FSC405R	5.0							
MB8	6.1	70	50	200	50	3	-	-

