

STAINLESS STEEL T CONDUIT BODY

Features:


- Manufactured in Type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Solid stainless construction permits easy installation using ordinary hand tools
- The flat back design allows extra wiring capacity
- No minimum package qty. required
- Cover and Gasket set included
- Form 8 Style

Certifications and Compliances:

- UL / cUL 514A Listed
- UL file number _ E307133
- Article 314, "National Electrical Code" (NEC)
- Canadian Electrical Code (CEC), Part 1, Standard for Electrical Installations

Material:

Body - 316SS
Gasket - Neoprene
Cover and Screws: 316SS

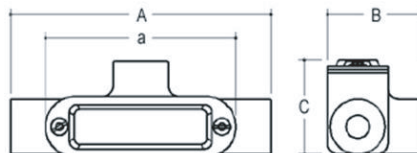

Applications:

To connect and change direction of conduit runs. Can be used as pulling fittings.
Accessible wiring chamber provides a spacious location to make splices.

Industries Commonly Served:

- Food & Beverage Production
- Marine & Coastal Facilities
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical
- Pulp & Paper Mills

Part Number	Trade Size	A	B	C	a	Cubic Inches	Weight (each) Per lb.
S60500TE00	1/2"	5.940"	2.132"	2.030"	4.320"	5"	1.28
S60700TE00	3/4"	6.538"	2.474"	2.320"	4.940"	9"	1.89
S61000TE00	1"	7.690"	2.830"	2.330"	5.650"	13"	2.50
S61200TE00	1-1/4"	8.520"	3.190"	2.900"	6.530"	24"	3.50
S61500TE00	1-1/2"	9.923"	3.585"	3.000"	7.810"	35"	5.00
S62000TE00	2"	12.30"	4.700"	3.880"	10.00"	77"	9.82
S62500TE00	2-1/2"	15.29"	6.200"	4.550"	12.00"	160"	14.32
S63000TE00	3"	15.33"	6.280"	4.520"	12.00"	177"	15.00
S64000TE00	4"	18.34"	7.610"	5.930"	14.63"	382"	30.00

*All dimensions are for informational purposes only *Tolerances +/- 5%*

