

STAINLESS STEEL TB CONDUIT BODY




Features:

- Manufactured in Type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Solid stainless construction permits easy installation using ordinary hand tools
- The flat back design allows extra wiring capacity
- No minimum package qty. required
- Cover and Gasket set included
- Form 8 style

Certifications and Compliances:

UL 514A Listed
UL File # E307133
Intended for installation in accordance with Article 314 of
ANSI/NFPA 70, "National Electrical Code" (NEC)
Approved for Wet Locations

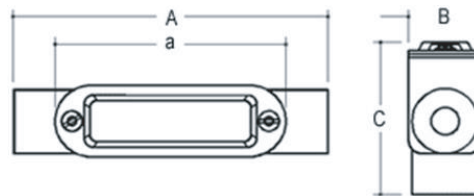

Material:

Body: 316SS
Gasket: Neoprene
Cover and Screws: 316SS

Applications:

To connect and change direction of conduit runs. Can be used as pulling fittings.
Accessible wiring chamber provides a spacious location to make splices.

Industries Commonly Served:

- Food & Beverage Production
- Marine & Coastal Facilities
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical
- Pulp & Paper Mills
- Along with other corrosive environments

Part Number	Trade Size	A	B	C	a	Cubic Inches	Weight (each) Per lb.
S60500TB00	1/2"	5.994"	1.350"	2.847"	4.320"	5"	1.10
S60700TB00	3/4"	6.538"	1.550"	3.215"	4.950"	9"	1.75
S61000TB00	1"	7.690"	1.750"	3.234"	5.650"	13"	2.25
S61500TB00	1-1/2"	9.923"	2.530"	4.150"	7.810"	35"	5.25
S62000TB00	2"	12.554"	3.500"	4.500"	10.00"	77"	7.90

*All dimensions are for informational purposes only *Tolerances +/- .5%*