
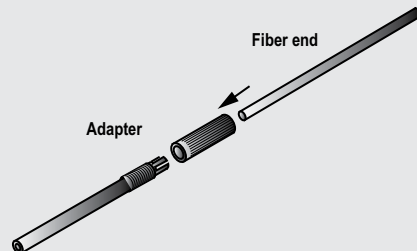
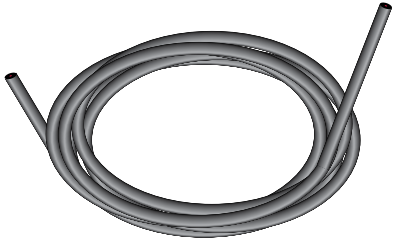


Fiber Optic Accessories

	Model Specific Features	General Features	Image	Model Number
Fiber Cutters	Plastic fiber cutter	single cutter	 NOTE: Adaptors used with Q45, OMNI-BEAM, ECONO-BEAM, MAXI-BEAM and VALU-BEAM sensors only.	PFC-4
		100 cutters		PFC-4-100
	For use with 0.25 and 0.5 mm diameter cables.	• These kits are used with unterminated plastic fiber cables • Each kit contains 40 sensor adaptors and 10 cutter assemblies		PFK20
	For use with 1 and 1.5 mm diameter cables.			PFK40
Plastic Fiber Field-Installable Sheathing	May be used with bifurcated fiber assemblies having M6 x 0.75 threaded end tips (e.g., PBCT46U, PBP46U, PBT46UHT1 and PBT66U).	• Stainless steel sheathing with stainless steel end fittings (one end internally threaded to capture fiber end tips, other end non-threaded) is used in applications where protection is required for plastic fiber optic cables • All models listed are 1.8 m in length • Other lengths are available by contacting Banner Applications Department		PFS69S6T
	May be used with individual or bifurcated fiber assemblies having M4 x 0.7 threaded end tips (e.g., PBCT26U, PBPF26U, PIP46U, PIT46U and PIT66U).			PFS53S6T
	May be used with individual fiber assemblies having M3 x 0.5 threaded end tips (e.g., PIP26U, PIT26U and PIT1X46U).			PFS44S6T
Plastic Fiber Adapters	Use to adapt plastic fiber optic cables with outside jacket diameter of 1.0 mm, such as PIT26U and PBP16U.	• Compression fitting adapters are used with small-diameter unterminated plastic fiber cables • Use when interfacing small-diameter plastic fibers to D10, D12, QM42, QS18, R55F, FI22 and MINI-BEAM plastic fiber sensor families • Each kit contains 100 pairs of adapters. One pair will interface either one bifurcated fiber optic cable or a pair of individual cables to a fiber optic amplifier		UPFA-1-100
	Use to adapt plastic fiber optic cables with outside jacket diameter of 1.25 mm or 1.3 mm, such as PBCT26U and PBF46UM3MJ1.3.			UPFA-2-100

Unterminated Individual and Bifurcated Plastic Fibers	Core	Length	Type	Drawing	Model Number
	0.5 mm	9 m	Single		PIU230U
		18 m			PIU260U
	1.0 mm	9 m	Single		PIU430U
		18 m			PIU460U
	1.5 mm	9 m	Single		PIU630U
		18 m			PIU660U
	1.0 mm	9 m	Duplex		PBU430U
		18 m			PBU460U