

S18L Series


Barrel-Mount Indicator



- Designed for panel-mount or stand-alone applications
- Daylight visible models available for use in outdoor applications or in areas with high levels of ambient light
- Up to three colors available in one device allowing one S18L to replace three conventional panel indicators
- Compact and light weight, extremely rugged; overmolded IP69K-rated design
- Terminal connection models have color-coded screw heads for quick, error-free wiring
- Cordsets and brackets available see page 452


S18L Multi-Color General-Purpose

Example Model Number: S18LGRYPQ

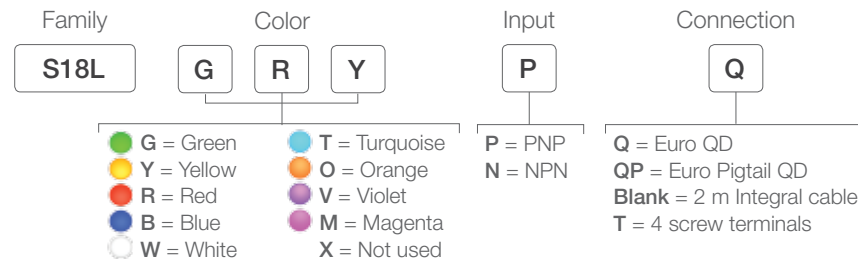


S18DL Daylight Visible General Purpose

Example Model Number: S18DLGRYPQ

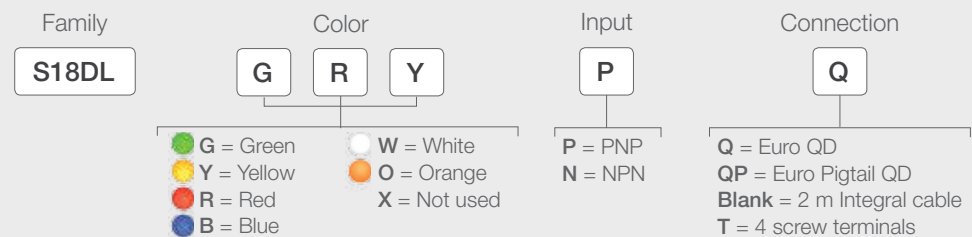

S18DLH Daylight Visible High-Intensity

Example Model Number: S18DLHGQ

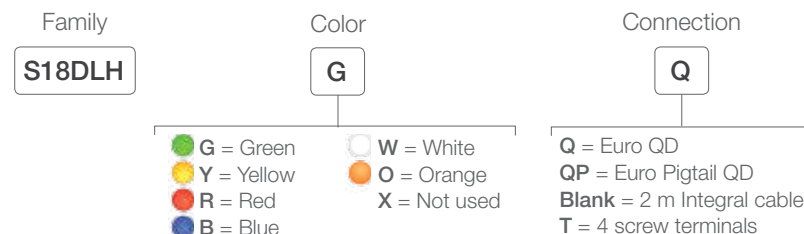

For more specifications see page 453.



Connection Option: A model with a QD requires a mating cordset (see page 452).

Single-color models are available. Colors are independently selectable. Contact factory for other colors and color combinations.



4-Pin

Euro-Style
Straight connector models listed; for right-angle, add **RA** to the end of the model number (example, **MQDC-406RA**)

MQDC-406
2 m (6.5')
MQDC-415
5 m (15')
MQDC-430
9 m (30')

Additional cordset information is available.
See page 758



SMB18A



SMBAMS18P



SMB18FA



SMBAMS18RA

Additional bracket information is available.
See page 723



35.7 mm
ø 16.0 mm
ø 18.0 mm

S18L Cabled



35.7 mm

S18L QD




34.6 mm

S18L Field Wired




ø 16.0 mm
ø 26.0 mm
ø 22.0 mm
35.7 mm

S22L Cabled



35.3 mm

S22L QD



34.2 mm

S18L Field Wired