




MultiHop Modbus Radios

MultiHop Modbus Data Radios extend the range of Modbus or other Serial communication networks. Each radio may be set to act as either a master, repeater or slave. Models are available with built in discrete and analog I/O, which can be accessed using the Modbus protocol.


Key Features:

- Self-healing, auto routing RF network with multiple hops extends the network's range
- Flexible: DIP switch selectable to be a master, repeater or slave
- User-selectable communication between RS-485 and RS-232


MultiHop Modbus Radios

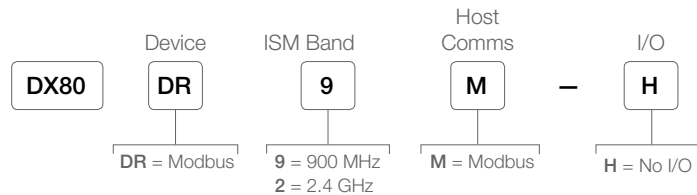

MultiHop Modbus Radios with I/O

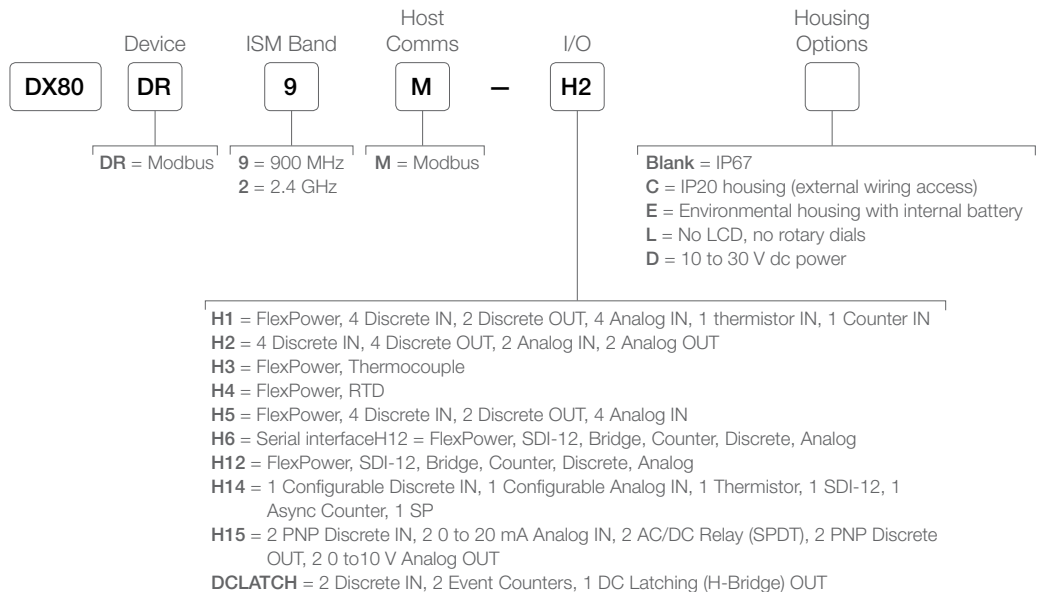

MultiHop Modbus Radios with I/O — Board Models

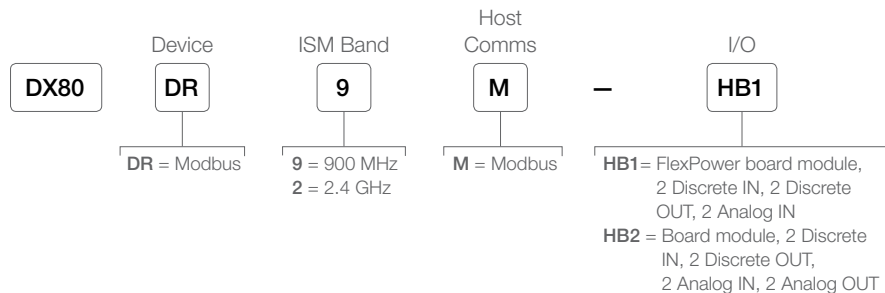

MultiHop Modbus Radios with I/O Specifications*

Radio Range	900 MHz, 1 Watt: Up to 9.6 km (6 miles)	2.4 GHz, 65 mW: Up to 3.2 km (2 miles)
Minimum Separation Distance	900 MHz, 1 Watt: 4.57 m (15 ft)	2.4 GHz, 65 mW: 0.3 m (1 ft)
Radio Transmit Power	900 MHz, 1 Watt: 30 dBm (1 W) conducted (up to 36 dBm EIRP)	2.4 GHz, 65 mW: 18 dBm (65 mW) conducted, less than or equal to 20 dBm (100 mW) EIRP
Power	<i>FlexPower</i> models: 10 to 30 V dc (Outside the USA: 12 to 24 V dc, $\pm 10\%$) on the brown wire, or 3.6 to 5.5 V dc low power option on the gray wire 6 Integrated battery models: 3.6 V dc low power option from an internal battery or 10 to 30 V dc Master radio consumption (900 MHz): Maximum current draw is < 100 mA and typical current draw is < 30 mA at 24 V dc (2.4 GHz consumption is less) Repeater/slave radio consumption (900 MHz): Maximum current draw is < 40 mA and typical current draw is < 20 mA at 24 V dc (2.4 GHz consumption is less)	
Compliance	900 MHz Compliance (1 Watt) FCC ID UE3RM1809: This device complies with FCC Part 15, Subpart C, 15.247 IC: 7044A-RM1809	2.4 GHz Compliance FCC ID UE300DX80-2400 - This device complies with FCC Part 15, Subpart C, 15.247 ETSI/EN: In accordance with EN 300 328: V1.8.1 (2012-04) IC: 7044A-DX8024
Spread Spectrum Technology	FHSS (Frequency Hopping Spread Spectrum)	
Antenna Connection	Ext. Reverse Polarity SMA, 50 Ohms	Max Tightening Torque: 0.45 N-m (4 lbf-in)
Interface	Indicators: Two bi-color LEDs	Buttons: Two Display: Six character LCD
Communication Hardware (MultiHop RS-485)	Interface: 2-wire half-duplex RS-485 Baud rates: 9.6k, 19.2k (default), or 38.4k via DIP switches; 1200 and 2400 via the MultiHop Configuration Tool Data format: 8 data bits, no parity, 1 stop bit	
Packet Size (MultiHop)	900 MHz: 175 bytes (85 Modbus registers)	2.4 GHz: 75 bytes (37 Modbus registers)
Intercharacter Timing (MultiHop)	3.5 milliseconds	
Housing	Polycarbonate housing and rotary dial cover; polyester labels; EDPM rubber cover gasket; nitrile rubber, non-sulphur cured button covers Weight: 0.26 kg (0.57 lbs) M-Hx and M-HxC models: Mounting: #10 or M5 (SS M5 hardware included) M-HxE models: Mounting: 1/4-in or M7 (SS M7 hardware included) Max. Tightening Torque: 0.56 N-m (5 lbf-in)	
Wiring Access	M-Hx models: Four PG-7, One 1/2-in NPT, One 5-pin threaded M12/Euro-style male quick-disconnect M-HxC models: External terminals M-HxE models: Two 1/2-in NPT ports	
Environmental Rating	M-Hx: IEC IP67; NEMA 6 "C" Housing Models: IEC IP20; NEMA 1 "E" Housing Models: IEC IP65; NEMA 4X	
Operating Conditions	M-Hx and M-HxC models: -40 °C to +85 °C (-40 °F to +185 °F) (Electronics); -20 °C to +80 °C (-4 °F to +176 °F) (LCD) M-HxE models: -40 °C to +65 °C (-40 °F to +149 °F) (Electronics); -20 °C to +80 °C (-4 °F to +176 °F) (LCD) 95% maximum relative humidity (non-condensing) Radiated Immunity: 10 V/m (EN 61000-4-3)	
Shock and Vibration	IEC 68-2-6 and IEC 68-2-27 Shock: 30g, 11 millisecond half sine wave, 18 shocks Vibration: 0.5 mm p-p, 10 to 60 Hz	
Certifications		

* See datasheet for model specific details