


Model 668RP



- White polymeric grille
- Rectangular fan light
- Fits in 2" x 6" ceiling construction
- 24" adjustable hanger bars
- Mounting brackets that adjust for ceiling thickness up to 3/4"


Models 8663RP & 8664RP

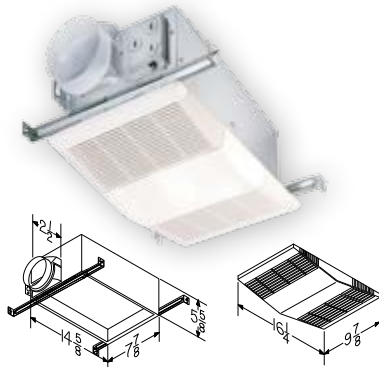

- Round design eliminates squaring with bathroom walls
- Fits 2" x 6" ceiling construction
- 8663RP features bright 100W incandescent lighting with 7W night light for security and safety (bulbs not included)
- 8664RP features bright 100W incandescent lighting (bulb not included)
- 24" adjustable hanger bars


Model	CFM	Sones	Lighting	Finish
668RP	70	4.0	100W	White
8663RP	100	3.5	100/7W	White
8664RP	100	3.5	100W	White

Models 769RL, 763RLN, and 769RFT

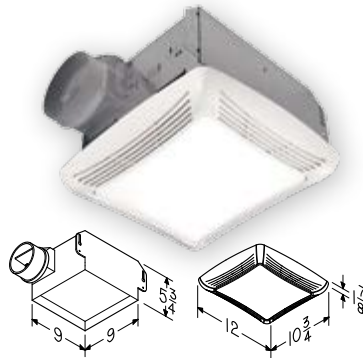


- White polymeric grille
- Fits in 2" x 6" ceiling construction
- 769RFT uses 13W fluorescent bulb (not included)
- All models available in Project Packs

Model 671R & 672R

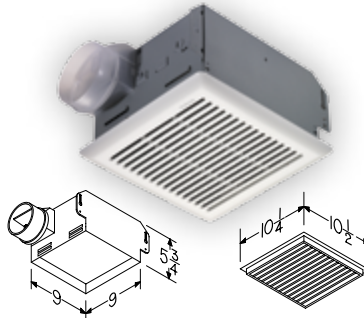

Model 695 & 696N

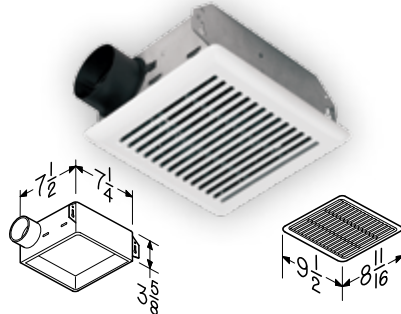


- 50 to 110 CFM centrifugal blower wheel
- Double-strength steel mounting flanges with keyhole slots for fast installation
- Metal grille kits for 695 & 696N S97011308
- UL Listed for use over tub or shower when installed in a GFCI protected branch circuit
- *All models available in Project Packs

Model	CFM	Sones	Notes
769RL	70	3.0	100W White
763RLN	50	2.5	100W White
769RFT	70	3.0	13W fluor. White
671R	90	3.0	Wall/Ceiling mount
672R	110	4.0	Wall/Ceiling mount
695	70	6.0	Wall/Ceiling mount
696N	50	4.0	Wall/Ceiling mount


Available in single packs or project packs.

Model 8814R

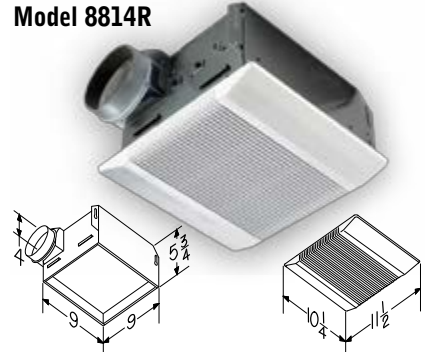

- 80 to 110 CFM
- Centrifugal blower wheel and 4-pole motor deliver high exhaust capacity at low sound levels
- Mounting flanges with keyhole slots for fast installation
- White polymeric grille with torsion spring mounting

Model 8832WH

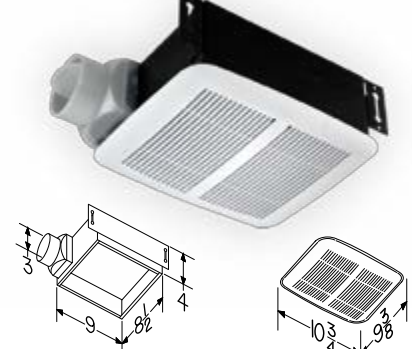

- White polymeric grille with torsion spring mounting
- Fits 2"x4" construction

Model 8832SA



- Silver anodized aluminum grille
- Fits 2"x4" construction

Model	CFM	Sones	Notes
8814R	110	4.0	
8832WH	80	2.5	Not UL tub & shower
8832SA	80	2.5	Not UL tub & shower

Ventilation Fans—Wall Control Selection Guide

		57W, 57V	59W	64W, 64V	66W, 66V	68W, 68V	69WL 69VL	70TW	72W, 72V	77DW, 77DV	78W, 78V	269WL, 269VL	685WL, 685VL	CFT12WH	DH100W	VS63WH	VS66WH	VS67WH	VS68WH	VS69WH
Ventilation Fans	50NT, 80NT	•	•	•			•	•	•					•	•					
	671R, 672R		•	•				•						•	•	•				
	682NT		•	•				•						•		•				
	695, 696N	•	•	•				•	•					•	•	•				
	8814R, 8832SA, 8832WH		•	•				•						•	•	•				
	HD50NT, HD80NT	•	•	•			•	•	•					•	•					
	LPN80	•		•			•	•	•					•						
	QT Fans*	•	•	•			•	•	•		•	•		•	•	•				
	QTRN050			•			•				•	•								
	QTXEN110S						•				•									
	XN110H					•	•													
	XN50, XN80, XN110			•			•					•		•						
	ZN110H						•													
	ZN80, ZN110					•						•	•							
	ZN80M, ZN110M					•	•													
Ventilation Fan/Lights	668RP	•	•	•		•		•	•					•	•	•	•		•	
	742RBNT	•	•	•		•		•	•			•		•	•		•		•	
	744NT, 744FLNT		•			•		•						•	•		•		•	
	744SFLNT		•			•									•		•		•	
	763RLN, 769RFT, 769RL		•	•		•		•				•		•	•		•		•	
	778WHNT	•		•			•	•	•			•		•						
	8663RP	•		•	•			•	•			•		•	•			•		•
	8664RP	•	•	•		•		•	•			•		•	•		•		•	
	HD50LNT, HD80LNT	•		•		•		•	•	•		•		•	•	•				
	QT Fan/Lights	•		•	•			•	•			•	•	•	•			•		•
	QTNLEDA, QTNLEDB	•		•	•			•	•				•	•	•			•		•
	QTXEN110SFLT, QTXN110SL		•							•										
	XN110HL				•					•										
	XN50L, XN80L, XN110L				•							•	•	•						
	ZN110HL				•															
	ZN80L, ZN110L									•		•								
	ZN80ML, ZN110ML									•										
Heater/ Fan/Lights	605RP	•	•					•	•								•	•		•
	665RP		•					•					•			•		•		•
	765HL, 765HFL	•	•		•			•	•						•					
	9412D															•				
	9417DN		•			•		•								•	•		•	
	9422P		•		•	•										•	•		•	
	9427P		•		•			•								•	•	•	•	•
	9905	•	•					•	•							•	•		•	
	9960															•		•		•
	9965							•		•										
	QT9093WH, 9093WH							•		•										
	QTXN110HL, QTXN110HFL	•	•		•			•	•	•										
Utility Fans	8210, 8310, QT200	•	•					•	•						•	•				
	QT300		•					•	•						•	•				

* Does not include models QT200 and QT300.

Ventilation Fans—Product Specifications

Fan/Lights continued

	Page	CFM	Sones HVI certified	Baths up to () Sq Ft	Rooms up to () Sq Ft	Lighting Watts Main/Night Light	ENERGY STAR®	Duct Size"	Housing Dimensions			Grille Dimensions			Grille finish	Amps
									L"	W"	H"	L"	W"	D"		
XN110HL	17	110	<0.3	100	—	2-18W GU24/4W	Yes	6	10½	11½	7½	13½	14	—	White Polymeric	1
XN110L	17	110	<0.3	100	—	2-18W GU24/4W	Yes	6	10½	11½	7½	13	13¾	—	White Polymeric	0.9
XN50L	17	50	<0.3	45	—	2-18W GU24/4W	Yes	6 or 4	10½	11½	7½	13	13¾	—	White Polymeric	0.7
XN80L	17	80	<0.3	75	—	2-18W GU24/4W	Yes	6 or 4	10½	11½	7½	13	13¾	—	White Polymeric	0.7
ZN110HL	17	110	<0.3	100	—	2-18W GU24/4W	Yes	6	10½	11½	7½	13½	14	—	White Polymeric	1
ZN110L	17	110	<0.3	100	—	2-18W GU24/4W	Yes	6	10½	11½	7½	13	13¾	—	White Polymeric	0.9
ZN110ML	17	110	<0.3	100	—	2-18W GU24/4W	Yes	6	10½	11½	7½	13½	14	—	White Polymeric	1
ZN80L	17	80	<0.3	75	—	2-18W GU24/4W	Yes	6 or 4	10½	11½	7½	13	13¾	—	White Polymeric	0.8
ZN80ML	17	80	<0.3	75	—	2-18W GU24/4W	Yes	6 or 4	10½	11½	7½	13½	14	—	White Polymeric	0.9

Utility Fans

	Page	CFM	Sones	Housing Dimensions			Grille Dimensions		Amps*	Duct"
				L"	W"	H"	L"	W"		
8210	35	210	6.5	9 Dia. x 5¼			11 Diameter		0.82	7
8310	35	160	5.0	13½	11½	3½	11 Diameter		1.0	3¼ x 10
QT200	35	200	2.0	14¾	10	9	16½	12½	1.0	3¼ x 10
QT300	35	300	4.5	14¾	10	9	16½	12½	2.5	3¼ x 10

In-Line Ventilators

	Page	0.2" Ps CFM	Sones	Housing Dimensions			Duct	Amps
				Height	Duct Collar	Fan Diameter		
ILF120	36	110	—	10	3½	10	4	0.37
ILF130	36	130	—	7¾	4¾	10	5	0.37
ILF250	36	250	—	9¾	5¾	12	6	0.8
ILF360	36	360	—	13¾	7¾	13½	8	0.87
ILF530	36	530	—	11¼	9¾	13½	10	2
ILFK120	37	110	—	10	3¾	10	4	0.37
ILFK130	37	130	—	7¾	4¾	10	5	0.37
ILFK250	37	250	—	9¾	5¾	12	6	0.8
ILFK2502	37	250	—	9¾	5¾	12	6	0.8
ILRF	36	150	—	10	3¾ / 4¾	10	4 or 5	0.8

Heater/Fan/Lights

	Page	CFM	Sones, HVI- certified	Lighting Watts Main/ Night Light	Housing Dimensions			Grille Dimensions		Grille finish	Duct Size"	Amps	Total Connected Load In Watts	Element Watts	Exhaust Motor Watts	Heating Motor Watts	BTU
					L"	W"	H"	L"	W"								
605RP	40	70	4.0	—	14¾	7¾	5¾	16¼	9¾	White Polymeric	4	13.5	1620	1300	60	60	5118
665RP	40	70	4.0	100W	14¾	7¾	5¾	16¼	9¾	White Polymeric	4	14.2	1720	1300	60	60	5118
765HL	39	100	2.0	100W	16	10¾	5¾	17½	11½	White Polymeric	4	14.5	1830	1500	55	55	5120
765HFL	39	100	2.0	27W Fluor. (Incl.)	16	10¾	5¾	17½	11½	White Polymeric	4	14	1760	1500	55	55	5120
9093WH	41	70	3.5	100W/7W	13¼ Dia x 7½			15¾ Dia		White Enamel	4	14.2	1717	1500	55	55	5118
9417DN	41	70	3.5	250W	8¾	8¾	6¾	10¼	10¼	White Polymeric	4	2.6	310	—	60	—	853
9427P	41	70	3.5	2-250W	14¾	8¾	6¾	10¼	15¾	White Polymeric	4	5.0	560	—	60	—	1706
9905	40	70	4.0	—	14	9¾	7¾	16	10¾	White Polymeric	4	13.5	1620	1500	60	60	5118
9960	40	—	—	100W/7W	14	9¾	7¾	16	10¾	White Polymeric	—	13.9	1667	1500	—	60	5118
9965	40	70	4.0	100W/7W	14	9¾	7¾	16	10¾	White Polymeric	4	14.2	1727	1500	60	60	5118
QT9093WH	41	110	3.0	100W/7W	18¾	13¾	7½	15¾ Dia		White Enamel	4	14.2	1717	1500	55	55	5118
QTXN110HL	39	110	0.9	2-60W/7W	17¾	11¾	7¾	20	15	White Polymeric	6	14.6	1710	1500	55	55	5120
QTXN110HFLT	39	110	0.9	36W Fluor. (GU24 Incl.)/7W	17¾	11¾	7¾	20	15	White Polymeric	6	13.9	1626	1500	55	55	5120

Heater Only

	Page	Watts	Volts	Heating Motor Amps	BTU/hr	Housing Dimensions			Grille Dimensions		Grille finish
						W"	H"	D"	W"	H"	
9412D	41	250	120	2.1	853	8¾	8¾	6	10¼	10¼	White Polymeric
9422P	41	500	120	4.6	1706	14¾	8¾	6	15¾	10¼	White Polymeric