




SG-TL70-RGB14

▶ TL70 MODULAR LED TOWER LIGHT SEGMENTS

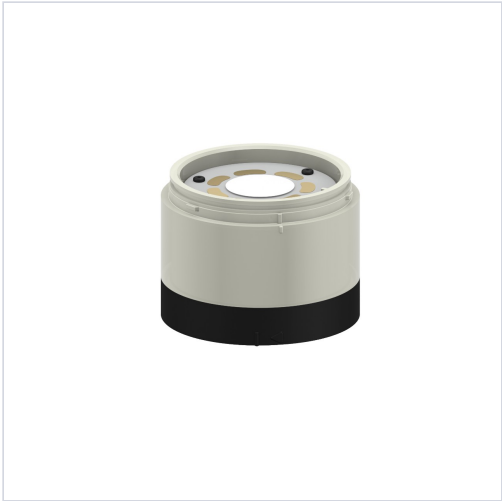

TL70 Light Module; 14-color RGB
Voltage: 12-30 V dc; Environmental Rating: IP65
Steady On/Flashing
Black Housing
Part Number: 803732

CERTIFICATIONS



SPECIFICATIONS

Housing Style	Segment - Light
Primary Housing Material	Polycarbonate
Indication	Yes
Mounting Thread	No Thread
Color Input Control	Individual (One wire/color, same number of colors as input wires)
Number of Colors / Segments	1
Product Size (mm)	70
Color Technology	RGB Configurable
Color Option 1	RGB

Animation Option 1	Dip-Switch Controlled
Max Current Color (mA)	350
Dimming Option	Dip-Switch Controlled
Max Input Response Time (ms)	50
Physical Dimensions (LxWxH or DxH mm)	70.0 x 50.0
Environmental Rating	IP65
Max Op. Relative Humidity Non-Condensing (%)	95% @ 50°C
Max Op. Temperature (°C)	50
Min Op. Temperature (°C)	-40
Storage Temp (°C)	-40 to 70
Primary Housing Color	Black
Primary Window Material	Polycarbonate Diffused
Feature: Hazardous Area	No
Feature: Audible	No
Feature: Chemical Resistant	No
Multi-Color Device	Single Color On
IO Link	No
Modbus RTU	No
Wireless	No
Pro-Editor Compatible	No



