

Calbrite™

Stainless Steel Conduit Systems

Stainless Steel Hubs

Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless threaded conduit
- Use of neoprene O-ring assures weatherproof seal
- Includes a type 316 stainless steel locknut for a secure installation
- No package qty. required



Certifications and Compliances:


Calbrite stainless steel Hubs are fabricated to UL514B and ASTM A351 Standards.

Applications:

To connect threaded stainless conduit to a threadless opening in a box or enclosure in an outdoor or indoor location. To positively bond conduit to a box or enclosure.

Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Marine & Coastal Facilities
- Pulp and Paper Mills
- Along with other corrosive environments

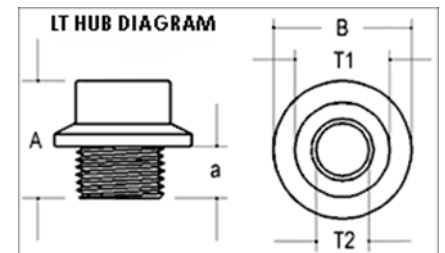

Size	Part Number	A	B	a	T1	T2	Male Thread O.D.	Weight (ea) per lb.
1/2"	S60500LT00	1.580"	1.625"	.625"	1.040"	.770"	.840"	0.19
3/4"	S60700LT00	1.525"	1.875"	.625"	1.280"	.980"	1.050"	0.25
1"	S61000LT00	1.830"	2.125"	.650"	1.600"	1.240"	1.315"	0.45
1-1/4"	S61200LT00	2.050"	2.500"	.850"	1.970"	1.580"	1.660"	0.67
1-1/2"	S61500LT00	2.070"	2.625"	.870"	2.210"	1.820"	1.900"	0.72
2"	S62000LT00	2.100"	3.125"	.800"	2.750"	2.300"	2.375"	1.08
2-1/2"	S62500LT00	2.250"	3.625"	.850"	3.310"	2.730"	2.875"	1.91
3"	S63000LT00	2.880"	4.375"	.930"	3.880"	3.350"	3.500"	2.43
4"	S64000LT00	3.180"	5.500"	1.060"	5.000"	4.340"	4.500"	4.09

*All dimensions are for informational purposes only * Tolerances +/- 5%*