

Calbrite™

Stainless Steel Conduit Systems

Stainless Steel Three Piece Couplings

Features:

- Manufactured in type 316L stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless threaded conduit
- Machined tapered female threads for smooth bore inside diameter
- No package qty. required



Certifications and Compliances:




- UL and CUL 514B / ANSI approved
- UL file number – E308159
- Full NEC code compliance

Applications:

To join and connect threaded ends of stainless conduit where neither length of conduit can be turned.

Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical
- Pulp & Paper Mills
- Marine & Coastal Facilities
- Along with other corrosive environments

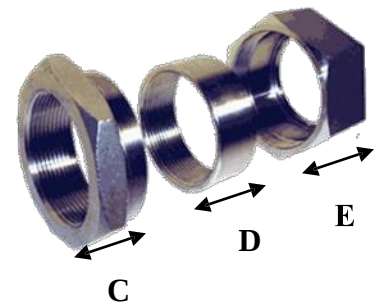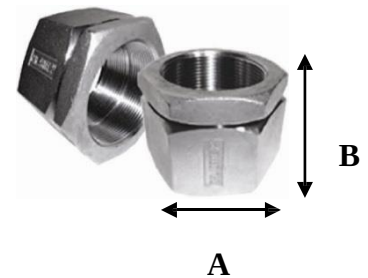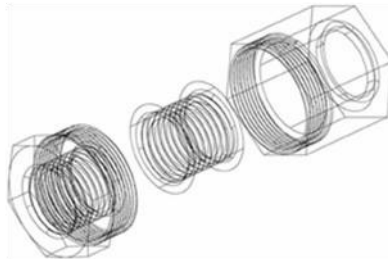

Size	Part Number	A	B	C	D	E	Female Thread I.D.	Weight (ea) per lb.
1/2"	S605003U00	1.510"	1.680"	0.800"	0.750"	1.240"	.840"	0.44
3/4"	S607003U00	1.790"	1.750"	0.810"	0.770"	1.305"	1.050"	0.58
1"	S610003U00	2.150"	2.130"	1.030"	0.975"	1.580"	1.315"	0.94
1-1/4"	S612003U00	2.540"	2.150"	1.030"	0.985"	1.590 "	1.660"	1.19
1-1/2"	S615003U00	2.870"	2.150"	1.030"	1.000"	1.600"	1.900"	1.47
2"	S620003U00	3.520"	2.240"	1.040"	1.000"	1.680"	2.375"	2.27
2-1/2"	S625003U00	3.450"	3.780"	1.580"	1.600"	2.530"	2.875"	3.09
3"	S630003U00	4.050"	3.430"	1.610"	1.650"	2.790"	3.500"	2.92
4"	S640003U00	5.250"	4.115"	1.770"	1.790"	2.860"	4.500"	6.44

All dimensions are for informational purposes only *Tolerances +/-5%