

Carlon®

Liquidtight Flexible Non-Metallic Conduit & Fittings

T&B Catalog Number:



LT43H
03448108570
Active

UPC Number:


Status:

Description:

1-1/2 Inch, Straight, Two-Piece Liquidtight Non-Metallic Fitting, UL E32447, Temperatures up to 107 Degrees C, Nitril Rubber O-Ring, PVC, Grey

Features

Non-conductive and non-corrosive.
Resistant to oil, acid, ozone and alkaline.
Easy to install.
Approved for indoor and outdoor locations
UL listed for wet locations
Nitrile rubber 'O' ring for a liquidtight termination.
Temperatures up to 225 degree F (107 degree C)
Meets UL standard 514B.

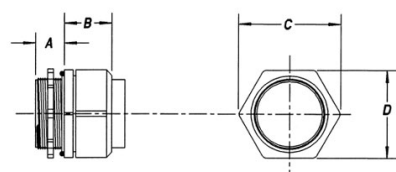

Application

For use with Carflex conduit and Carflex X-Flex conduit.

General

Trade Size (inches) 1 1/2
Material Non-Metallic

Dimension Information

Size (inches) 1 1/2
Degree of Bend Straight
A (inches) 0.75
B (inches) 1.36
C (inches) 2.78
D (inches) 2.43

Packaging

T&B Order Multiple 5
Package in Units 5
T&B Sold in UOM Each
T&B Weight Per UOM 32.5 lbs. per 100

Application Support

T&B Sales Drawings wsd-ac02107
Product Overview-Carflex Liquidtight Flex-Available on Website
ible Tubing

Certifications

RoHS Compliance No

Certifications



File Nbr:
E 32447