


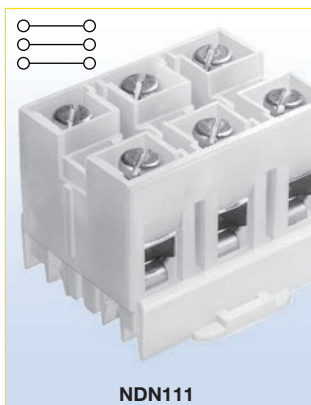

Approval

Technical Data	
Rated voltage	600V
Rated Current	90A
Center spacing in (mm)	0.635 / 16.13
Conductor cross-section, flexible (AWG/mm ²)	18~2 / 0.8~33.6
Number of Poles	1
Circuits per foot	18
Torque(N•m)	3.6
Torque(lb-in)	32
Screw	1/4-28
WxHxD(mm)	15 x 30.3 x 43.5


Colors Cat. No.

○ White (Standard) NDN1-WH

Accessories Cat. No.

	MT12-1-2
35mm DIN-Rail	NDNA Series DRL35MML DRL35MMHI
C-Rail	NFTA Series
C-Rail (low profile)	NRA Series
	NDN1A-WH

Dimensions - in (mm)



Approval

Technical Data	
Rated voltage	600V
Rated Current	90A
Center spacing in (mm)	0.635 / 16.13
Conductor cross-section, flexible (AWG/mm ²)	18~2 / 0.8~33.6
Number of Poles	3
Circuits per foot	18
Torque(N•m)	3.6
Torque(lb-in)	32
Screw	1/4-28
WxHxD(mm)	47.5 x 36.6 x 43.5

Colors Cat. No.

○ White (Standard) NDN111-WH
● Black NDN111-BK
● Blue NDN111-BL
● Yellow NDN111-YE
● Red NDN111-RE

Accessories Cat. No.

2 circuits	JN1
	MT12-1-2
35mm DIN-Rail	NDNA Series DRL35MML DRL35MMHI
C-Rail	NFTA Series
C-Rail (low profile)	NRA Series
	NDN111A-WH, NDN111A-BK, NDN111A-YE

Dimensions - in (mm)

