
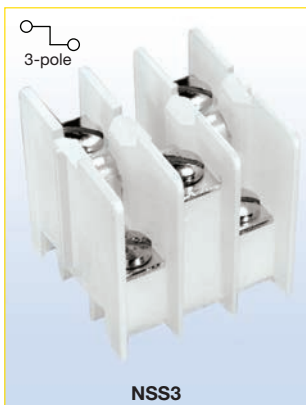
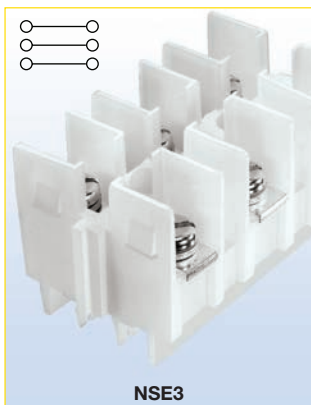


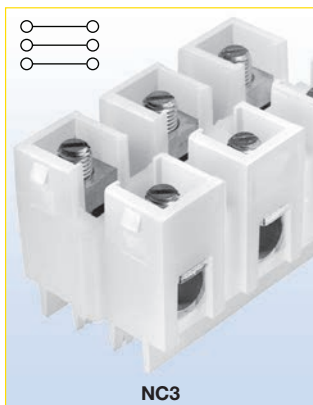

| Approval   |                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Technical Data                                                                                                                                                               |                          |
| Rated voltage                                                                                                                                                                | 600V                     |
| Rated Current                                                                                                                                                                | 175A                     |
| Center spacing in (mm)                                                                                                                                                       | 1.06 / 26.92             |
| Conductor cross-section, flexible (AWG/mm <sup>2</sup> )                                                                                                                     | 14~2/0 / 2.5~70<br>Cu/AL |
| Number of Poles                                                                                                                                                              | 3                        |
| Circuits per foot                                                                                                                                                            | 11                       |
| Torque(N•m)                                                                                                                                                                  | 5.1                      |
| Torque(lb-in)                                                                                                                                                                | 45                       |
| Screw                                                                                                                                                                        | 5/16 - 24                |
| WxHxD(mm)                                                                                                                                                                    | 79.4 x 44.5 x 44.5       |
| Colors                                                                                                                                                                       | Cat. No.                 |
| ○ White (Standard)                                                                                                                                                           | NC3-WH                   |
| ● Black                                                                                                                                                                      | NC3-BK                   |

| Approval   |                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Technical Data                                                                                                                                                               |                        |
| Rated voltage                                                                                                                                                                | 600V                   |
| Rated Current                                                                                                                                                                | 115A                   |
| Center spacing in (mm)                                                                                                                                                       | 1.06 / 26.92           |
| Conductor cross-section, flexible (AWG/mm <sup>2</sup> )                                                                                                                     | Ring Terminals<br>Only |
| Number of Poles                                                                                                                                                              | 3                      |
| Circuits per foot                                                                                                                                                            | 11                     |
| Torque(N•m)                                                                                                                                                                  | 3.6                    |
| Torque(lb-in)                                                                                                                                                                | 32                     |
| Screw                                                                                                                                                                        | 1/4 - 28               |
| WxHxD(mm)                                                                                                                                                                    | 79.2 x 38.9 x 44.5     |
| Colors                                                                                                                                                                       | Cat. No.               |
| ○ White (Standard)                                                                                                                                                           | NSE3-WH                |

| Approval   |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Technical Data                                                                                                                                                                |                        |
| Rated voltage                                                                                                                                                                 | 600V                   |
| Rated Current                                                                                                                                                                 | 30A                    |
| Center spacing in (mm)                                                                                                                                                        | 0.385 / 9.77           |
| Conductor cross-section, flexible (AWG/mm <sup>2</sup> )                                                                                                                      | Ring Terminals<br>Only |
| Number of Poles                                                                                                                                                               | 3                      |
| Circuits per foot                                                                                                                                                             | 28                     |
| Torque(N•m)                                                                                                                                                                   | 1.4                    |
| Torque(lb-in)                                                                                                                                                                 | 12                     |
| Screw                                                                                                                                                                         | #6-32                  |
| WxHxD(mm)                                                                                                                                                                     | 31.5 x 33.7 x 31.8     |
| Colors                                                                                                                                                                        | Cat. No.               |
| ○ White (Standard)                                                                                                                                                            | NSS3-WH                |
| ● Black                                                                                                                                                                       | NSS3-BK                |

| Accessories          | Cat. No.    |
|----------------------|-------------|
| MT12-1-2             |             |
| Panel Mount          |             |
| C-Rail               | NFTA Series |
| C-Rail (low profile) | NRA Series  |

| Accessories          | Cat. No.    |
|----------------------|-------------|
| 2 circuits           | JNSE3       |
| MT12-1-2             |             |
| Panel Mount          |             |
| C-Rail               | NFTA Series |
| C-Rail (low profile) | NRA Series  |

| Accessories          | Cat. No.    |
|----------------------|-------------|
| 2 circuits           | JNSS3       |
| MT12-1-2             |             |
| C-Rail               | NFTA Series |
| C-Rail (low profile) | NRA Series  |

