

HLS, HLT, PCT**Specifications**

Description: Fuse holders for GMT indicating fuses.

Poles: 01 to 25.

Ratings:

Volts: — 60Vdc/125Vac

Agency information:

CE, UL Recognized,
Guide IZLT2, File
E14853, 15A (60Vdc).

Flammability rating:

UL 94V0.

Features and benefits

- Multiple configurations provide application flexibility
- Compact size saves space

Typical applications

- Telecommunications DC power circuit protection

Catalog numbers

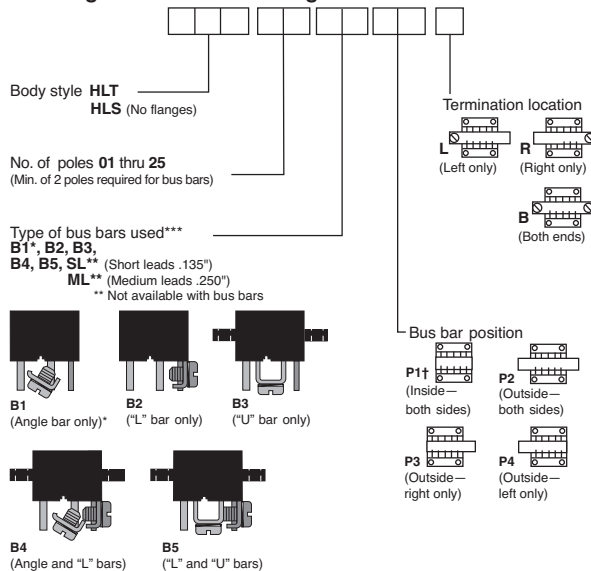
Catalog numbers	Poles
PCT	1
HLS	1-25 see build-a-code
HLT	1-25 see build-a-code



GMT - Dummy



GMT - A (Alarm)

Multiple fuse holders with bus bars
Ordering information— catalog no.

*Angle bar mounts on common or center terminals only.

**SL version is not available with bus bars.

†Minimum of 4-poles required.

***0.38 max. leads if not specified.

Data Sheet: 5010

GMT**Specifications**

Description: Fast-acting fuses for use in HLT, HLS, and PCT fuse holders.

Ratings:

Volts: — 60Vdc/125Vac

Amps: — $\frac{18}{100}$ -15A

IR: — 450A@60Vdc

— 300A@125Vac

Agency information: CE, UL Recognized, Guide JFHR2, File E56412.

Flammability rating: UL 94V0.

Features and benefits

- Local and remote indication capability
- Color coded for easy amp rating identification

Typical applications

- Telecommunications DC power circuit protection

Catalog numbers

Catalog numbers	Color code	Catalog numbers	Color code
GMT- $\frac{1}{100}$ A	Yellow	GMT-3- $\frac{1}{2}$ A	White/Blue
GMT- $\frac{1}{4}$ A	Violet	GMT-4A	White/Brown
GMT- $\frac{1}{2}$ A	Green/Gray	GMT-5A	Green
GMT- $\frac{3}{4}$ A	Red	GMT-7- $\frac{1}{2}$ A	Black/White
GMT- $\frac{5}{8}$ A	Black	GMT-10A	Red/White
GMT- $\frac{3}{4}$ A	Brown	GMT-12A	Yellow/Green
GMT-1A	Gray	GMT-15A	Red/Blue
GMT-1- $\frac{1}{2}$ A	White	GMT-Dummy	Gray body
GMT-1- $\frac{1}{2}$ A	White/Yellow	GMT-X	Clear cover
GMT-2A	Orange	GMT-Y	Clear cover w/tab
GMT-3A	Blue		

Some GMT sizes may be sold in bulk pack only.

Accessories

- Spare fuse holder: catalog number TPSFH-T

GMT-A**Specifications**

Description: Fast-acting fuse designed specifically for use in the Telepower 15800 (page 13-6) and TP158HC (page 13-7) fused disconnect switches.

Agency information: The GMT-A has the same ratings and agency approvals as the standard GMT fuses as shown above.

Catalog numbers

Catalog number	Color code
GMT-A	Yellow

Data Sheet: 5008