

JJN 300V, Class T**Specifications:**

Description: Very fast-acting, current-limiting fuse.

Dimensions: See page 1-6 for Class T dimensions.

Ratings:

- Volts — 300Vac (or less)
 — 160Vdc (15-600A)
 — 170Vdc (601-1200A)
- Amps — 1-1200A
 IR — 200kA RMS Sym.
 — 20kA DC @ 160Vdc
 — 100kA DC @ 170Vdc

Agency information: CE, Std. 248-15, Class T, UL Listed, Guide JDDZ, File E4273, CSA Certified, Class 1422-02, File 53787, RoHS compliant.

Features and benefits:

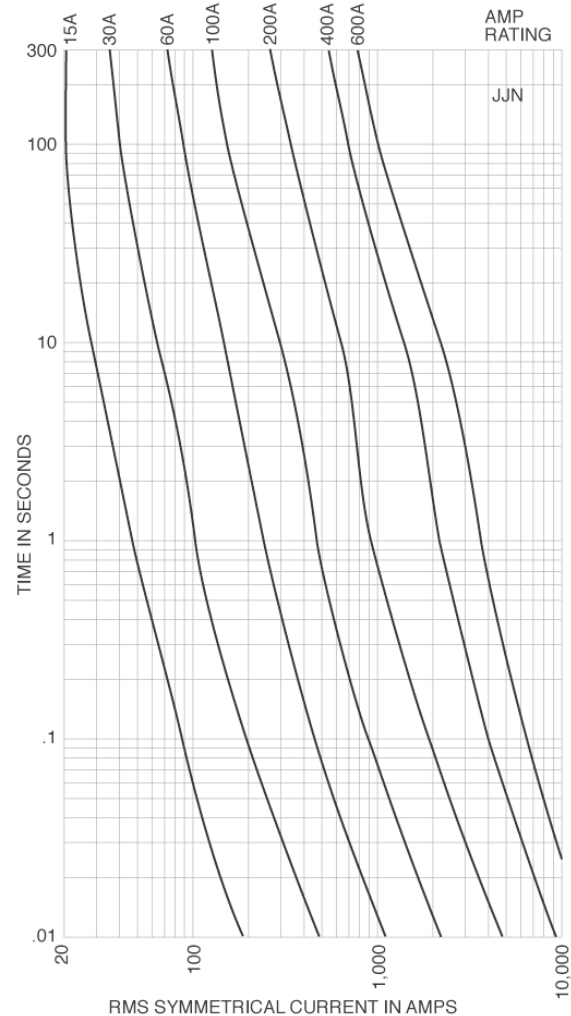
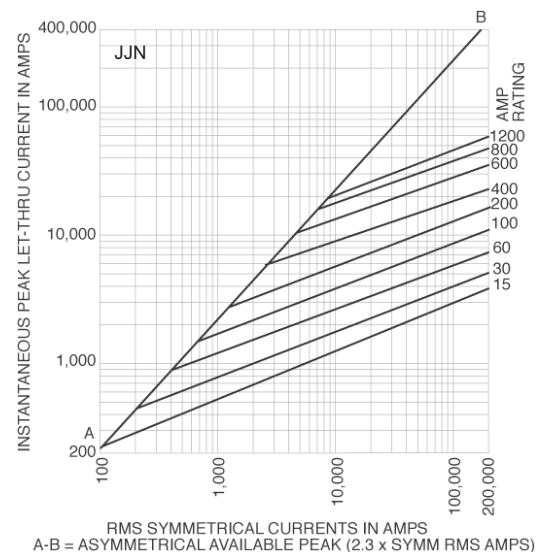
- Series combination ratings with branch circuit breakers allows broad range of coverage, independent of breaker manufacturer.
- Current limitation for non-inductive circuits provides Class T current-limiting response to maximum ground fault and short-circuit conditions.
- 200kA interrupting rating provides high ratings at all circuit locations.
- Small footprint allows more efficient use of available space.

Typical applications:

- Large apartment complexes
- Multi-family meter stacks
- VFD line protection

Catalog numbers (amps)

JJN-1	JJN-15	JJN-40	JJN-80	JJN-150	JJN-300	JJN-600
JJN-2	JJN-20	JJN-45	JJN-90	JJN-175	JJN-350	JJN-700
JJN-3	JJN-25	JJN-50	JJN-100	JJN-200	JJN-400	JJN-800
JJN-6	JJN-30	JJN-60	JJN-110	JJN-225	JJN-450	JJN-1000
JJN-10	JJN-35	JJN-70	JJN-125	JJN-250	JJN-500	JJN-1200

**Time-current characteristic curves—average melt****Current limitation curves****Recommended fuse holders and blocks for Class T fuses**

- See page 1-3

Data Sheet: 1025