

T600**Specifications**

Description: T600 (600V) fuse blocks for use with Class T fuses (Bussmann series JJS).

Dimensions: See dimensions illustrations.

Poles: 1 to 3

Ratings:

Volts: — 600Vac/dc

Amps: — ½ - 600A

SCCR: — 200kA RMS Sym.

Agency information: CE, UL Listed UL 4248, Guide IZLT, File E14853, CSA Certified, Class 6225-01, File 47235.

Flammability rating: UL 94V0.

Features and benefits

- Provide 1-, 2- and 3-pole housing for 600Vac Class T fuses.
- Short-Circuit Current Rating of 200kA RMS Sym.
- Class T fuse blocks have a small foot print, providing substantial space savings in equipment

Typical applications

- 600Vac/dc or less control systems
- 600Vac/dc or less individual control circuits

**T60600-1C****T30030-2CR****Catalog numbers**

Screw	Box lug	Amps	Poles	Fig. no.	Wire range
T60030-1SR	T60030-1CR	½-30	1	1	SR #10-18 Cu CR #2-14 Cu/Al
T60030-2SR	T60030-2CR		2		
T60030-3SR	T60030-3CR		3		
T60060-1SR	T60060-1CR	31-60	1	2	CR #2-14 Cu/Al SR #10-18 Cu only
T60060-2SR	T60060-2CR		2		
T60060-3SR	T60060-3CR		3		
—	T60100-1C	61-100	1	3	2/0-14 Cu/Al
—	T60100-2C		2		
—	T60100-3C		3		
—	T60200-1C	101-200	1	4	250kcmil-6 Cu/Al
—	1B0089*		3		
—	T60400-1C		1	6	600kcmil-2/0 Cu/Al (2) 600kcmil-4/0 Cu/Al
—	T60600-1C	401-600	1	7	

* UL Listed, Guide IZLT, File E14853, CSA Certified Class 6225-01, File 21455M18

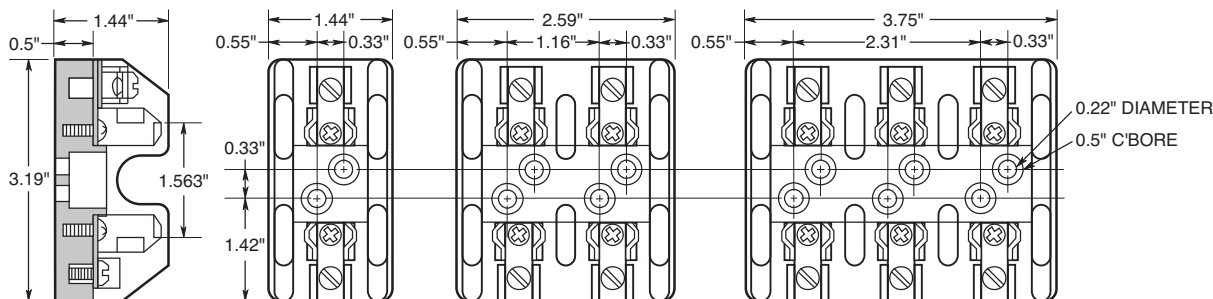
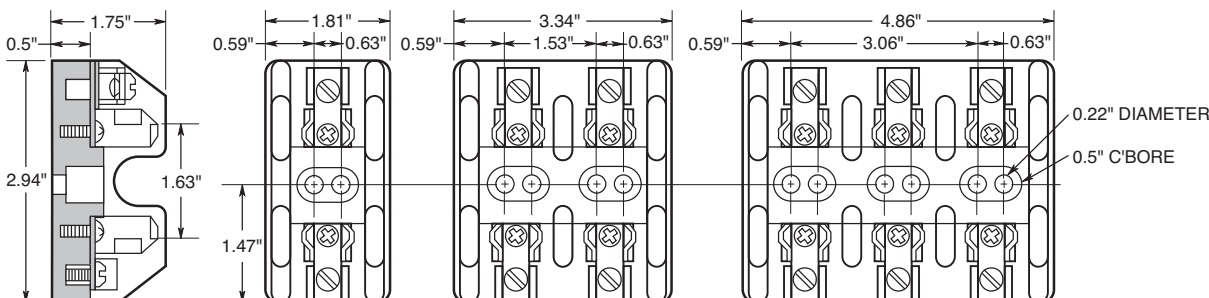
Dimensions - in**Figure 1. ½ to 30A****Figure 2. 31 to 60A**

Figure 3. 61 to 100A

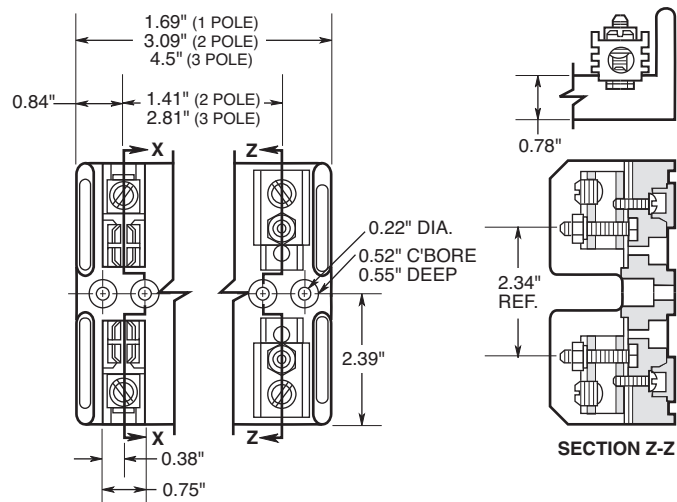


Figure 4. 101 to 200A (T60200-1C)

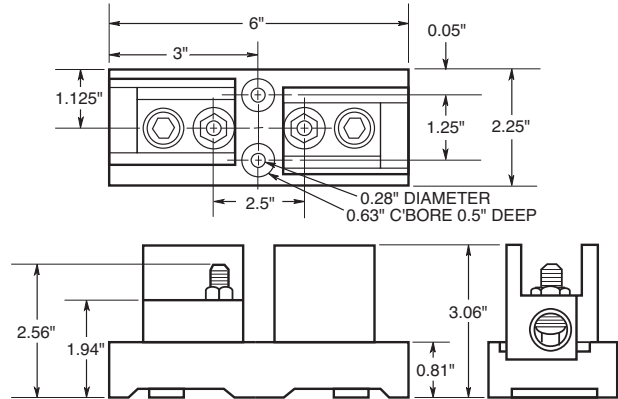


Figure 5. 101 to 200A (1B0089)

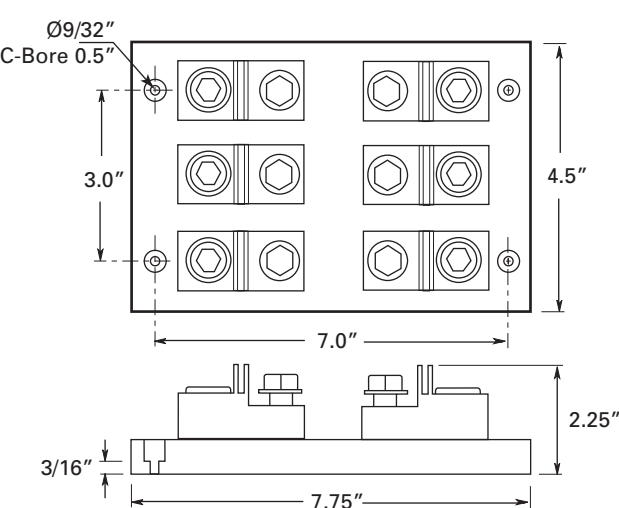


Figure 6. 201 to 400A

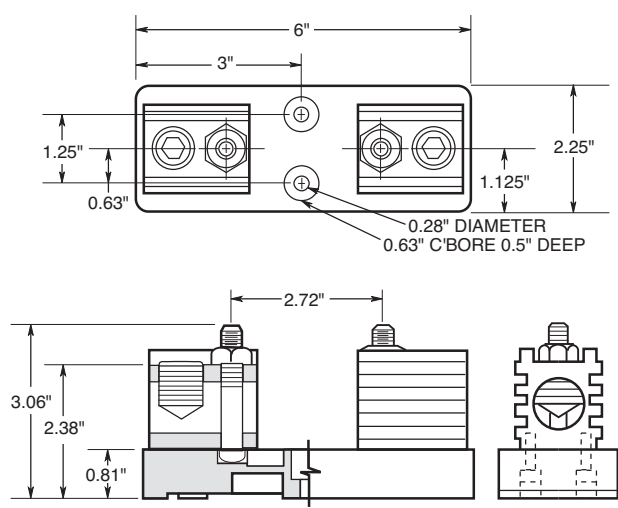


Figure 7. 401 to 600A

