

3743



Specifications

Description: Add-on fuse blocks for 13/32" X 1 1/2" (10.3 X 38.1mm) fuses. Single pole blocks lock into each other and can be added at any time. Each has a single end barrier.



Dimensions: See dimensions illustration.

Ratings:


Volts: — 600Vac/dc

Amps: — 30A

Agency information: CE, UL
Recognized Guide IZLT2, File E14853.




3742—End barrier only

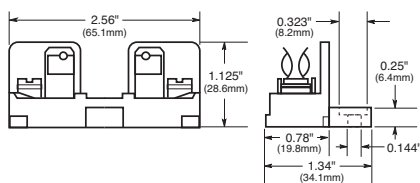

3723—Block and end barrier marking strip. Length is 9 3/8" (23.8cm).

Note: Mounting screw hole is 0.147" (3.7mm) dia. Counterbore, 0.636" (16.2mm) dia. Max. mounting screw no. 6.

3835



Specifications

Description: Multiple pole fuse blocks for 13/32" X 1 1/2" (10.3 X 38.1mm) fuses.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 250Vac/dc

Amps: — 30A


Agency information: CE

Catalog numbers

Catalog numbers	Poles	Base* width In (mm)
3835-1	1	2 7/16 (21.4)
3835-2	2	1 13/16 (46.0)
3835-3	3	2 5/8 (70.6)
3835-4	4	3 3/4 (95.2)
3835-5	5	4 2/8 (119.9)
3835-6	6	5 1/16 (144.5)
3835-7	7	6 21/32 (169.0)
3835-8	8	7 3/8 (193.7)
3835-9	9	8 1/8 (218.8)
3835-10	10	9 3/16 (242.9)
3835-12	12	11 1/2 (292.1)


*Base length: 2 3/4" (69.9mm)

Dimensions - in (mm)

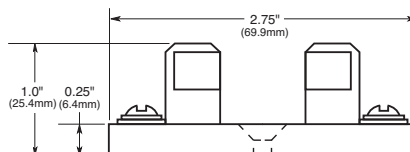

Note: Mounting screw hole diameter is 0.148" (3.7mm). Countersink, 0.313" (7.9mm). Max. mounting screw no. 6.

4421 and 4515

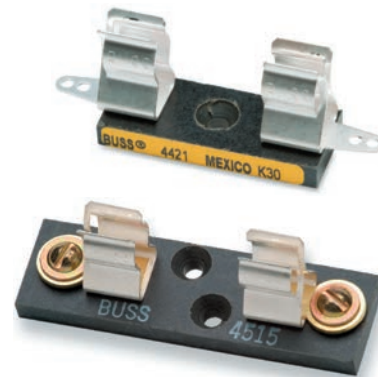

Specifications

Description: Single pole fuse blocks for 13/32" X 1 1/2" (10.3 X 38.1mm) fuses.


Dimensions: See dimensions illustration.

Ratings:


Volts: — 250Vac/dc (or less)

Amps: — 30A

Agency information: CE

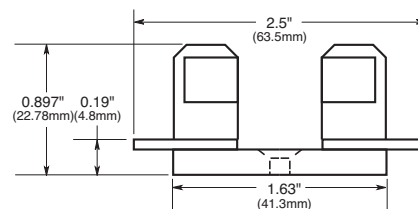

4421—Solder terminals Base width 5/8" (15.9mm)

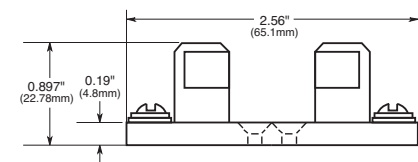

4515—Screw terminals Base width 3/4" (19mm)

Note: Mounting screw hole diameter is 0.147" (3.7mm). Countersink, 0.312" (7.9mm). Max. mounting screw no. 6.