

Panelboard trim locks

Note: Dimensions in inches (mm).


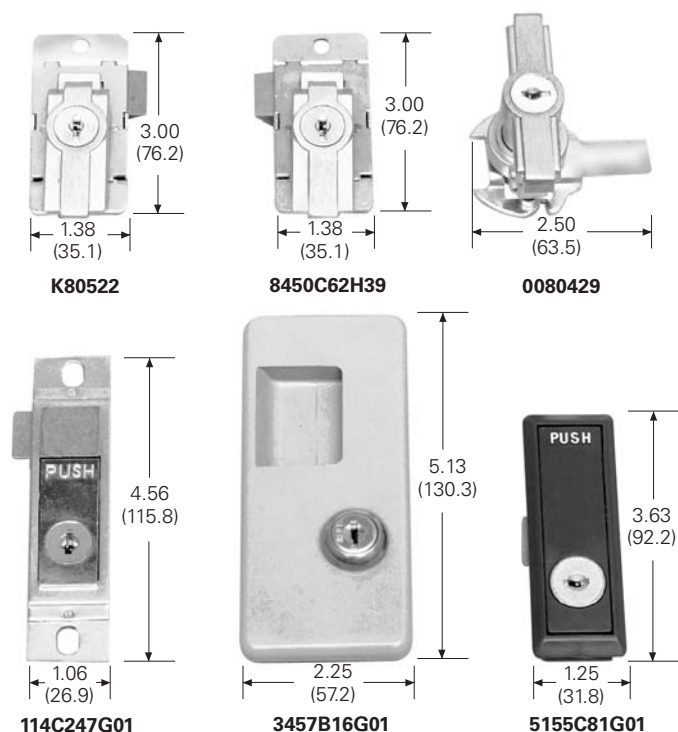


Table 22. Panelboard Trim Locks

Description	Catalog/Style Number
For use on left-handed door (hinged on the left side)	K80522
For use on right-handed door (hinged on the right side)	8450C62H39
T handle lock—At one time used on all panels over 48.00 inches (1219.2 mm) in height; also used on outdoor (N3R) panels	0080429
Used on lighting and small power panels as standard; replacement lock uses WEM-3 key	114C247G01
Used on lighting and small panels as standard	3457B16G01
This is the present-day lock used on standard PRL1, 2, and 3; WEM 2 key	5155C81G01

Contact the Sumter Plant Aftermarket Center at 803-481-6677 for prices and details.

Replacement panelboard trim clamps

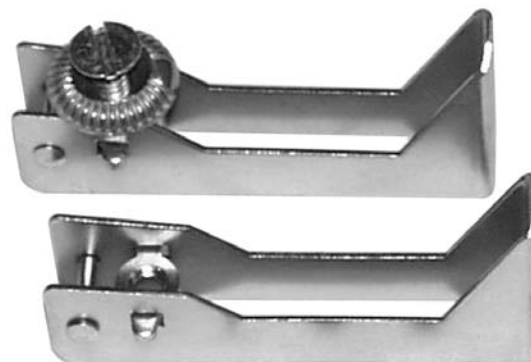

7494A11G02

These trim clamps are used to mount Fastrims. This type of trim used to be supplied as standard on all panels, and is still available today when concealed trim-mounting hardware is specified. They come in bags of six. Please note that some larger panels may require more than one bag.

- Overall length of 3.13 inches (79.5 mm)
- Used on B10B and PRL1, 2, 3



414A380G02

- Overall length of 2.50 inches (63.5 mm)
- Used on CDP, FDP, and NQB