

DuroSite® LED Linear - Top Conduit

for Industrial applications



Ratings and Certifications	
• UL 1598/A	• CSA 22 #250
• UL 8750	• 5yr full performance warranty
• IP66	• L70 rated for >100,000 hours
• NEMA 4X	

*All features not available on every model. Please refer to product part number pages for model specifics.


Mechanical information	
Fixture weight:	
4' linear:	11 lbs (4.99 kg)
2' linear:	10 lbs (4.53 kg)
Shipping weight:	
4' linear:	13 lbs (5.90 kg)
2' linear:	12 lbs (5.44 kg)
Mounting:	(3) 3/4" NPT openings
	Optional swivel bracket - LTXW4
	Optional low profile bracket - LTXW4LP

Specifications			
Voltage options:	100 - 277V AC	Housing:	Copper free aluminum
Operating temp:	-40°F to +149°F (-40°C to +65°C)	Lens:	Polycarbonate
Power factor:	>0.9	CRI:	75 / 80
THD:	<20%	CCT:	5000K (cool white)
Surge protection:	4 kV line to line, 4 kV line to ground		4000K (neutral white)


Comparison		
	Warranty	L70
Dialight Linear	5yr	>150,000
Metal Halide	1	6,000
High Pressure Sodium	1	20,000
Fluorescent	1	24,000

Lumens	Wattage	lm/W	Mounting Heights
7,250	66	110	20'
6,900	66	105	↕
3,500	33	106	↕
3,300	33	100	10'

Dimensions

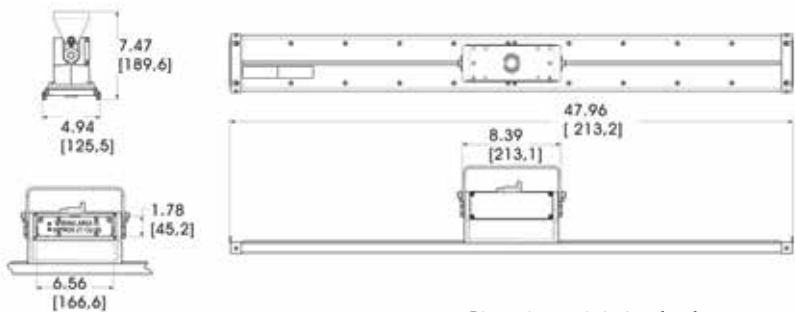

Dimension are in Inches [mm]

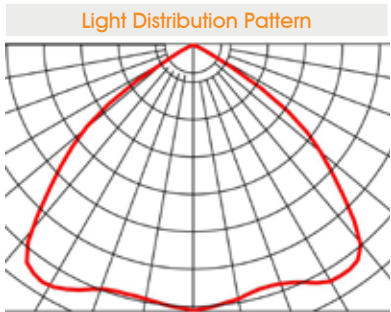

Circular Pattern

DuroSite® LED Linear - Top Conduit

Ordering Information and Mounting Accessories

Part Number	Length	CRI	Fixture Lumen	Watt	LPW	Warranty	Voltage	CCT	Lens	Light Distribution Pattern
LTM3C4M2P	4'	75	7,250	66	110	5yr	100 - 277 V AC	5000K (cool white)	Clear Polycarbonate	Circular
LTM3C4H2W	4'	75	6,700	66	102	5yr	100 - 277 V AC	5000K (cool white)	Diffused polycarbonate	Circular
LTM3B4M2P	4'	80	6,500	66	98	5yr	100 - 277 V AC	5000K (cool white)	Clear Polycarbonate	Circular
LTM3B4H2W	4'	80	6,000	66	91	5yr	100 - 277 V AC	5000K (cool white)	Diffused polycarbonate	Circular
LTM3C4D2P	2'	75	3,600	33	109	5yr	100 - 277 V AC	5000K (cool white)	Clear Polycarbonate	Circular
LTM3C4B2W	2'	75	3,300	33	100	5yr	100 - 277 V AC	5000K (cool white)	Diffused polycarbonate	Circular
LTM3B4D2P	2'	80	3,200	33	97	5yr	100 - 277 V AC	5000K (cool white)	Clear Polycarbonate	Circular
LTM3B4B2W	2'	80	2,900	33	88	5yr	100 - 277 V AC	5000K (cool white)	Diffused polycarbonate	Circular

All values typical unless otherwise stated, Lumen values are typical (tolerance +/- 10%).

Part numbers listed in the table above are cool white. For neutral white model, replace the 5th character with **N**. Ex. LTM3C4D2P becomes LTM3N4D2P



LTXW4

- Mounting bracket
- Can be angled at 0°, 30°, 45°, 60° & 90°



LTXW4LP

- Low profile mounting bracket
- Can be angled at 0° and 15°



LTXENDCAPKIT

- Chain mount and secondary retention bracket



LTXSAFEKIT

- Safety Cable Kit for secondary retention



LTXLSXW4

- Retrofit bracket adapter used to connect LTM model fixtures to an existing LSXW4 bracket