



- NOTES:
- 1) FINISH: GRAY
 - 2) CABINET: 16 GA GALV. STEEL
 - 3) 200 AMP CONTINUOUS, 600 VAC, 1 PHASE, 3 WIRE
 - 4) SAFETY LABEL IS LOCATED ON THE LOWER RIGHT-HAND CORNER OF THE FRONT
 - 5) EATON LABEL ATTACHED TO THE END OF THE CARTON
 - 6) PALLETIZE 84 CARTONS PER PALLET. PALLET & CARTONS ARE NOT TO EXCEED 42" HIGH.
 - 7) EATON LOGO STAMPED IN THE LOWER LEFT-HAND CORNER OF FRONT.
 - 8) TEMPORARY CARDBOARD METER OPENING COVER PROVIDED.

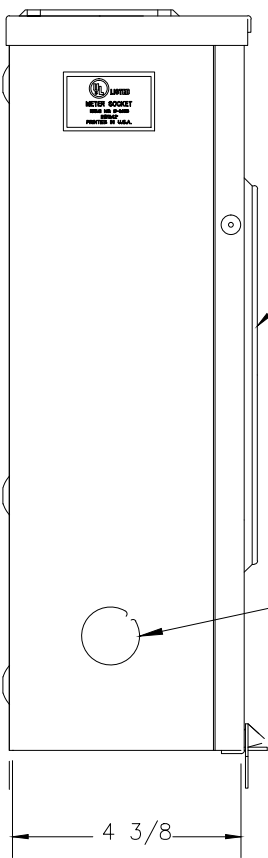

RINGLESS FRONT COVER

3/4 KO
(2) PLACES

4 3/8

3-5/16" HUB OPENING
MOUNTING EMBOSS
W/ 5/16 DIA KO
(6) PLACES


5/32 ARC SUPPRESSOR SEATS

#8-250MCM CU7AL
LINE, LOAD, & NEUTRAL

METER GUIDES MUST BE
POSITIONED TO OUTSIDE,
AS SHOWN

14

8

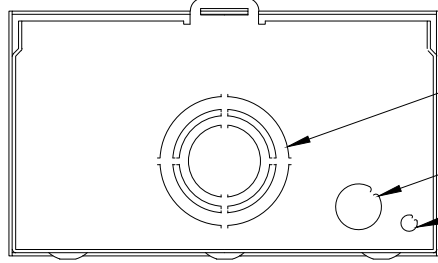

2, 1-1/2, 1-1/4, 1 KO

1/2 KO

5/16 DIA KO

TITLE / DESCRIPTION		DECO ZS-200		SKT 200A 1P HO		DRAFTER/DESIGNER		DATE (YYYY/MM/DD)	
						RLK		2013/12/17	
THE INFORMATION ON THIS DRAWING IS DISCLOSED IN CONFIDENCE AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED, EXCEPT FOR THE PURPOSE WHICH FURNISHED.		 Powering Business Worldwide © 2006 Eaton Corporation, All Rights Reserved		SIZE	DRAWING	1004709D-CH		REVISION	004
				B	NUMBER				
				UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES				SCALE	SHEET
						N/A			1 OF 1

DSD_BFM_ACAD_WEB.DWG