
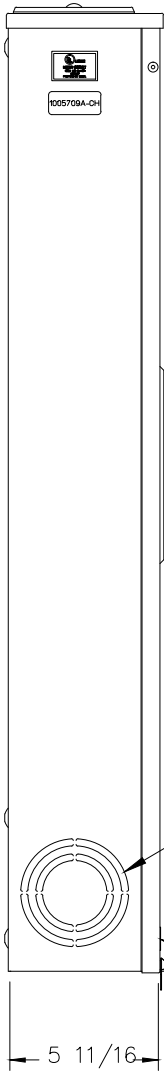


- NOTES:
- 1) FINISH: GRAY
 - 2) CABINET: BACK IS FABRICATED FROM 14GA. GALVANIZED STEEL, TOP, BOTTOM AND FRONT FABRICATED FROM 16GA. GALVANIZED STEEL.
 - 3) 320AMP CONTINUOUS
600 VAC, 1 PHASE, 3-WIRE
320AMP BYPASS
 - 4) PROVISIONS FOR BROOKS OR INNER-TITE STANDARD LENGTH BARREL LOCK IN CONJUNCTION WITH BROOKS LOCK GUARD #865 OR #86505, WITH A PERMANENTLY WELDED BRACKET.
 - 5) EATON LABEL ATTACHED TO THE END OF THE CARTON.
 - 6) EATON LOGO STAMPED IN THE LOWER LEFT-HAND CORNER OF FRONT.
 - 7) INHIBITOR APPLIED IN CONNECTORS.
 - 8) SUPPLIED WITH TEMPORARY CARDBOARD METER OPENING COVER.
 - 9) PALLETIZE (10) UNITS PER PALLET. PALLET & CARTONS ARE NOT TO EXCEED 42" HIGH.




#4-600MCM CU7AL
LINE, LOAD AND NEUTRAL
ANTI ROTATION BRACKET

3-1/2, 3, 2-1/2, 2 KO
(6) PLACES

7/8 DIA KO FOR
BARREL LOCK

5 11/16

5X5 HUB COVER PLATE

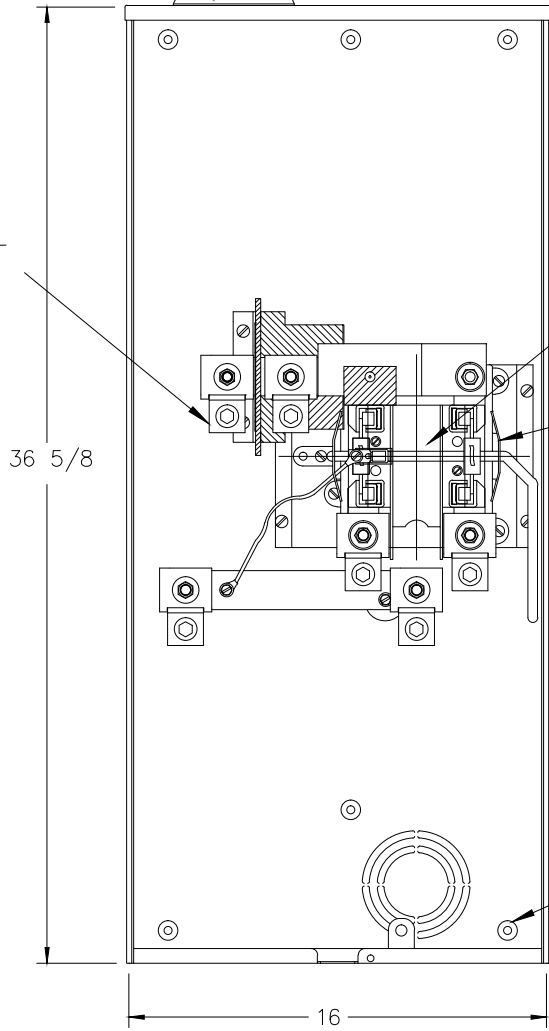


SHIELD

4 TERMINAL
LEVER OPERATED
BYPASS & CLAMPING
JAW SOCKET

MOUNTING EMBOSS
W/5/16 DIA. KO
(6) PLACES

36 5/8

16

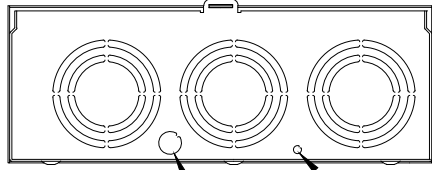

1/2 KO

5/16 DIA KO

TITLE / DESCRIPTION		SKT 320A 1P OH/UG HCP		DRAFTER/DESIGNER RLK		DATE (YYYY/MM/DD) 2013/12/30	
THE INFORMATION ON THIS DRAWING IS DISCLOSED IN CONFIDENCE AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED, EXCEPT FOR THE PURPOSE WHICH FURNISHED.		 Powering Business Worldwide © 2003 Eaton Corporation, All Rights Reserved		SIZE B	DRAWING NUMBER 1005709A-CH	REVISION 005	SHEET 1 of 1
				UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES		SCALE N/A	