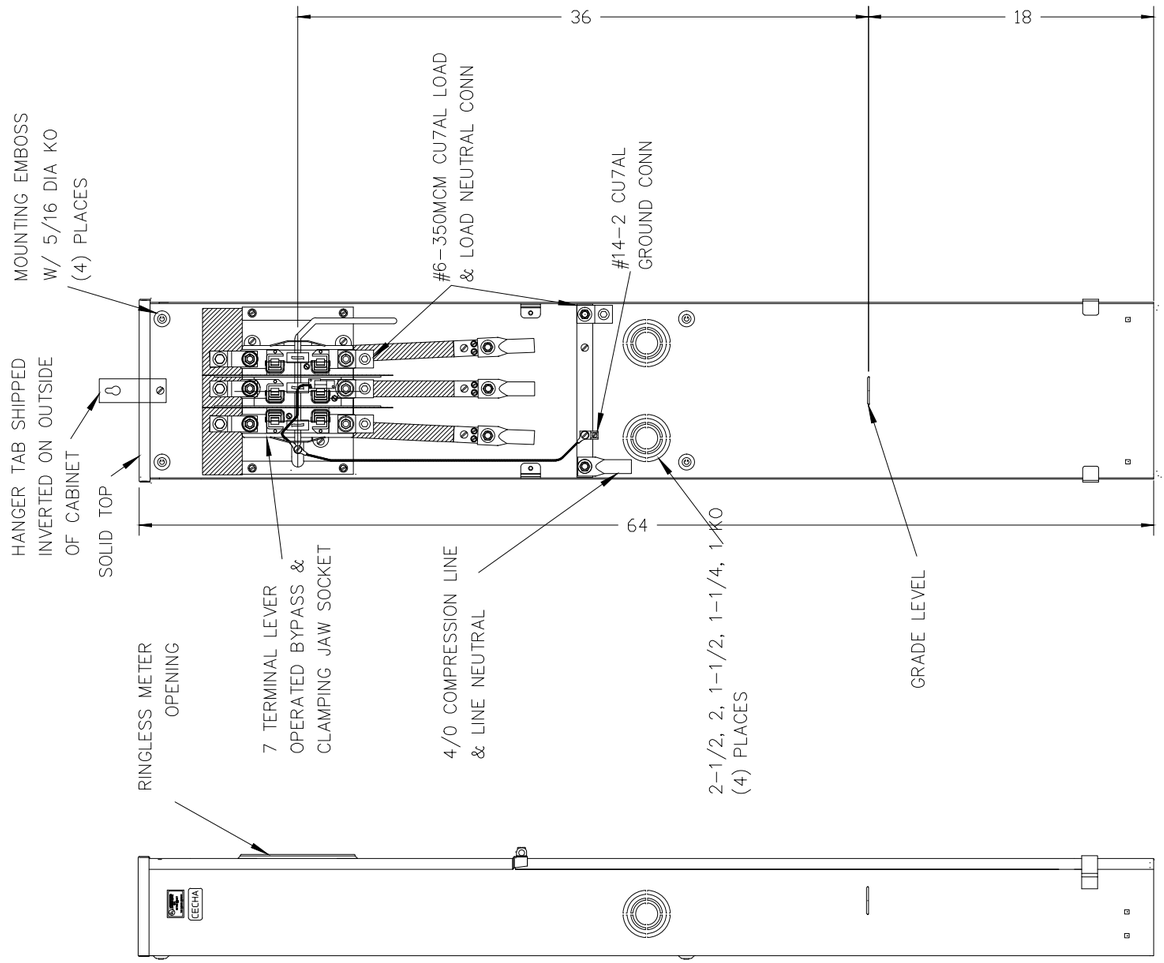



VIEW FROM BOTTOM WITH
INTERNAL COMPONENTS REMOVED

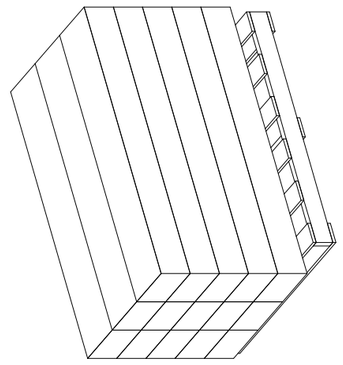

NOTES:
1) PEDESTAL AND PEDESTAL BOTTOM FRONT CONSTRUCTED FROM 14GA. G-90, GALVANIZED STEEL.
2) PEDESTAL TOP AND PEDESTAL TOP FRONT CONSTRUCTED FROM 16GA. G-90, GALVANIZED STEEL.
3) ELECTRICAL RATING: 200 AMP CONTINUOUS, 600 VAC, 3 PHASE, 4 WIRE
4) PAINT: GRAY
5) EATON LABEL ATTACHED TO END OF CARTON.
6) PALLETIZE 15 UNITS PER PALLET. PALLET & CARTONS MUST NOT EXCEED 42" HIGH.
7) EATON LOGO STAMPED IN CORNER OF FRONT.
8) TEMPORARY CARDBOARD METER OPENING COVER PROVIDED.

TITLE / DESCRIPTION: MTR PED 200A 3P 7T		DRAFTER/DESIGNER: RLK	DATE (YYYY/MM/DD): 2013/12/26
THE INFORMATION ON THIS DRAWING IS DISCLOSED IN CONFIDENCE AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED, EXCEPT FOR THE PURPOSE WHICH FURNISHED.	Powering Business Worldwide © 2008 Eaton Corporation, All Rights Reserved	SIZE: B; DRAWING NUMBER: 1009845-CH	REVISION: 002
		UNLESS OTHERWISE SPECIFIED DIMENSIONS IN: INCHES	SCALE: N/A; SHEET: 1 OF 1
			DSD_BFM_ACAD_WEB.DWG