

Beacons

Steady-On Halogen or Incandescent

48 Series

Accessories	
Description	Cat. No.
Gasket Kit suitable for outdoor surface installation – AC models	GSK-KIT
Corner Mount Bracket	CBR
Wall Mount Bracket	WBR



GSK-KIT
Gasket Kit



CBR
Corner Mount Bracket



WBR
Wall Mount Bracket

Signal Input Load Characteristics

These devices may be operated by PLCs with output characteristics that match the input load requirements of the signal.


Cat. No.	Operating Voltage	Max. Off State Leakage Current (A)	Continuous On Current (A)	Surge (Inrush/Duration)
48SIN*-N5-25WH	120V AC 50/60 Hz	0.025	0.200	0.8 A / 8 mSeconds
48SIN*-G1-20WH	24V DC	0.025	0.800	0.9 A / 1 mSecond

*Letter in this position designates lens color: A - amber, B - blue, C - clear, G - green, M - magenta or R - red

Weights and Dimensions

Cat. No.	Approx. Net Weight (lb.)	Approx. Shipping Weight (lb.)
48SIN*-G5-20WH	0.63	0.79
48SIN*-N5-25WH	0.63	0.79
48SIN*-G1-20WH	0.63	0.79
48SIN*-E1	0.63	0.79
GSK-KIT	0.70	1.00
CBR	4.00	4.20
WBR	2.30	2.50

*Letter in this position designates lens color: A - amber, B - blue, C - clear, G - green, M - magenta or R - red

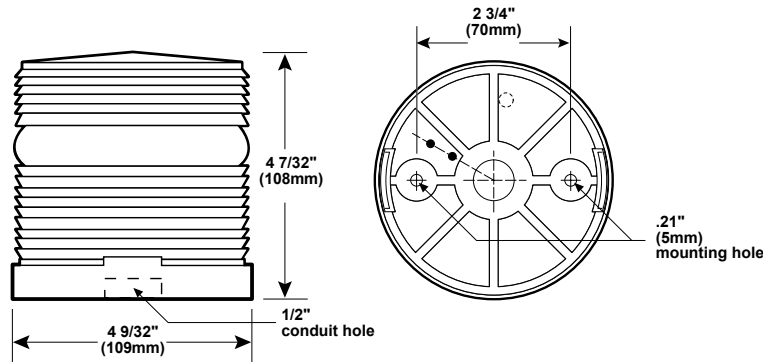

Use Cat. No. GSK-KIT gasket kit suitable for outdoor surface mount installation on AC units