


nVent CADDY Rod Lock Beam Clamp, Thick Flange – CRLB50EG



- Prefabricated assemblies easily lift and lock into place, helping to save time and money
- Easy "push-to-install" design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Lock nut can be finger tightened, locking the rod in place
- Works with slightly damaged threads and minor burrs on the threaded rod
- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI®/MSS-SP-58 (Type 19 and 23)

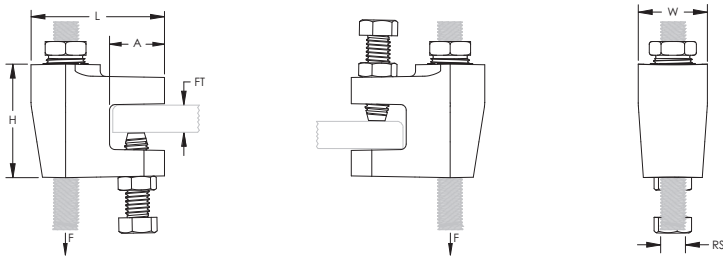

Part Number	CRLB50EG
Material	Cast Iron
Finish	Electrogalvanized
Rod Size (RS)	1/2"
Flange Thickness (FT)	3/8" – 3/4"
Height (H)	2.1"
Length (L)	2.4"
Width (W)	1.3"
A	1"
Static Load (F)	1,100 lb
Certifications	cULus
Standard Packaging Quantity	25 pc
UPC	78285679392

For use on plain and electro zinc plated hardware only.

FM® Approved in the bottom mount orientation only.

Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the I-beam and then an additional 1/2 turn added.