

SAFETY FEATURES

Eliminates the potentially dangerous activity of deburring threaded rods

Bigger than traditional hex nuts making it easier to handle even while wearing bulky gloves, and therefore reducing the likelihood of dropped parts

Threaded halves interlock to function as a single hex nut with attached large diameter washer

The color of the line corresponds to the larger goal of each feature:

SAFETY FEATURES

FASTER INSTALLATION FEATURES

STRENGTH FEATURES


FASTER INSTALLATION FEATURES

Ready to use out of the box, innovative hex nut and large diameter washer combined, eliminates multiple pieces of standard hardware

STRENGTH FEATURES

1/4" [6.5mm] Thick large diameter washer wide enough to work with standard strut channel profiles

Available in 3/8" and 1/2" [M8 and M10] sizes to provide the required strength to support the load

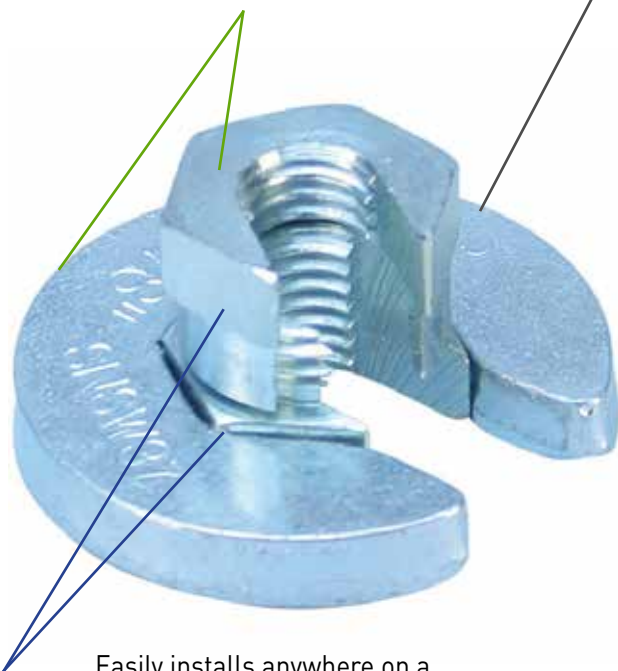

Easily installs anywhere on a pre-hung threaded rod in seconds, even above existing installations

Safety factor of 3:1 on static loads

Eliminate the need to remove structural coating on long lengths of threaded rod thanks to its quarter-turn installation

Ideal for retrofit projects, such as trapeze installations, where disassembly of the support system is not desired

Compatible with standard wrench sizes for final tightening

