



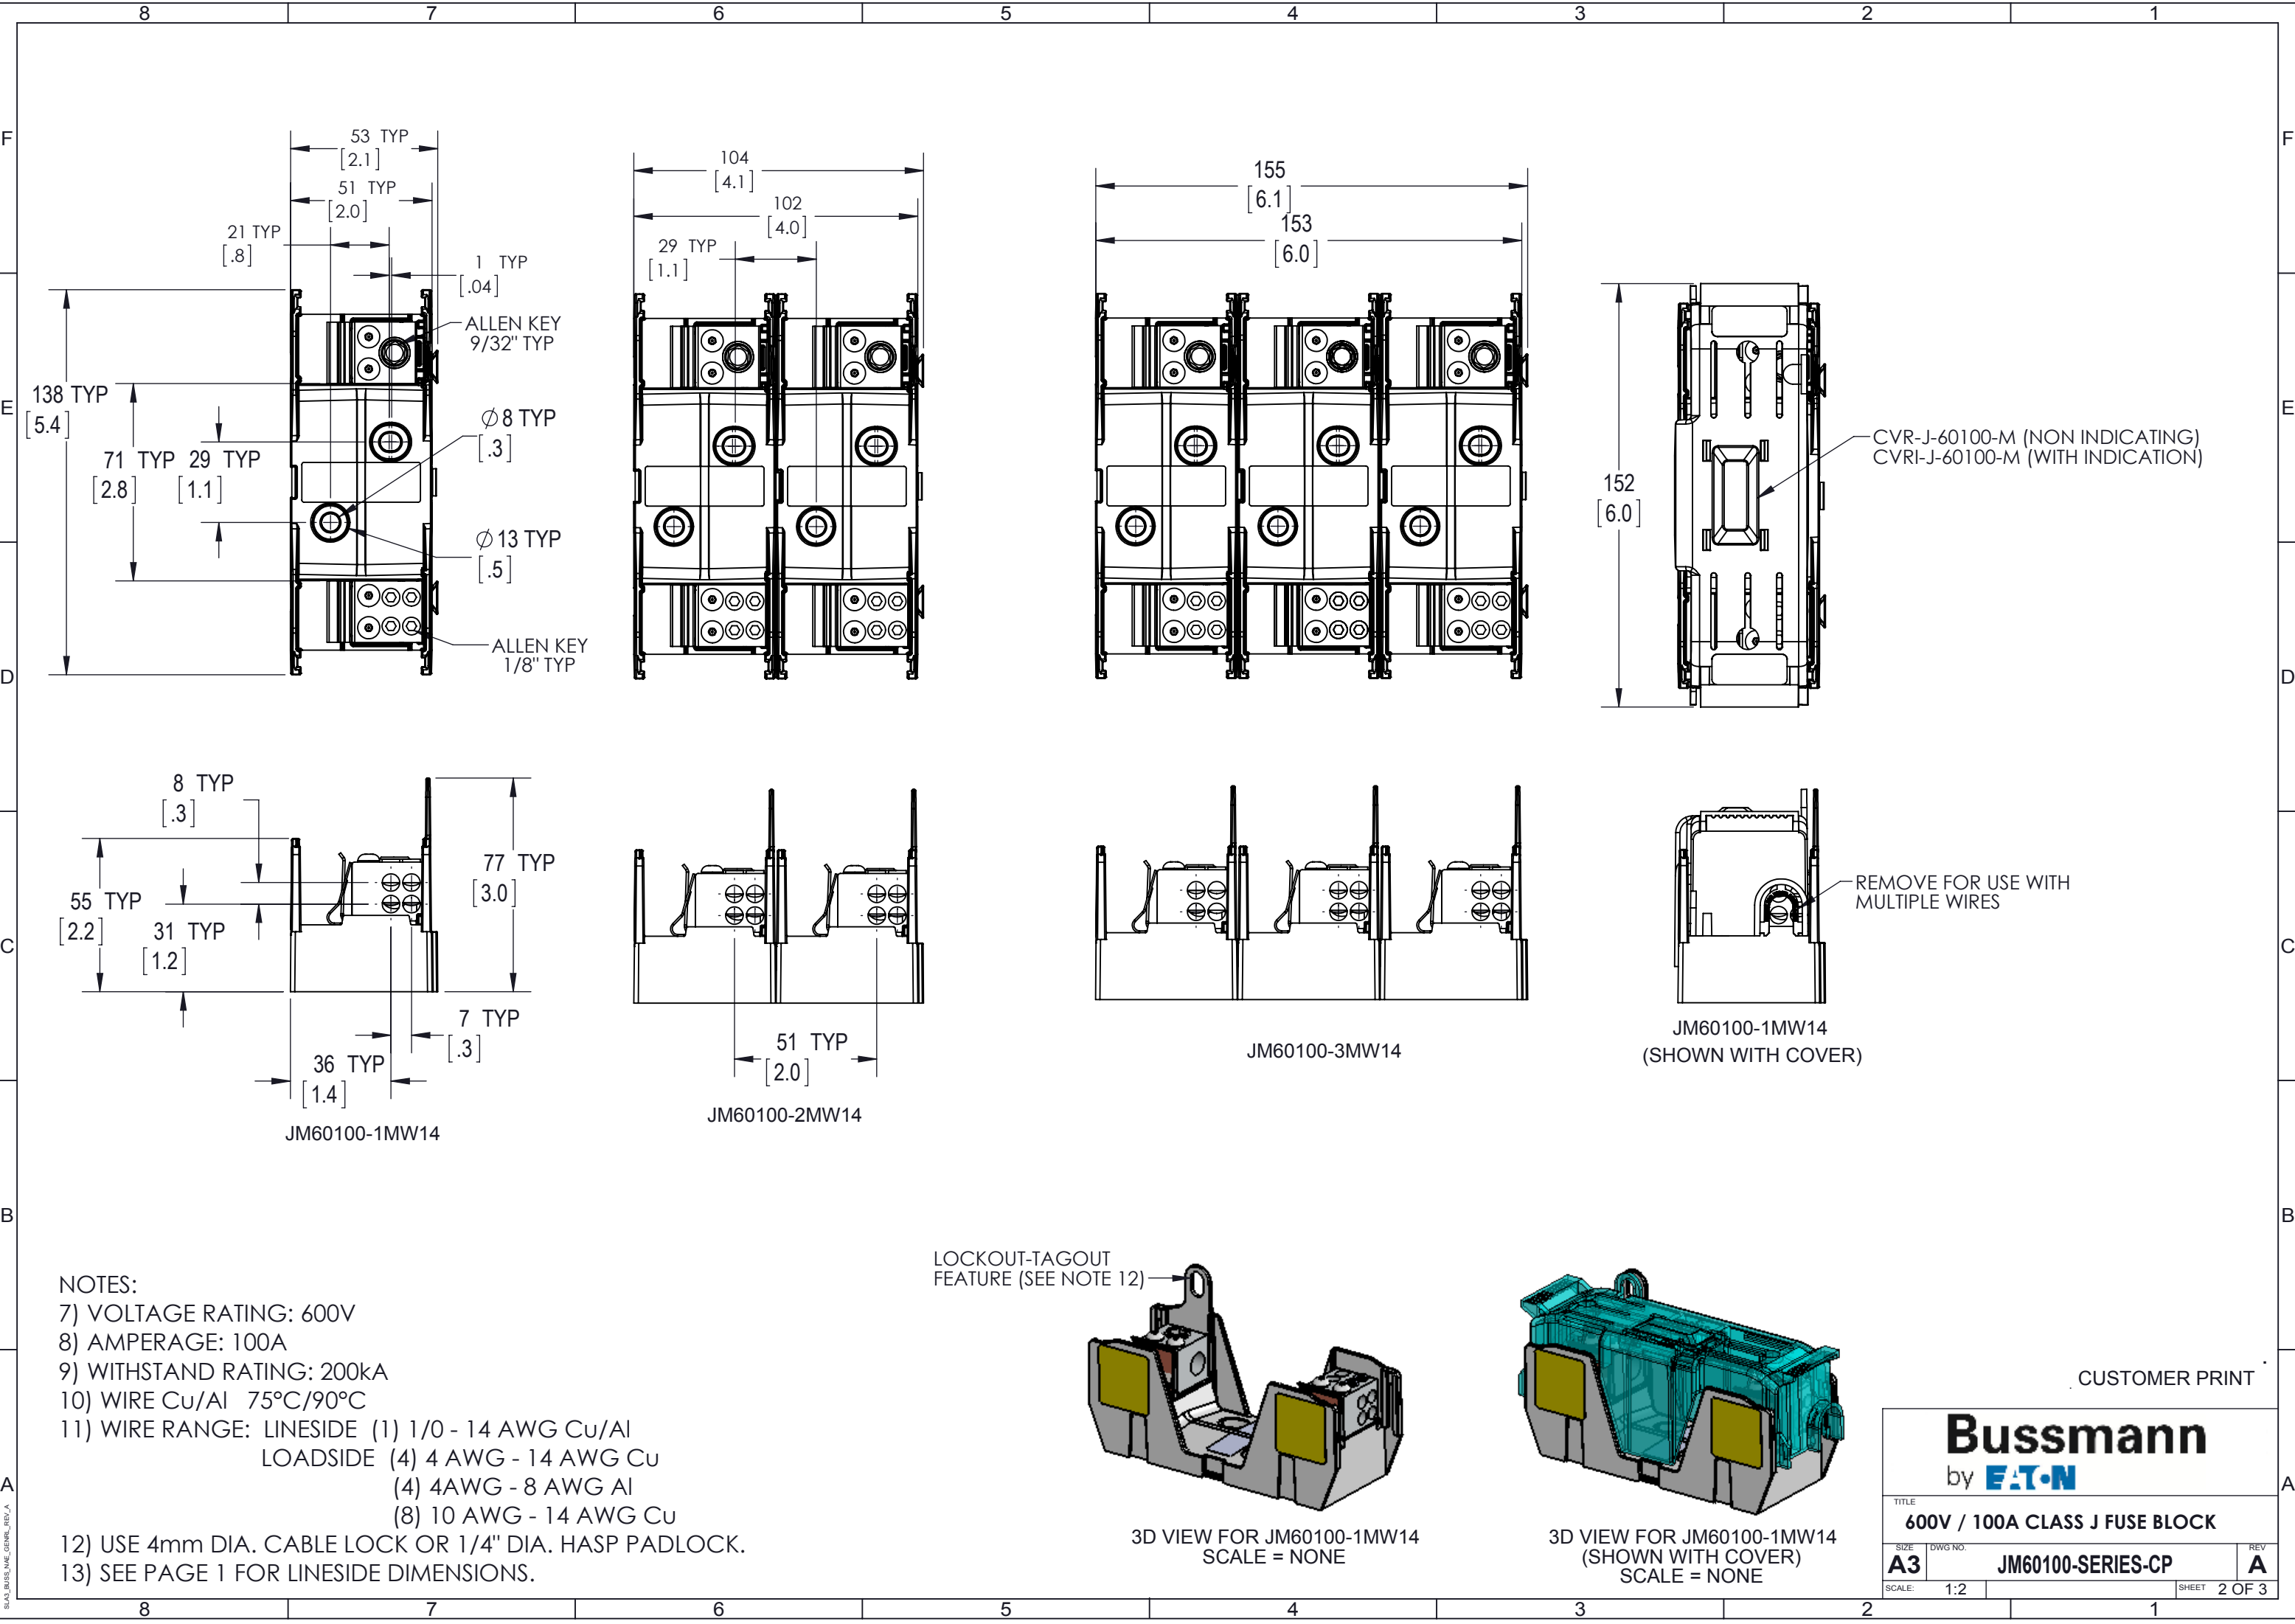


NOTES:
7) VOLTAGE RATING: 600V
8) AMPERAGE: 100A
9) WITHSTAND RATING: 200kA
10) WIRE Cu/Al 75°C/90°C
11) WIRE RANGE: LINESIDE (1) 1/0 - 14 AWG Cu/Al
LOADSIDE (4) 4 AWG - 14 AWG Cu
(4) 4 AWG - 8 AWG Al
(8) 10 AWG - 14 AWG Cu
12) USE 4mm DIA. CABLE LOCK OR 1/4" DIA. HASP PADLOCK.
13) SEE PAGE 1 FOR LINESIDE DIMENSIONS.

LOCKOUT-TAGOUT
FEATURE (SEE NOTE 12)

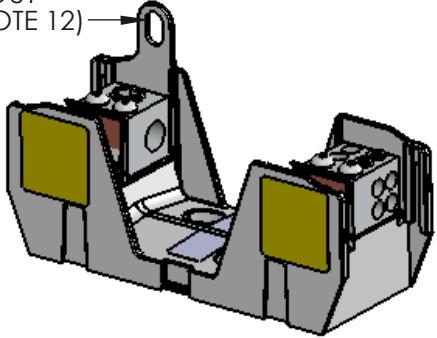

3D VIEW FOR JM60100-1MW14
SCALE = NONE

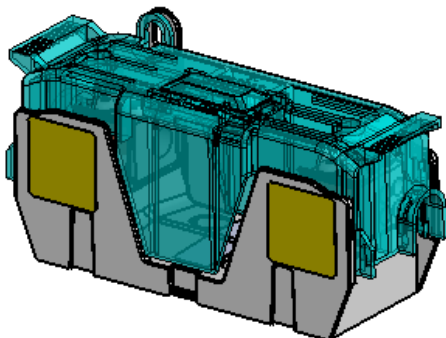

3D VIEW FOR JM60100-1MW14
(SHOWN WITH COVER)
SCALE = NONE

CUSTOMER PRINT

Bussmann by E.T.N.		
TITLE 600V / 100A CLASS J FUSE BLOCK		
SIZE A3	DWG NO. JM60100-SERIES-CP	REV A
SCALE: 1:2	SHEET 2 OF 3	