

ECGJH and ECLK couplings

1/2" to 2" – brass construction

2 1/2" to 4" – stainless steel construction only

Cl. I, Groups A, B, C, D
Cl. II, Groups E, F, G
Cl. III

Explosionproof
Dust-ignitionproof
Wet Locations

4F
4F




ECLK (ECGJH provided with UNF female union – male connection at one end, female connection at one end)


Ordering information (continued):

Flexible length (in.)	Hub size	Cat. #	Flexible length (in.)	Hub size	Cat. #	Flexible length (in.)	Hub size	Cat. #
4	1/2"	ECLK14	18	1"	ECLK318	27	2 1/2"	ECLK727
4	3/4"	ECLK24	18	1 1/4"	ECLK418	27	3"	ECLK827
6	1/2"	ECLK16	18	1 1/2"	ECLK518	27	4"	ECLK1027
6	3/4"	ECLK26	18	2"	ECLK618	30	1/2"	ECLK130
6	1"	ECLK36	18	2 1/2"	ECLK718	30	3/4"	ECLK230
8	1/2"	ECLK18	18	3"	ECLK818	30	1"	ECLK330
8	3/4"	ECLK28	18	4"	ECLK1018	30	1 1/4"	ECLK430
8	1"	ECLK38	21	1/2"	ECLK121	30	1 1/2"	ECLK530
10	1/2"	ECLK110	21	3/4"	ECLK221	30	2"	ECLK630
10	3/4"	ECLK210	21	1"	ECLK321	30	2 1/2"	ECLK730
10	1"	ECLK310	21	1 1/4"	ECLK421	30	3"	ECLK830
12	1/2"	ECLK112	21	1 1/2"	ECLK521	30	4"	ECLK1030
12	3/4"	ECLK212	21	2"	ECLK621	33	1/2"	ECLK133
12	1"	ECLK312	21	2 1/2"	ECLK721	33	3/4"	ECLK233
12	1 1/4"	ECLK412	21	3"	ECLK821	33	1"	ECLK333
12	1 1/2"	ECLK512	21	4"	ECLK1021	33	1 1/4"	ECLK433
12	2"	ECLK612	24	1/2"	ECLK124	33	1 1/2"	ECLK533
12	2 1/2"	ECLK712	24	3/4"	ECLK224	33	2"	ECLK633
12	3"	ECLK812	24	1"	ECLK324	33	2 1/2"	ECLK733
12	4"	ECLK1012	24	1 1/4"	ECLK424	33	3"	ECLK833
15	1/2"	ECLK115	24	1 1/2"	ECLK524	33	4"	ECLK1033
15	3/4"	ECLK215	24	2"	ECLK624	36	1/2"	ECLK136
15	1"	ECLK315	24	2 1/2"	ECLK724	36	3/4"	ECLK236
15	1 1/4"	ECLK415	24	3"	ECLK824	36	1"	ECLK336
15	1 1/2"	ECLK515	24	4"	ECLK1024	36	1 1/4"	ECLK436
15	2"	ECLK615	27	1/2"	ECLK127	36	1 1/2"	ECLK536
15	2 1/2"	ECLK715	27	3/4"	ECLK227	36	2"	ECLK636
15	3"	ECLK815	27	1"	ECLK327	36	2 1/2"	ECLK736
15	4"	ECLK1015	27	1 1/4"	ECLK427	36	3"	ECLK836
18	1/2"	ECLK118	27	1 1/2"	ECLK527	36	4"	ECLK1036
18	3/4"	ECLK218	27	2"	ECLK627			

Dimensions (in inches):

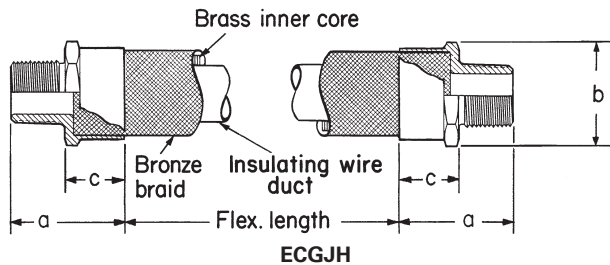

ECGJH

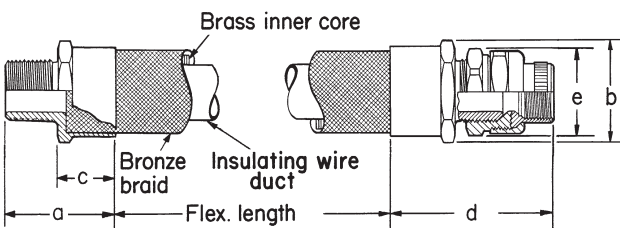

ECLK

Hub size	a	b	c	d	e
1/2"	1 7/8	1 1/2	1 7/8	3	1 5/16
3/4"	2 1/16	1 7/8	1 3/16	3 3/4	1 13/16
1"	2 1/2	2 1/8	1 1/2	3 5/8	1 7/8
1 1/4"	2 7/8	2 15/16	1 7/8	4 3/16	2 5/4
1 1/2"	3 5/16	3 1/2	1 7/8	5 1/16	3 1/16
2"	3 3/4	4 1/4	2	5 1/16	3 9/16
2 1/2"	3	4 7/16	1 5/8	5 1/16	4 5/16
3"	3 3/8	4 7/16	1 3/4	5 5/8	5 1/16
4"	4 5/8	4 15/16	3 1/4	7 1/2	6 1/16

Minimum recommended bend radius

Hub size	Radius
1/2"	10
3/4"	12
1"	14
1 1/4"	14
1 1/2"	16
2"	16
2 1/2"	16
3"	18
4"	30