

Applications:

- Myers™ hubs are used in the termination of electrical circuits through wall of the enclosure
- Designed for use indoors or outdoors with rigid conduit and IMC
- Ideal for pharmaceutical, chemical and food processing, pulp/paper, nuclear, solar and commercial construction applications
- Resistant to a variety of chemicals, including acetic, citric and salt water
- Special design of o-ring gasket provides excellent environmental ratings and chemical resistance
- Hub is provided with a stainless steel ground nut

Features:

- Wide range of styles, trade sizes and materials to meet customer requirements and preferences
- Multiple certifications provide users peace of mind
- Easy installation and smooth pulling service for labor savings
- Tapered female threads for rigid/IMC conduit, NPSM male threads

Certifications and compliances:

- NEC/CEC:
 - Class I, Division 2
 - Class II, Divisions 1 & 2
 - Class III, Divisions 1 & 2
 - Class I, Zone 1, AEx e II
 - Class I, Zone 1, Ex e II
- UL Listed – UL Standard 514B
- CSA certified – certified by UL to CSA Standard C22.2 No. 18
- NEMA Type 2, 3, 3R, 4, 4X, 12 (std. hub and ground hub)
- IEC:
 - ATEX Certified to EN60079-0:2009, EN60079-7:2007 and EN60079-14 Standards
 - ATEX Certified ITS12ATEX47591X  II 2G Ex e IIC Gb Ta (stainless steel -55°C to 180°C) (zinc -15°C to 120°C)
 - IECEX Certified IECEX ETL 12.0009X to IEC 60079-0:2007-10, Edition 5 and IEC 60079-7:2006-07, Edition 4 IECEX-Ex e II Gb Ta (stainless steel -55°C to 180°C) (zinc -15°C to 120°C)
 - IP66



Standard materials:

- Nut: Zinc (Zamek-2, Zamek-3), Aluminum (Al 360), stainless (316)
- Body: Zinc (Zamek-2, Zamek-3), aluminum (Al 360), stainless (316)
- Insuliner: Lexan
- O-Ring: Viton; Silicone (ATEX version only)
- Ground Screw: Steel/stainless steel


Standard finishes:

- Aluminum – natural
- Zinc – natural
- Stainless – natural

Options:

- | Description | Suffix |
|--|---------|
| • Nickel-chrome plate finish (available on zinc hubs only) |CP |

Myers hubs design features

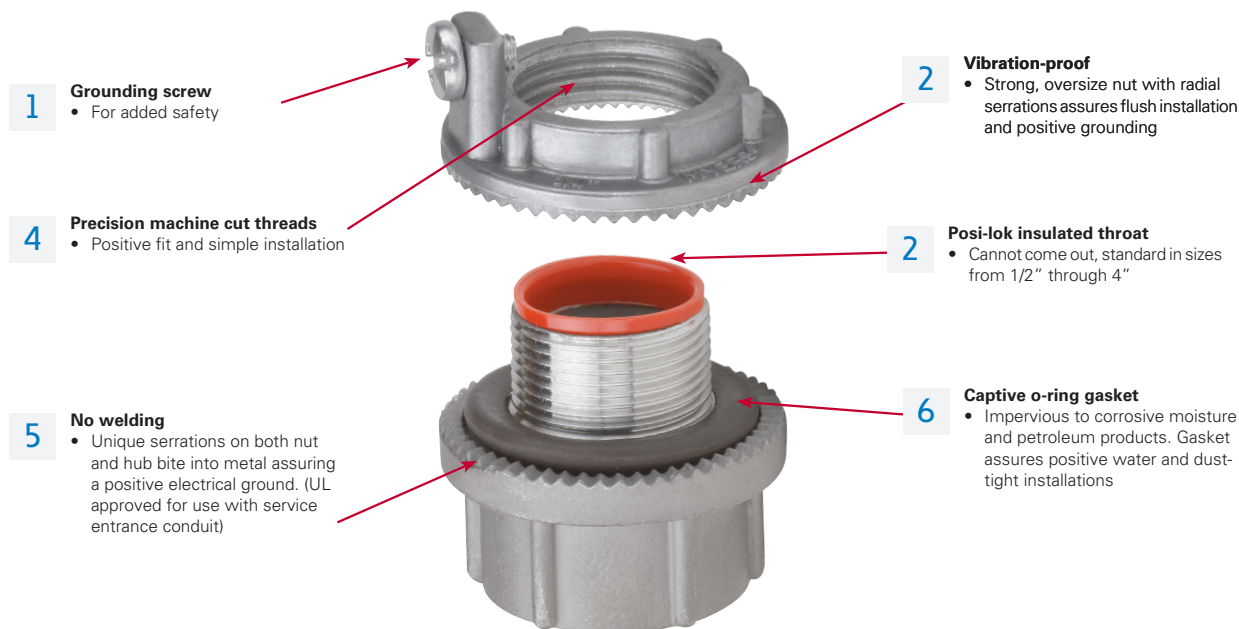

Available in trade sizes 3/8" through 6"

Hub Basic Scru-Tite®

Hubs are ideal for general use with rigid conduit. Provides positive seal and electrical ground.



Available in trade sizes 1/2" through 6"

Ground hub

Combines all of the features of the Hub Basic Scru-Tite® plus the additional feature of the grounding screw on the locknut.




Available in trade sizes 1/2" through 4"

ATEX rated hub

Hub is listed for use in hazardous (classified) locations to IECEx-ATEX certifications. Ideal for global requirements and OEM's shipping material worldwide.

Stainless steel now rated for -55°C to 180°C



Through-bulkhead fitting

Hubs are the perfect method for installing hubs on cast boxes or through thicker walls.



Metric to NPT adapter

Used to convert a threaded metric entry to a NPT entry.



Drain plugs

Designed to install in the bottom of an enclosure to drain any accumulated condensation. Available in aluminum or stainless steel construction.



Cap-off

Designed to install in enclosure to provide environmental cap for unused entries or knockouts.

HUB BASIC SCRU-TITE® – NEMA 2, 3, 3R, 4, 4X, 12

Zinc

UL File No. E-27258



Conduit hubs

Cat. #	Size	Unit qty.	Wt. lbs. per 100
ST 03 ^⓪	3/8"	25	11
ST 1 ^⓪	1/2"	25	19
ST 2 ^⓪	3/4"	25	27
ST 3 ^⓪	1"	25	40
ST 4 ^⓪	1 1/4"	10	51
ST 5 ^⓪	1 1/2"	10	68
ST 6 ^⓪	2"	10	92
ST 7 ^⓪	2 1/2"	5	210
ST 8 ^⓪	3"	2	245
ST 9 ^⓪	3 1/2"	2	278
ST 10 ^⓪	4"	2	318
ST 11 [ⓐ]	5"	1	478
ST 12 [ⓐ]	6"	1	685

^⓪Optional nickel-chrome plate finish. Add suffix -CP.

[ⓐ]Not supplied with insulator.

HUB BASIC SCRU-TITE® – NEMA 2, 3, 3R, 4, 4X, 12

Aluminum

UL File No. E-27258



Cat. #	Size	Unit qty.	Wt. lbs. per 100
STA 1	1/2"	25	8
STA 2	3/4"	25	11
STA 3	1"	25	17
STA 4	1 1/4"	10	30
STA 5	1 1/2"	10	30
STA 6	2"	10	38
STA 7	2 1/2"	5	80
STA 8	3"	2	100
STA 9	3 1/2"	2	138
STA 10	4"	2	150
STA 11 [ⓐ]	5"	1	300
STA 12 [ⓐ]	6"	1	300

[ⓐ]Not supplied with insulator.

GROUND HUB – NEMA 2, 3, 3R, 4, 4X, 12

316 Stainless steel

UL File No. E-59509



Cat. #	Size	Unit qty.	Wt. lbs. per 100
SSTG 1	1/2"	10	29
SSTG 2	3/4"	10	41
SSTG 3	1"	10	57
SSTG 4	1 1/4"	5	73
SSTG 5	1 1/2"	5	99
SSTG 6	2"	5	134
SSTG 7	2 1/2"	2	183
SSTG 8	3"	2	278
SSTG 9	3 1/2"	2	328
SSTG 10	4"	2	395

GROUND HUB – NEMA 2, 3, 3R, 4, 4X, 12

Zinc

UL File No. E-59509


Max. Copper
Grd. Wire Size

Cat. #	Size	Unit qty.	Wt. lbs. per 100	CSA ^⓪	UL ^⓪
STG 1	1/2"	25	20	#8	#8
STG 2	3/4"	25	28	#8	#8
STG 3	1"	25	42	#8	#8
STG 4	1 1/4"	10	55	#8	#8
STG 5	1 1/2"	10	70	#6	#8
STG 6	2"	10	95	#4	#8
STG 7	2 1/2"	5	190	#2	#6
STG 8	3"	2	243	1/0	#6
STG 9	3 1/2"	2	300	2/0	#6
STG 10	4"	2	323	2/0	#4
STG 11 [ⓐ]	5"	1	625	2/0	#2
STG 12 [ⓐ]	6"	1	750	3/0	#1

[ⓐ]Not supplied with insulator.

^⓪Use of wire terminal is required by CSA and recommended by UL for wire gauges over 10 AWG.

GROUND HUB – NEMA 2, 3, 3R, 4, 4X, 12

Aluminum

UL File No. E-59509


Max. Copper
Grd. Wire Size

Cat. #	Size	Unit qty.	Wt. lbs. per 100	CSA ^⓪	UL ^⓪
STAG 1	1/2"	25	13	#8	#8
STAG 2	3/4"	25	14	#8	#8
STAG 3	1"	25	18	#8	#8
STAG 4	1 1/4"	10	25	#8	#8
STAG 5	1 1/2"	10	33	#6	#8
STAG 6	2"	10	41	#4	#8
STAG 7	2 1/2"	5	90	#2	#6
STAG 8	3"	2	103	1/0	#6
STAG 9	3 1/2"	2	138	2/0	#6
STAG 10	4"	2	140	2/0	#4
STAG 11 [ⓐ]	5"	1	325	3/0	#2
STAG 12 [ⓐ]	6"	1	350	3/0	#1

[ⓐ]Not supplied with insulator.

^⓪Use of wire terminal is required by CSA and recommended by UL for wire gauges over 10 AWG.