

TYPE: _____
CATALOG #: _____
NOTES: _____



DISTRIBUTOR SELECT

EL-2LED Series

Low Energy, Low Maintenance Emergency Lighting for Moderate Budget Applications

Features

- Fully adjustable LED glare-free heads
- 3.6V-3.6W long-life LED illumination

Construction

- Injection-molded, UV stabilized thermoplastic
- UL94, 5VA flame rated body
- Snap-together design
- Corrosion and scratch-resistant in white or black color

Electrical

- Automatic, temperature compensated, pulse type charger
- High capacity, automatic, dust-tight instantaneous transfer relay
- Low voltage disconnect prevents over discharge of battery
- Automatic brownout protection
- Battery lock-out prevents discharge during installation
- Sealed maintenance free 3.6V Nickel-Metal Hydride battery
- Red charger monitor LED indicates charging of the battery
- Momentary test switch allows for quick operational check of entire system

Installation

- Ceiling or wall mount
- Rear keyhole slots and universal knock-outs to mount to any standard 4" junction box

Listings

- UL924 Listed
- Damp location listing is standard (68° F to 86° F)

Warranty

- 3-year limited warranty
- Detailed warranty terms located at: www.emergi-lite.com/usa/files/EL_Warranty.pdf


Suggested Specification

Supply and install the **Emergi-Lite® EL-2LED Series** emergency light unit. The compact housing shall be of impact resistant thermoplastic and allow for ceiling or wall installations. The overall dimensions shall be not more than 10in long by 5in high by 3in deep. The light source shall be long-life high output white LEDs with reflector/refractor combination optics inside a round shape housing. Unit shall have a dual input voltage of 120/277Vac 60Hz, be supplied with sealed Nickel-Metal Hydride maintenance free battery, and perform minimum 90 minutes of emergency illumination upon AC failure. The unit shall have provisions to power an extra dual remote light EF43D or EF44D for minimum 90 minutes of emergency illumination upon AC failure. The equipment shall be UL-924 listed for Damp location 50°F to 104°F (10°C to 40°C).

The equipment shall be **Emergi-Lite®** model: _____.

Dimensions

Dimensions are approximate and subject to change.

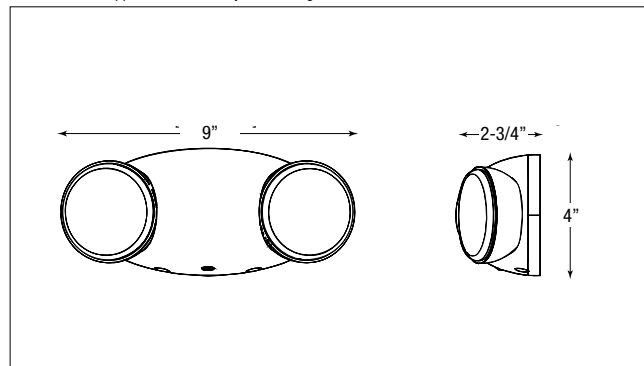

Power Consumption

Model	Current (A) / Power (W)
	120/277VAC, 60Hz
EL-2LED	0.103/0.10A
EL-2LEDR	0.13/0.16A
EL-2LEDR-AD	0.058/0.029A

How to Order

COLOR	SERIES	LAMP OPTION	OPTIONS
Blank= White B= Black	EL	_2LED= round LED array	Blank= No option R= Remote capacity to power one double head remote* R_AD= One double head dedicated remote with Advanced-Diagnostics* * Remote capacity can only be used to power the EF43D or EF44D remote fixtures or to extend the battery units emergency run time beyond the standard 90 minutes.

Example: EL_2LEDR