


Fireball® Strobe Warning Light (FB2PST/FB2PST-I)

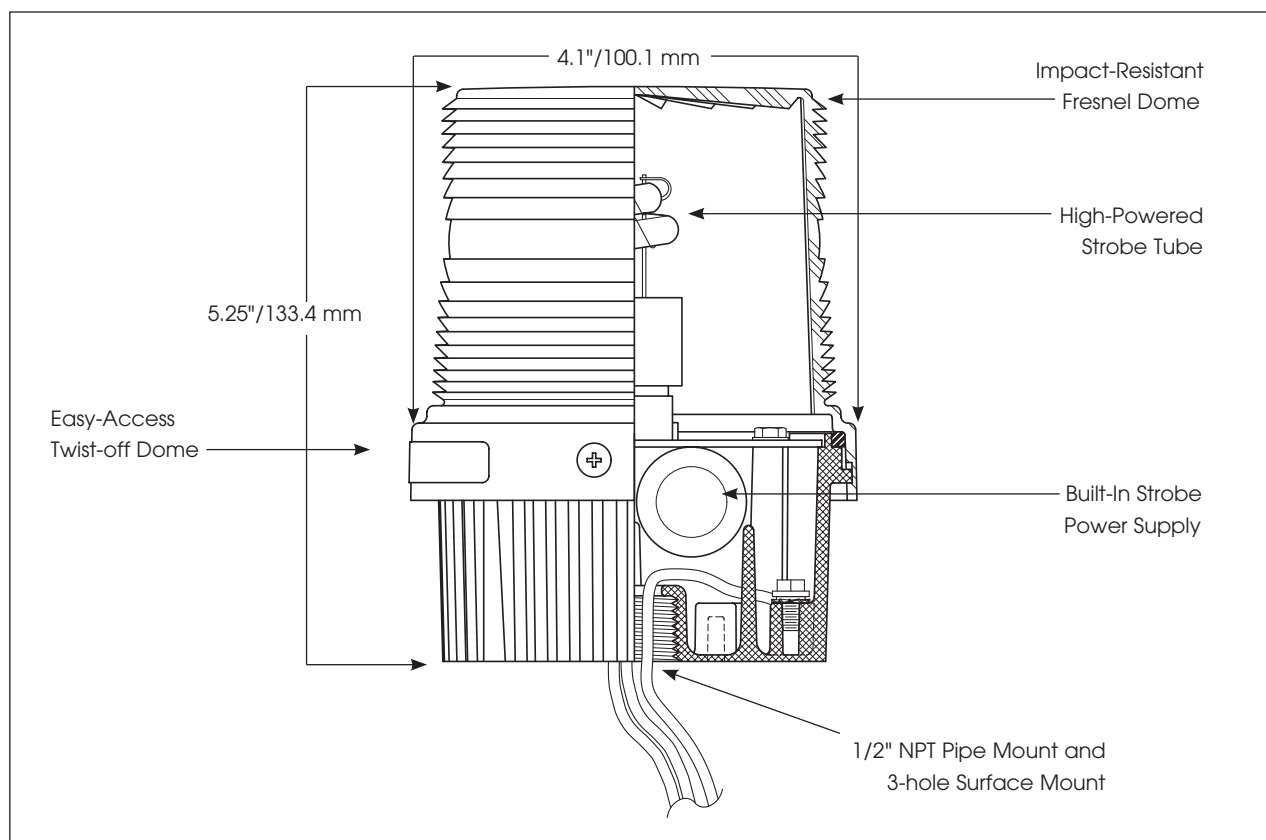


SPECIFICATIONS

Lamp Life:	10,000 Hours
Light Source:	Strobe tube
Operating Temperature:	-31°F to 150°F -35°C to 66°C
Net Weight:	2.0 lbs 0.9 kg
Shipping Weight:	2.12 lbs 0.96 kg
Height:	5.25" 133.4 mm
Diameter:	4.10" 100.1 mm

REPLACEMENT PARTS

Description	Part Number
Dome, Amber	K8550320A
Dome, Blue	K8550320A-01
Dome, Clear	K8550320A-02
Dome, Green	K8550320A-03
Dome, Magenta	K8550320A-05
Dome, Red	K8550320A-04
PC Assembly, 120VAC	K200D866G
PC Assembly, 240VAC	K200D866G-01
Strobe Tube, Series A4, A5, B	K8107177A

HOW TO ORDER

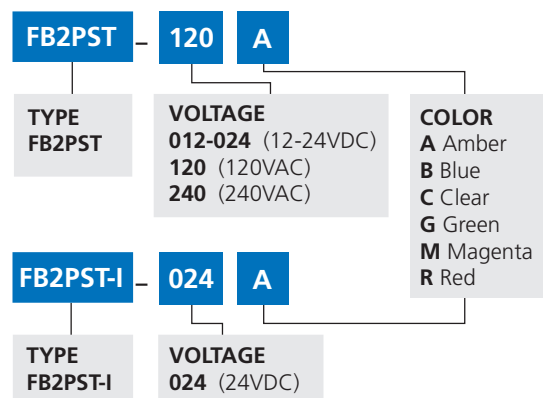


OPTIONAL ACCESSORIES

Description	Part Number
Corner Bracket	LCMB2*
Wall Bracket	LWMB2*
Hazardous Location Mounting Bracket	LHWB

*Not Type 4X rated

Mounting Brackets shown on pages 128-131


Electraray® Hazardous Location Warning Light (225XST/225XST-I)

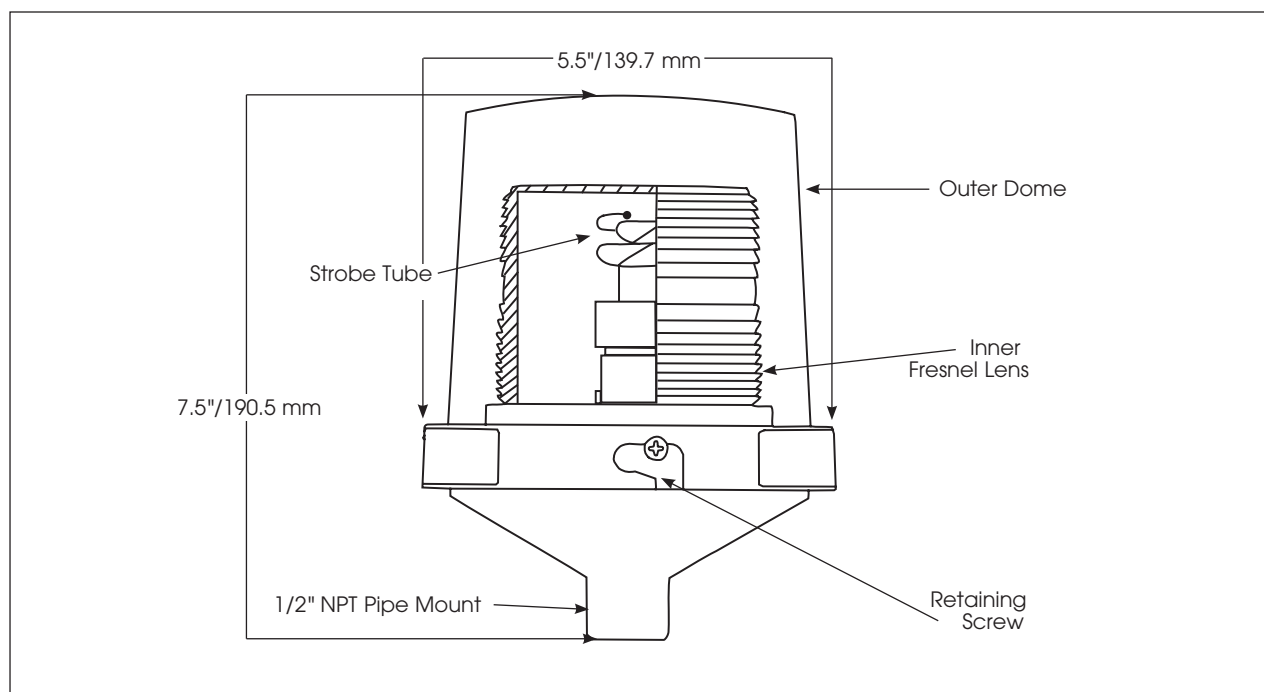

SPECIFICATIONS

Lamp Life:	10,000 Hours
Light Source:	Strobe tube
Operating Temperature:	-40°F to 104°F -40°C to 40°C
Net Weight:	1.5 lbs 0.68 kg
Shipping Weight:	2.0 lbs 0.9 kg
Height:	7.5" 190.5 mm
Diameter:	5.5" 139.7 mm

HOW TO ORDER

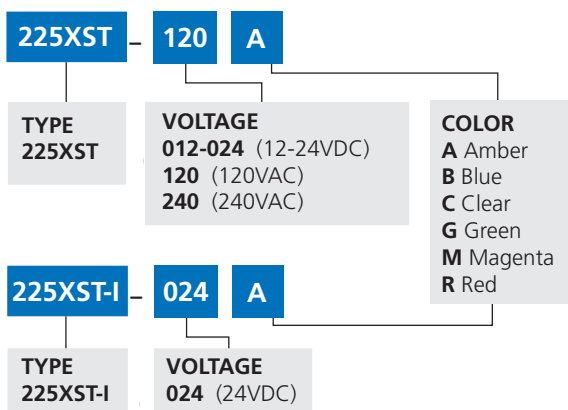

REPLACEMENT PARTS

Description	Part Number
Interior Lens, Amber	K8550C095A-02
Interior Lens, Blue	K8550C095A-01
Interior Lens, Clear	K8550C095A
Interior Lens, Green	K8550C095A-04
Interior Lens, Magenta	K8550C095A-07
Interior Lens, Red	K8550C095A-03
Exterior Dome, Clear*	K8444D219C-04
PC Assembly, 120VAC	K2001905A
PC Assembly, 240VAC	K2001905A-01
Strobe Tube	K8107177A


*Includes 1 dome gasket

OPTIONAL ACCESSORIES

Description	Part Number
Hazardous Location Mounting Bracket	LHWB

Mounting Brackets shown on pages 130-131

Fireball® Hearing Impaired Strobe Warning Light (FB24STHI/FB24STHI-024C-CN)

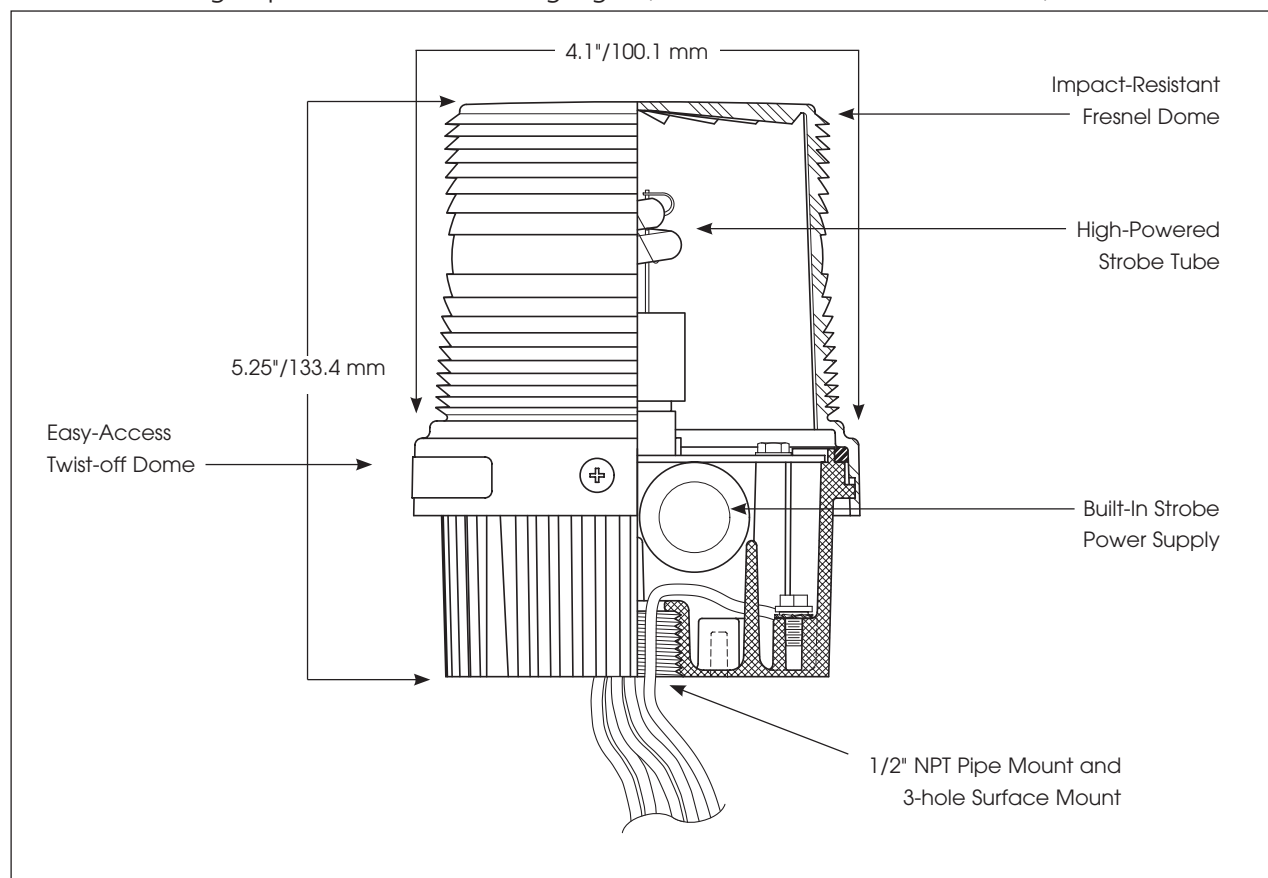

SPECIFICATIONS

Lamp Life:	10,000 Hours
Lamp Source:	Strobe
Operating Temperature:	-31°F to 150°F -35°C to 66°C
Net Weight:	1.45 lbs 0.7 kg
Shipping Weight:	1.7 lbs 0.8 kg
Height:	5.25" 133.4 mm
Diameter:	4.1" 100.1 mm

HOW TO ORDER

FB24STHI	-	024	C	-CN
TYPE FB24STHI		VOLTAGE 024 (24VDC)	COLOR C Clear	FIRE LISTING Blank UL -CN ULC

REPLACEMENT PARTS *


Description	Part Number
Dome, Clear	K8550320A-02
Strobe Tube	K8107177A

OPTIONAL ACCESSORIES

Description	Part Number
Corner Bracket	LCMB2*
Wall Bracket	LWMB2

*Bracket not Type 4X rated.
Mounting Brackets shown on pages 128-131

Fireball® Strobe Warning Light (FB24ST)

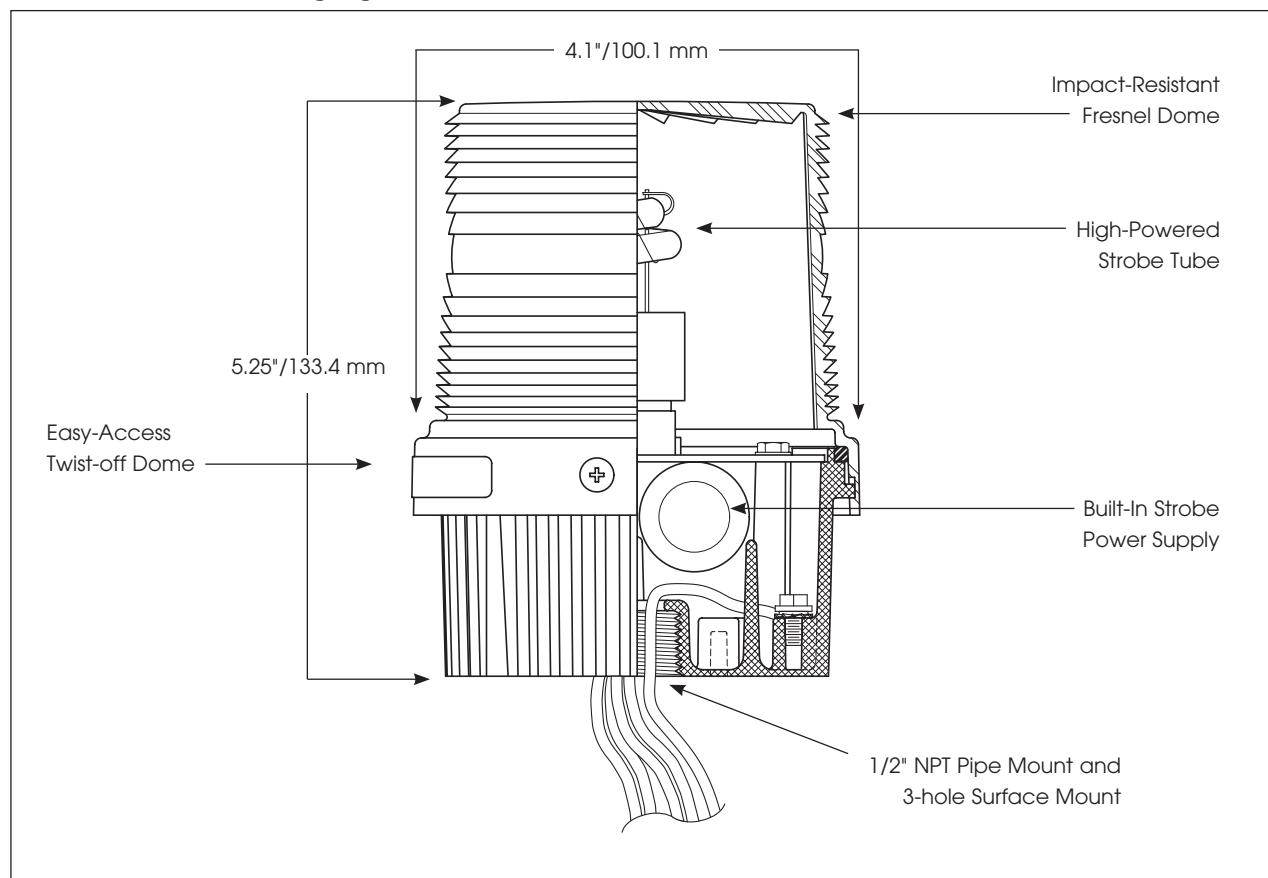

SPECIFICATIONS

Lamp Life:	10,000 Hours	
Lamp Source:	Strobe	
Operating Temperature:	-31°F to 150°F	-35°C to 66°C
Net Weight:	1.45 lbs	0.7 kg
Shipping Weight:	1.7 lbs	0.8 kg
Height:	5.25"	133.4 mm
Diameter:	4.1"	100.1 mm

HOW TO ORDER

FB24ST

- 024

A

TYPE
FB24STVOLTAGE
024 (24VDC)

COLOR

A Amber

B Blue

C Clear

G Green

R Red

REPLACEMENT PARTS

Description	Part Number
Dome, Amber	K8550320A
Dome, Blue	K8550320A-01
Dome, Clear	K8550320A-02
Dome, Green	K8550320A-03
Dome, Red	K8550320A-04
Strobe Tube, Series A4, A5, B	K8107177A

OPTIONAL ACCESSORIES

Description	Part Number
Corner Bracket	LCMB2*
Wall Bracket	LWMB2

*Bracket not Type 4X rated.