



- Models AM25CK, AM70CK, 300CK, E300CK and T300CK

SelecTone® Connector Kits


Our connector kits allow existing public address systems to be expanded through SelecTone® amplified speakers by converting and conditioning the incoming audio signal to the required input level for the amplifier within the speaker. There is no external power required as each kit plugs directly into a card edge connector in the speaker.

Note: Model T300CK is compatible with ECHO models only.

F E A T U R E S

- Interfaces SelecTone® speaker/amplifiers with an existing paging system
- Works in 25 or 70 Vrms systems
- Creates a “balanced line” SelecTone® System
- UL and cUL Listed, CSA Certified and CSFM


Selectone® Connector Kits (AM25CK, AM70CK, 300CK, T-300CK, E-300CK)

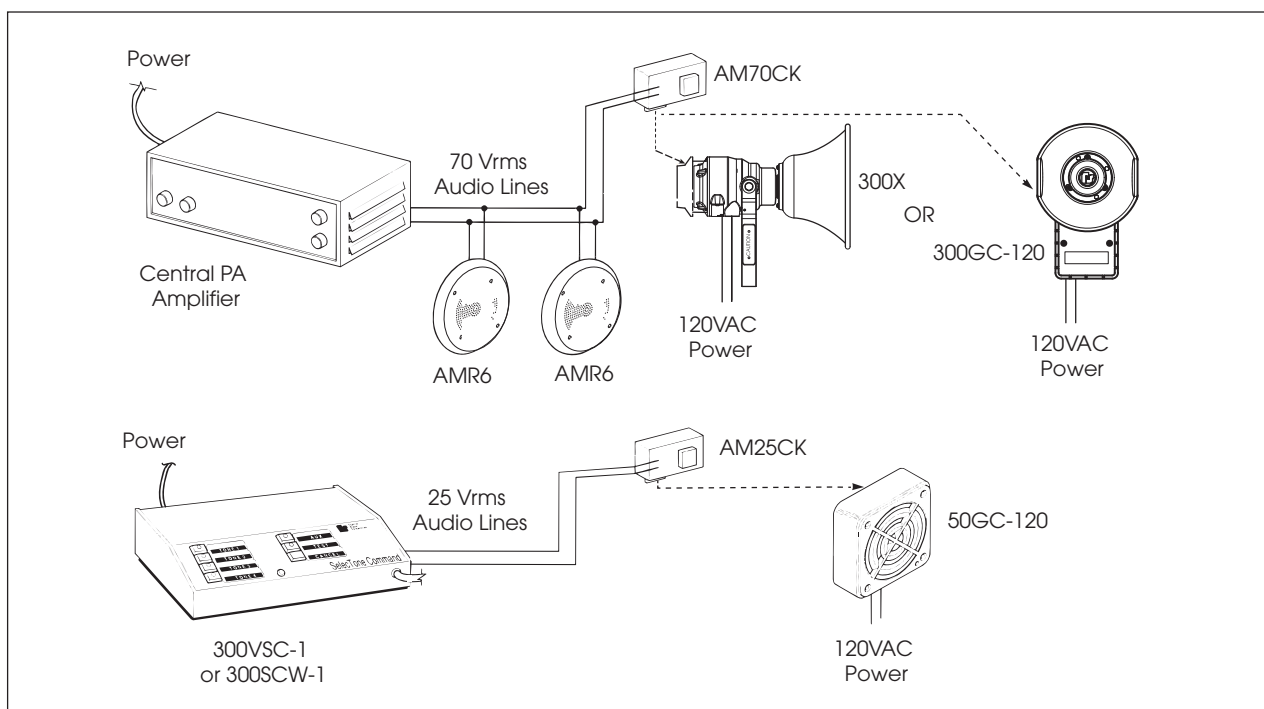

HOW TO ORDER

	Model Number	Audio Input	Audio Output
	AM25CK	25 Vrms	1 Vrms
	AM70CK	70 Vrms	1 Vrms
	300CK	10 Vrms	1 Vrms
	T-300CK	2.7 Vrms	1 Vrms
	E-300CK	1 Vrms	1 Vrms

Explosion-Proof Amplified Speakers (ASHX and ASUX)

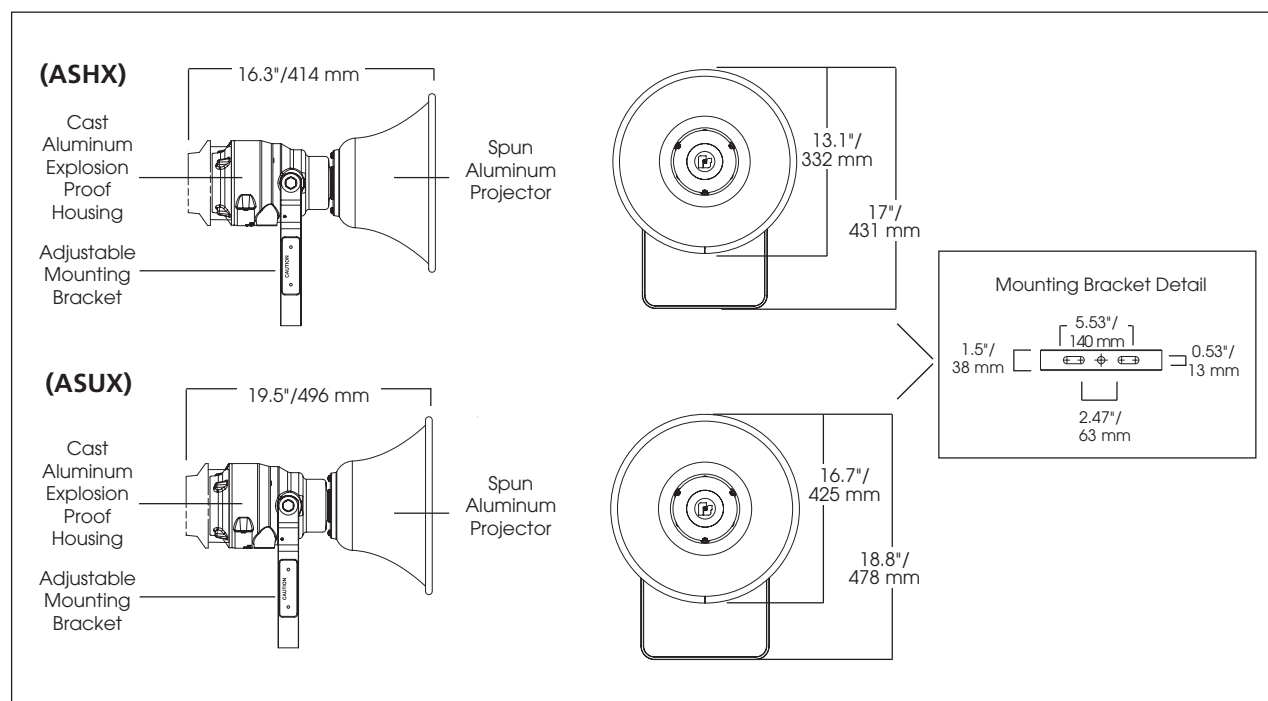

SPECIFICATIONS

ASHX

Operating Temperature:	-40°F to 150°F	-40°C to 66°C
Net Weight:	15.4 lbs	7.0 kg
Shipping Weight:	22.8 lbs	10.4 kg
Height:	17.0"	431.80 mm
Width:	13.1"	332.73 mm
Depth:	16.3"	414.02 mm

ASUX

Operating Temperature:	-40°F to 150°F	-40°C to 66°C
Net Weight:	16.4 lbs	7.4 kg
Shipping Weight:	32.4 lbs	14.7 kg
Height:	18.8"	477.52 mm
Width:	16.7"	424.17 mm
Depth:	19.5"	495.30 mm

REPLACEMENT PARTS

Description**Part Number****ASHX**

Horn Assembly, Red	K8593100A-01
Mounting Bracket Assembly	K8593071A
4 Position connector	K140340B

ASUX

Mounting Bracket Assembly	K8593071A
4 Position connector	K140340B

OPTIONAL ACCESSORIES

Description**Part Number**

Universal Tone Module	UTM
-----------------------	-----

Specify Connector Kit for use in systems:

70 Vrms Connector Kit	AM70CK
25 Vrms Connector Kit	AM25CK

HOW TO ORDER

Specify Model:**ASHX-024** – 0.7 amps, 110 dBa @ 10' (120 dBa @ 1 m)**ASUX-024** – 1.0 amps, 114 dBa @ 10' (124 dBa @ 1 m)