


Litestak® Light (LSL) and Base (LSB)

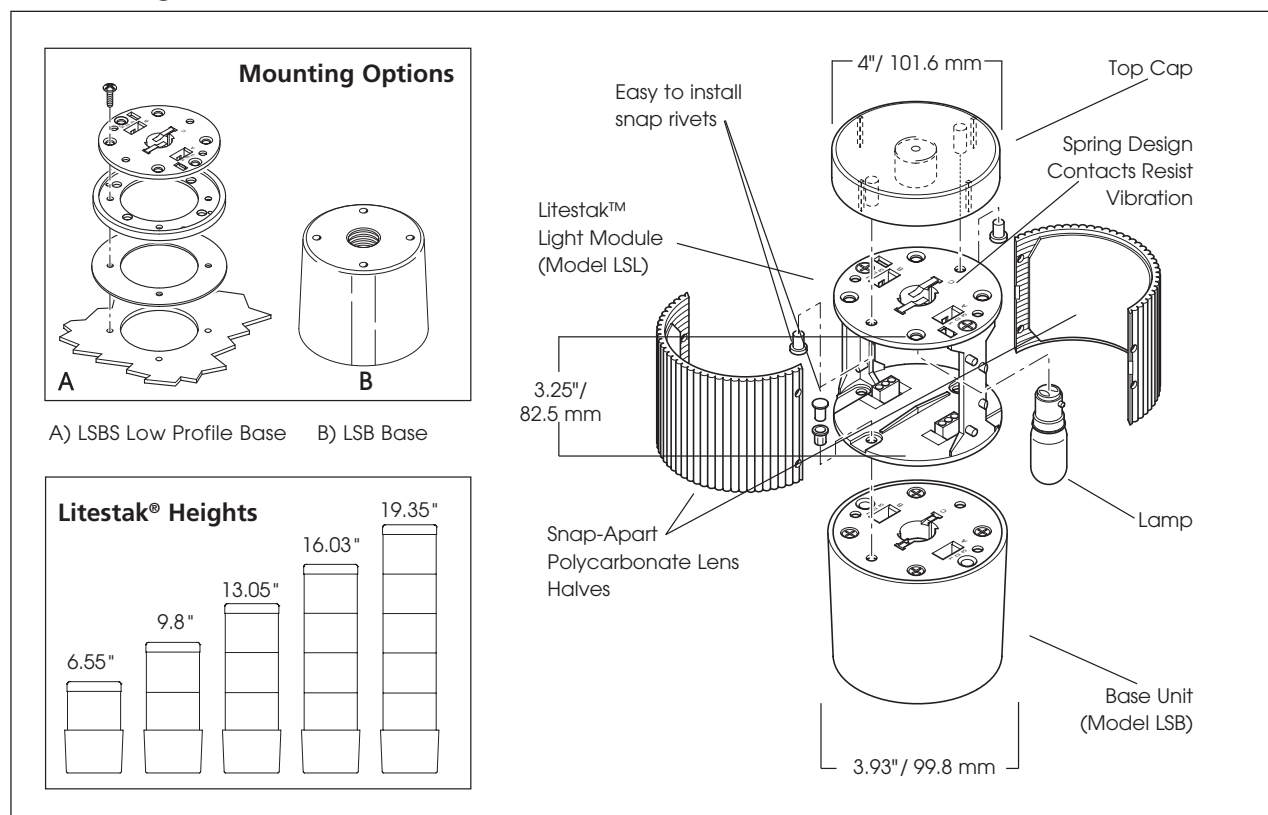

SPECIFICATIONS

Lamp Life:		2,500 Hours
Light Source:		Incandescent
Operating Temperature:	0°F to 120°F	-18°C to 49°C
Net Weight:	LSL 0.5 lbs LSB 0.75 lbs	0.2 kg 0.3 kg
Shipping Weight:	LSL 0.8 lbs LSB 1.0 lbs	0.4 kg 0.4 kg
Height:	LSL 3.25" LSB 3.3"	82.5 mm 82.8 mm
Diameter:	LSL 3.93" LSB 3.93"	99.8 mm 99.8 mm

REPLACEMENT PARTS

Description	Part Number
Litestak Lens Kit ¹	K844700352A
Lamp, 24VDC	K8107210A
Lamp, 120VAC	K8107194A
Lamp, 240VAC	K8107A149A
Flasher, 24VDC	K8285237A
Flasher, 120VAC	K8285239A

¹ Includes 1 of each lens: Amber, Blue, Clear, Green and Red
(does not include blackout 1/2 lens), snap rivets and cap

HOW TO ORDER

