


StreamLine® Low Profile Strobe Light (LP3S/LP3P/LP3T)

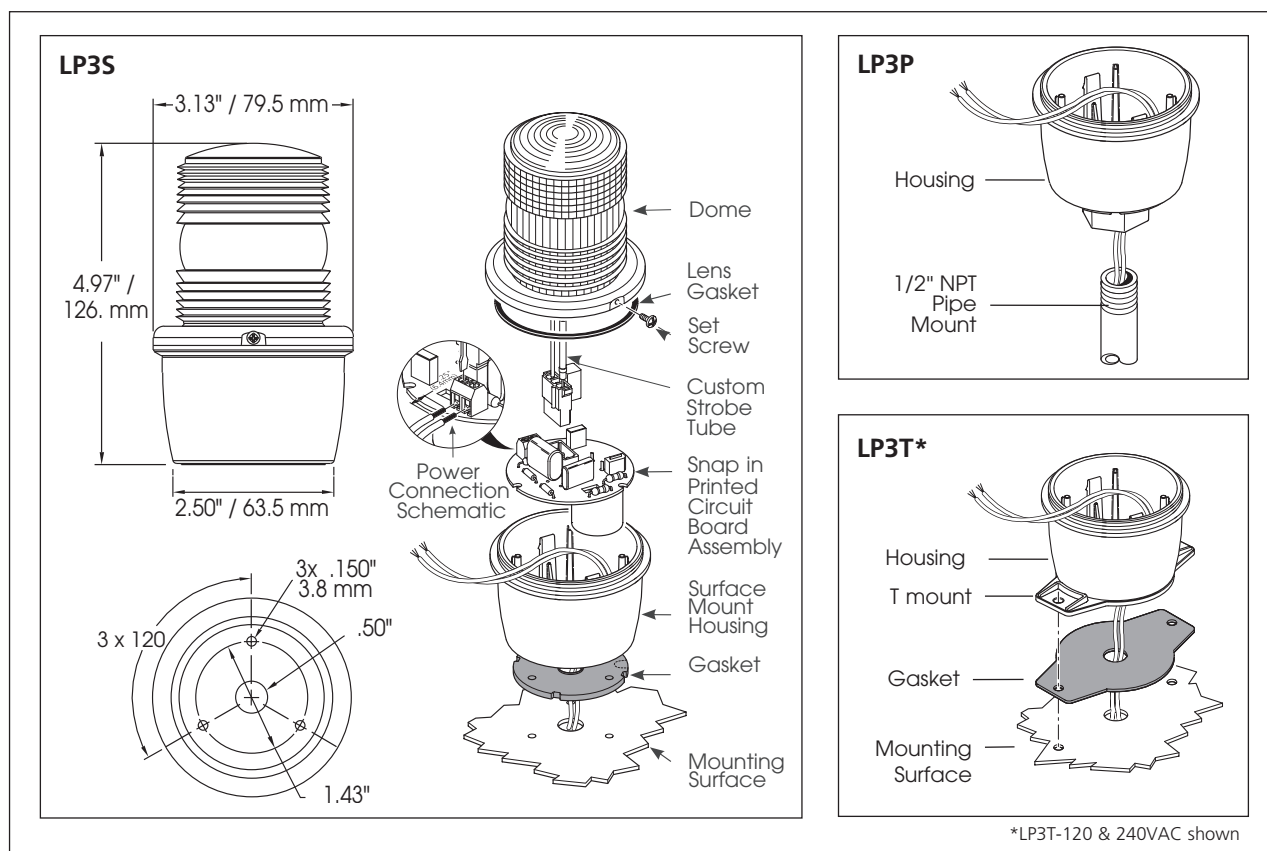

SPECIFICATIONS

Lamp Life:	4,000 Hours	
Light Source:	Strobe tube	
Operating Temperature:	-31°F to 151°F	-35°C to 66°C
Net Weight:	0.23 lbs	0.1 kg
Shipping Weight:	0.6 lbs	0.27 kg
Height:	2.61"	66.3 mm
Width:	2.33"	59.2 mm
Length:	5.05"	128.3 mm

REPLACEMENT PARTS

Description	Part Number
Dome, Amber	K8589063A
Dome, Blue	K8589063A-01
Dome, Clear	K8589063A-02
Dome, Green	K8589063A-03
Dome, Red	K8589063A-04
Strobe Tube	K149130A
Gasket Kit ¹	K858900353A

¹ Includes gasket for LP3S and LP3T

HOW TO ORDER

LP3	S	-	120	A
TYPE LP3	MOUNT S Surface P Pipe T T-Mount		VOLTAGE 012-048 (12-48VDC) 120 (120VAC) 240 (240VAC)	COLOR A Amber B Blue C Clear G Green R Red


OPTIONAL ACCESSORIES

Description	Part Number
Wire/Dome Guard for LP3S and LP3T	LP3G



LP3G

Audible / Visual Signaling Device (AV1ST)

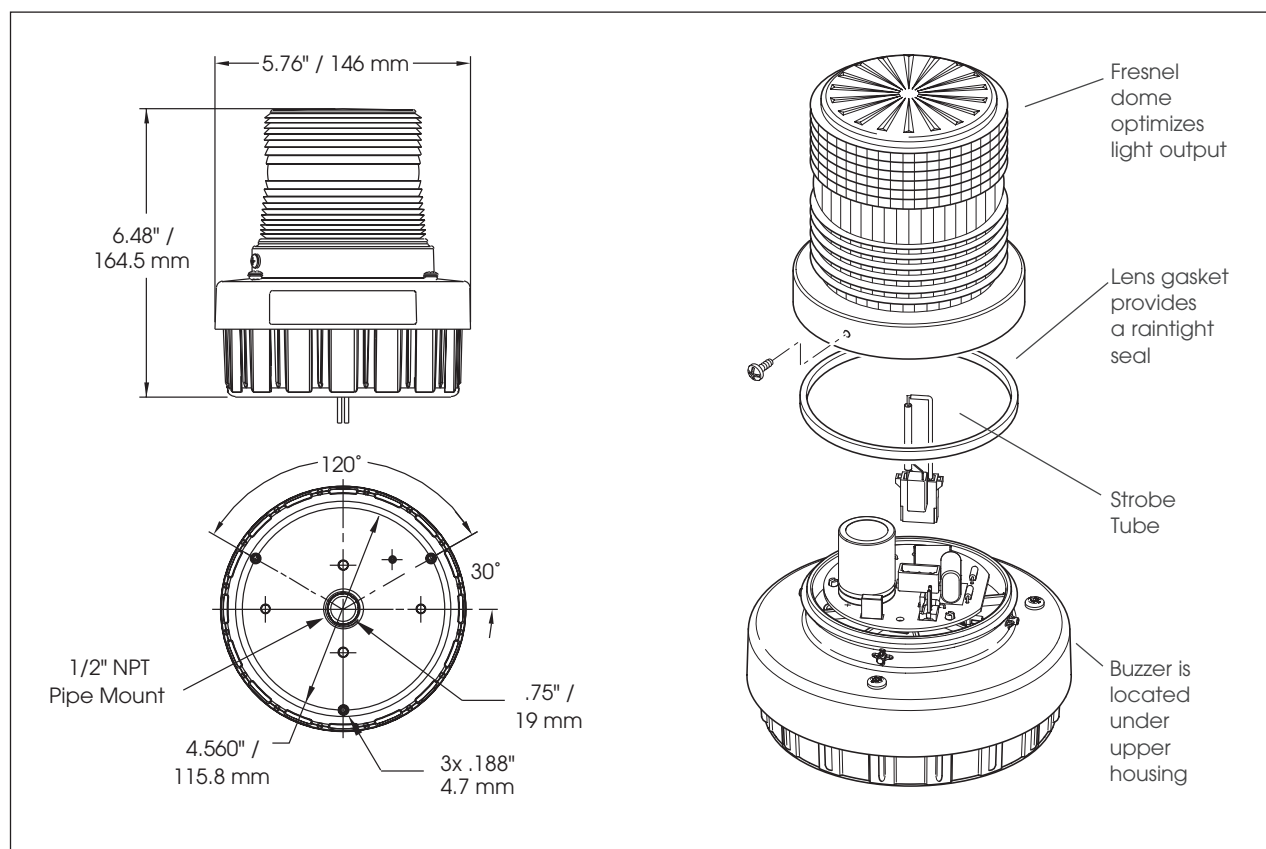

SPECIFICATIONS

Lamp Life	7,000 Hours	
Light Source:	Strobe tube	
Operating Temperature:	-31°F to 150°F	-35°C to 66°C
Net Weight:	1.25 lbs	0.57 kg
Shipping Weight:	1.75 lbs	0.8 kg
Height:	6.48"	164.5 mm
Diameter:	5.76"	146 mm

REPLACEMENT PARTS

Description	Part Number
Dome Kit, Amber ¹	K8550292A-02
Dome Kit, Blue ¹	K8550292A-01
Dome Kit, Clear ¹	K8550292A
Dome Kit, Green ¹	K8550292A-04
Dome Kit, Red ¹	K8550292A-03
Strobe Tube	K149130A
Buzzer, 24VDC	K8591002A-01
Buzzer, 120VAC	K8591002A

¹ Includes 1 lens gasket

HOW TO ORDER

AV1ST	-	024	A
TYPE AV1ST		VOLTAGE 024 (24VDC) 120 (120VAC)	COLOR A Amber B Blue C Clear G Green R Red

OPTIONAL ACCESSORIES

Description	Part Number
Corner Bracket	LCMB2*
Wall Bracket	LWMB2*
Hazardous Location Mounting Bracket	LHWB

*Rated for NEMA 3R installations

Mounting Brackets shown on pages 128-131