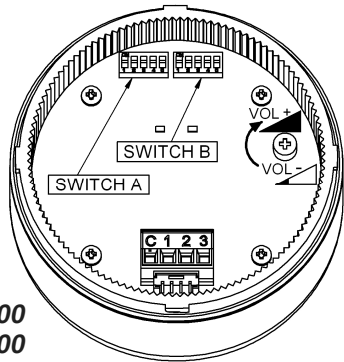



|           |                                                                      |
|-----------|----------------------------------------------------------------------|
| ATTENTION | Disconnect power before servicing                                    |
| ATENCIÓN  | Desconecte la corriente antes de abrir el producto                   |
| ATTENTION | Débranchez l'alimentation avant de toute intervention sur le produit |

SLM500  
SLM700



SETTING EXAMPLE




ON=1  
OFF=0

1 1 1 1 1

SWITCH A: SIMULATED BELL  
SWITCH B: CHIME 3 REP

INSTALLATION AND APPLICATION INSTRUCTIONS  
INSTRUCCIONES DE INSTALACIÓN Y EMPLEO - INSTRUCTIONS D' INSTALLATION ET D' UTILISATION

SLM500  
SLM700

















SLMBS - 012 - 024


SLMBD - 012 - 024  
SLMBD - 120 - 240

SLMBW - 012 - 024  
SLMBW - 120 - 240


SLMBT - 012 - 024  
SLMBT - 120 - 240

| SWITCH A SOUNDS |                   |                                                                                     |             |                                    |                             |            |
|-----------------|-------------------|-------------------------------------------------------------------------------------|-------------|------------------------------------|-----------------------------|------------|
| N°              | tone              | tone type                                                                           | F(Hz)       | times                              | DESCRIPTION                 | DIP SWITCH |
| 1               | BI-TONE           |    | 600 - 700   | 0.5s/0.5s                          | STANDARD                    | 0 0 0 0 0  |
| 2               | MULTI-TONE        |    | 1000 - 1700 | CICLE 0.25s                        | STANDARD                    | 1 0 0 0 0  |
| 3               | MODULATED         |    | 1000 - 1700 | CICLE 0.8s                         | STANDARD                    | 0 1 0 0 0  |
| 4               | BI-TONE           |    | 440 - 560   | 565s/565s                          | STANDARD - EVACUATION       | 1 1 0 0 0  |
| 5               | LINEAR            |    | 300         |                                    | GENERAL PURPOSE             | 0 0 1 0 0  |
| 6               | LINEAR            |    | 660         |                                    | SWEDISH (ALL CLEAR)         | 1 0 1 0 0  |
| 7               | LINEAR            |    | 750         |                                    | GENERAL PURPOSE             | 0 1 1 0 0  |
| 8               | LINEAR            |    | 2850        |                                    | GENERAL PURPOSE             | 1 1 1 0 0  |
| 9               | SWEEP             |    | 500 - 1200  | 3.5s ON/0.5s OFF                   | NETHERLANDS-NEN2575:2000    | 0 0 0 1 0  |
| 10              | SWEEP             |    | 500 - 1200  | 0.5s ON/0.5s OFF X 3 1.5s OFF      | AUSTRALIA AS1670            | 1 0 0 1 0  |
| 11              | SWEEP             |    | 800 - 970   | 0.5s ON/0.5s OFF X 3 1.5s OFF      | ISO 8201                    | 0 1 0 1 0  |
| 12              | INTERMITTENT      |    | 420         | 0.625s ON/0.625s OFF               | AUSTRALIA AS1670 ALERT TONE | 1 1 0 1 0  |
| 13              | INTERMITTENT      |    | 660         | 0.15s ON/0.15s OFF                 | SWEDISH (AIR RAID)          | 0 0 1 1 0  |
| 14              | INTERMITTENT      |    | 660         | 1.8s ON/1.8s OFF                   | SWEDISH (LOCAL WARNING)     | 1 0 1 1 0  |
| 15              | INTERMITTENT      |    | 660         | 0.5s ON/0.5s OFF                   | SWEDISH GENERAL PURPOSE     | 0 1 1 1 0  |
| 16              | INTERMITTENT      |    | 720         | 0.7s ON/0.3s OFF                   | GENERAL PURPOSE             | 1 1 1 1 0  |
| 17              | INTERMITTENT      |  | 750         | 0.33s ON/0.5s OFF                  | GENERAL PURPOSE             | 0 0 0 0 1  |
| 18              | INTERMITTENT      |  | 800         | 0.25s ON/1s OFF                    | GENERAL PURPOSE             | 1 0 0 0 1  |
| 19              | INTERMITTENT      |  | 970 - 800   | 0.35s/0.35s/0.35s OFF X 3 1.5s OFF | ISO 8201                    | 0 1 0 0 1  |
| 20              | INTERMITTENT      |  | 970         | 0.5s ON/0.5s OFF X 3 1.5s OFF      | ISO 8201 LOW TONE           | 1 1 0 0 1  |
| 21              | INTERMITTENT      |  | 970         | 0.25s ON/0.25s OFF                 | GENERAL PURPOSE             | 0 0 1 0 1  |
| 22              | INTERMITTENT      |  | 2850        | 1s ON/1s OFF                       | GENERAL PURPOSE             | 1 0 1 0 1  |
| 23              | INTERMITTENT      |  | 2850        | 0.25s ON/0.25s OFF                 | GENERAL PURPOSE             | 0 1 1 0 1  |
| 24              | BI-TONE           |  | 600 - 700   | 0.5s/0.5s                          | GENERAL PURPOSE             | 1 1 1 0 1  |
| 25              | BI-TONE           |  | 800 - 970   | 0.25s/0.25s                        | BS5839-1:2002               | 0 0 0 1 1  |
| 26              | BI-TONE           |  | 800 - 970   | 0.8s/0.8s                          | GENERAL PURPOSE             | 1 0 0 1 1  |
| 27              | BI-TONE           |  | 1000 - 2000 | 1s/1s                              | GENERAL PURPOSE             | 0 1 0 1 1  |
| 28              | CHIME 1 SINGLE    |  | 700 - 600   | 0.4s/0.7s                          | SINGLE SHOT DING DONG       | 1 1 0 1 1  |
| 29              | CHIME 1 REPEATING |  | 700 - 600   | 0.4s/0.7s OFF                      | REPEATING DING DONG         | 0 0 1 1 1  |
| 30              | CHIME 1 REPEATING |  | 700 - 600   | 0.25s/0.4s OFF                     | REPEATING DING DONG         | 1 0 1 1 1  |
| 31              | HOOTER REPEATING  |  | -           | 3s ON/2s OFF                       | GENERAL PURPOSE             | 0 1 1 1 1  |
| 32              | SIMULATED BELL    |  | 1850        | 0.1s (modulated 0.03s)             | GENERAL PURPOSE             | 1 1 1 1 1  |


| SWITCH B SOUNDS |                |                                                                                     |             |                               |                                |            |
|-----------------|----------------|-------------------------------------------------------------------------------------|-------------|-------------------------------|--------------------------------|------------|
| N°              | tone           | tone type                                                                           | F(Hz)       | times                         | DESCRIPTION                    | DIP SWITCH |
| 1               | INTERMITTENT   |  | 490         | 0.5s ON/1s OFF                | GENERAL PURPOSE - WARNING      | 0 0 0 0 0  |
| 2               | BI-TONE        |  | 480 - 610   | 0.5s/0.5s                     | GENERAL PURPOSE - EVACUATION 1 | 1 0 0 0 0  |
| 3               | LINEAR         |  | 610         | -                             | GENERAL PURPOSE - EVACUATION 2 | 0 1 0 0 0  |
| 4               | LINEAR         |  | 500         | -                             | GENERAL PURPOSE                | 1 1 0 0 0  |
| 5               | LINEAR         |  | 970         | -                             | BS5839-1:2002                  | 0 0 1 0 0  |
| 6               | SWEEP          |  | 500 - 1200  | CICLE 3.75s/0.25s OFF         | AS2220                         | 1 0 1 0 0  |
| 7               | SWEEP          |  | 1400 - 1600 | CICLE 1.5s                    | NF 48-265                      | 0 1 1 0 0  |
| 8               | SWEEP          |  | 800 - 970   | CICLE 1.5s                    | BS5839-1:2002                  | 1 1 1 0 0  |
| 9               | SWEEP          |  | 1200 - 500  | CICLE 1s                      | DIN 33 404                     | 0 0 0 1 0  |
| 10              | INTERMITTENT   |  | 544         | 0.625s ON/0.625s OFF          | GENERAL PURPOSE                | 1 0 0 1 0  |
| 11              | INTERMITTENT   |  | 660         | 6.5s ON/13s OFF               | SWEDISH (PRE-MESS)             | 0 1 0 1 0  |
| 12              | INTERMITTENT   |  | 970         | 1s ON/1s OFF                  | APOLLO FIRE SYSTEM BS5839      | 1 1 0 1 0  |
| 13              | INTERMITTENT   |  | 2850        | 0.5s ON/0.5s OFF X 3 1.5s OFF | ISO 8201 HIGHT TONE            | 0 0 1 1 0  |
| 14              | BI-TONE        |  | 970 - 630   | 0.5s/0.5s                     | APOLLO FIRE SYSTEM BS5839      | 1 0 1 1 0  |
| 15              | BI-TONE        |  | 554 - 440   | 0.1s/0.4s                     | FRANCE - AFNOR NF S 32 001     | 0 1 1 1 0  |
| 16              | BI-TONE        |  | 440 - 554   | 0.5s/0.5s                     | GENERAL PURPOSE                | 1 1 1 1 0  |
| 17              | BI-TONE        |  | 510 - 610   | 0.5s/0.5s                     | GENERAL PURPOSE                | 0 0 0 0 1  |
| 18              | BI-TONE        |  | 510 - 610   | 1s/1s                         | GENERAL PURPOSE                | 1 0 0 0 1  |
| 19              | BI-TONE        |  | 600 - 700   | 1s/1s                         | GENERAL PURPOSE                | 0 1 0 0 1  |
| 20              | BI-TONE        |  | 550 - 1000  | 0.5s/0.5s                     | GENERAL PURPOSE                | 1 1 0 0 1  |
| 21              | BI-TONE        |  | 550 - 1000  | 1s/1s                         | GENERAL PURPOSE                | 0 0 1 0 1  |
| 22              | BI-TONE        |  | 800 - 1000  | 0.5s/0.5s                     | GENERAL PURPOSE                | 1 0 1 0 1  |
| 23              | BI-TONE        |  | 800 - 1000  | 1s/1s                         | GENERAL PURPOSE                | 0 1 1 0 1  |
| 24              | BI-TONE        |  | 1000 - 2000 | 0.5s/0.5s                     | GENERAL PURPOSE                | 1 1 1 0 1  |
| 25              | BI-TONE        |  | 2400 - 2850 | 0.265s/0.265s                 | GENERAL PURPOSE                | 0 0 0 1 1  |
| 26              | BI-TONE        |  | 2400 - 2850 | 0.465s/0.465s                 | GENERAL PURPOSE                | 1 0 0 1 1  |
| 27              | BI-TONE        |  | 640 - 970   | 0.5s/0.5s                     | GENERAL PURPOSE                | 0 1 0 1 1  |
| 28              | BI-TONE        |  | 490 - 610   | 0.25s/0.25s                   | GENERAL PURPOSE                | 1 1 0 1 1  |
| 29              | CHIME 2 SINGLE |  | 554 - 440   | 0.35s/0.7s                    | SINGLE SHOT DING DONG          | 0 0 1 1 1  |
| 30              | CHIME 2 REP    |  | 554 - 440   | 0.35s/0.7s/0.5s OFF           | REPEATING DING DONG            | 1 0 1 1 1  |
| 31              | CHIME 3 SINGLE |  | 1300 - 944  | 0.5s/1s                       | SINGLE SHOT DING DONG          | 0 1 1 1 1  |
| 32              | CHIME 3 REP    |  | 1300 - 944  | 0.5s/1s/0.5s OFF              | REPEATING DING DONG            | 1 1 1 1 1  |

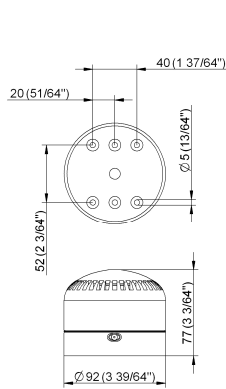


SLM500 + SLMBS  
SLM700 + SLMBS

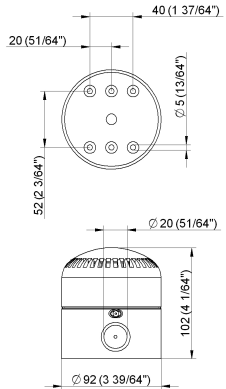

SLM500 + SLMBD  
SLM700 + SLMBD

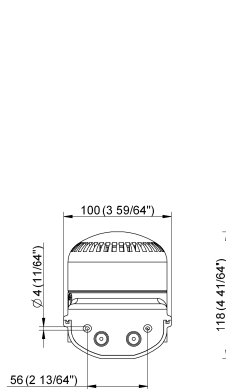

SLM500 + SLMBW  
SLM700 + SLMBW

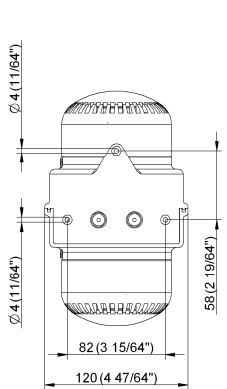

SLM500 + SLMBT  
SLM700 + SLMBT

SLM700

|                                                                                         |        |     |
|-----------------------------------------------------------------------------------------|--------|-----|
| V  | 12-24  |     |
| V  |        |     |
| mA                                                                                      | 240    | 280 |
| dB(A)1m                                                                                 | 87-105 |     |

SLM500

|                                                                                         |        |     |
|-----------------------------------------------------------------------------------------|--------|-----|
| V  | 12-24  |     |
| V  |        |     |
| mA                                                                                      | 380    | 460 |
| dB(A)1m                                                                                 | 87-105 |     |

All dims in mm unless otherwise noted  
Todas las dimensiones son en mm, salvo que sea indicado de otra manera  
Toutes les dimensions sont en mm, sauf indication contraire

SLM700

|                                                                                         |         |    |
|-----------------------------------------------------------------------------------------|---------|----|
| V  | 120-240 |    |
| mA                                                                                      | 60      | 35 |
| dB(A)1m                                                                                 | 87-105  |    |

SLM500

|                                                                                         |         |    |
|-----------------------------------------------------------------------------------------|---------|----|
| V  | 120-240 |    |
| mA                                                                                      | 100     | 60 |
| dB(A)1m                                                                                 | 87-105  |    |

TO BE INSTALLED BY QUALIFIED PERSONNEL ONLY

LA INSTALACIÓN SÓLO DEBE SER REALIZADA POR PERSONAL CUALIFICADO - L'INSTALLATION DOIT ÊTRE EFFECTUÉE PAR PERSONNEL QUALIFIÉ



NOT TO BE DISPOSED OF AS COMMON WASTE - NO ELIMINAR COMO DESECHO URBANO - NE PAS ELIMINER COMME DECHET URBAIN

