


Low-Profile Mini Strobe (LP1)

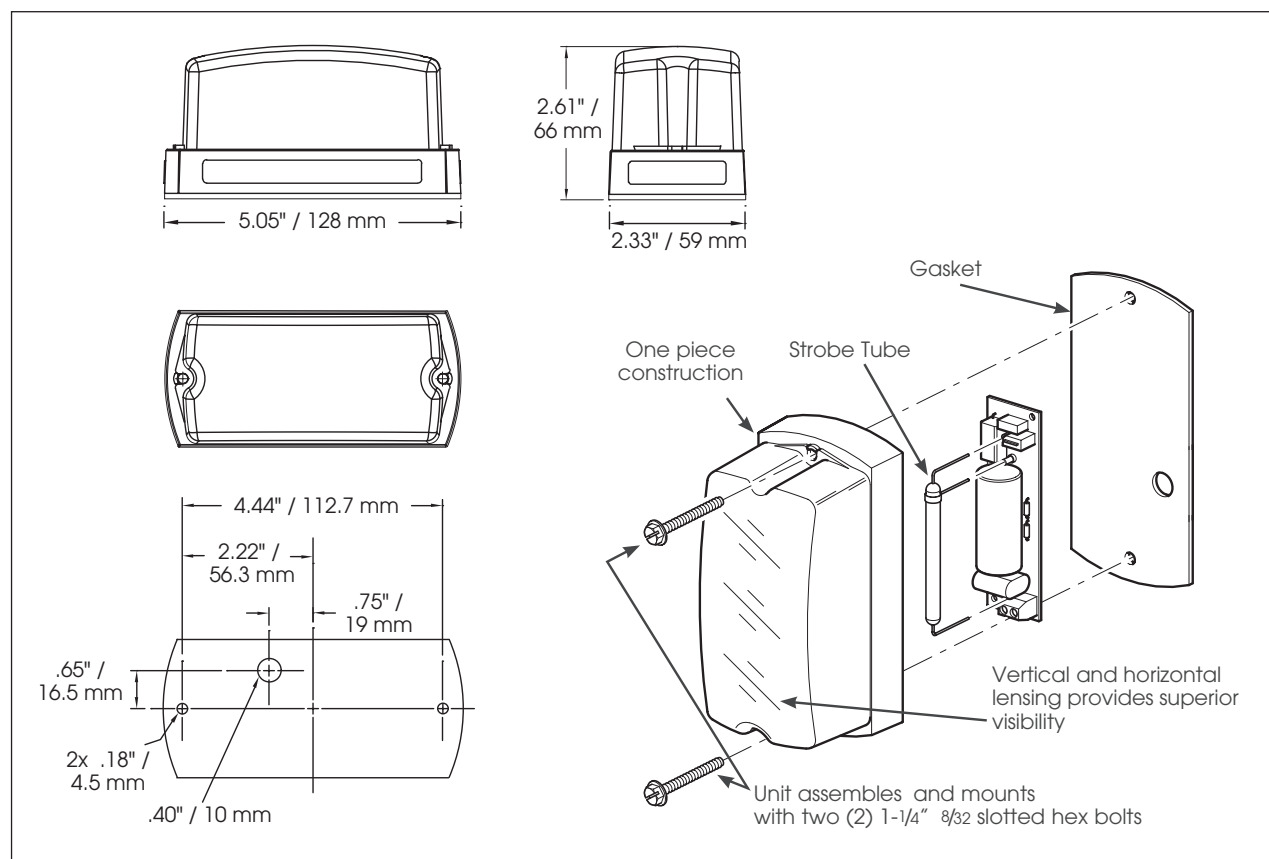

SPECIFICATIONS

Lamp Life:	4,000 Hours	
Light Source:	Strobe tube	
Operating Temperature:	-31°F to 151°F	-35°C to 66°C
Net Weight:	0.23 lbs	0.1 kg
Shipping Weight:	0.6 lbs	0.27 kg
Height:	2.61"	66.3 mm
Width:	2.33"	59.2 mm
Length:	5.05"	128.3 mm

HOW TO ORDER

LP1

TYPE
LP1

- 012 A

VOLTAGE

012 (12VDC)
024 (24VDC)
120 (120VAC)
240 (240VAC)


COLOR

A Amber
B Blue
C Clear
G Green
R Red

REPLACEMENT PARTS

Description	Part Number
Replacement Strobe Tube	K149128A
Housing and Lens Assembly, Amber	K8435711A-02
Housing and Lens Assembly, Blue	K8435711A-03
Housing and Lens Assembly, Clear	K8435711A
Housing and Lens Assembly, Green	K8435711A-04
Housing and Lens Assembly, Red	K8435711A-01

Visalert® Strobe Light (VALS)

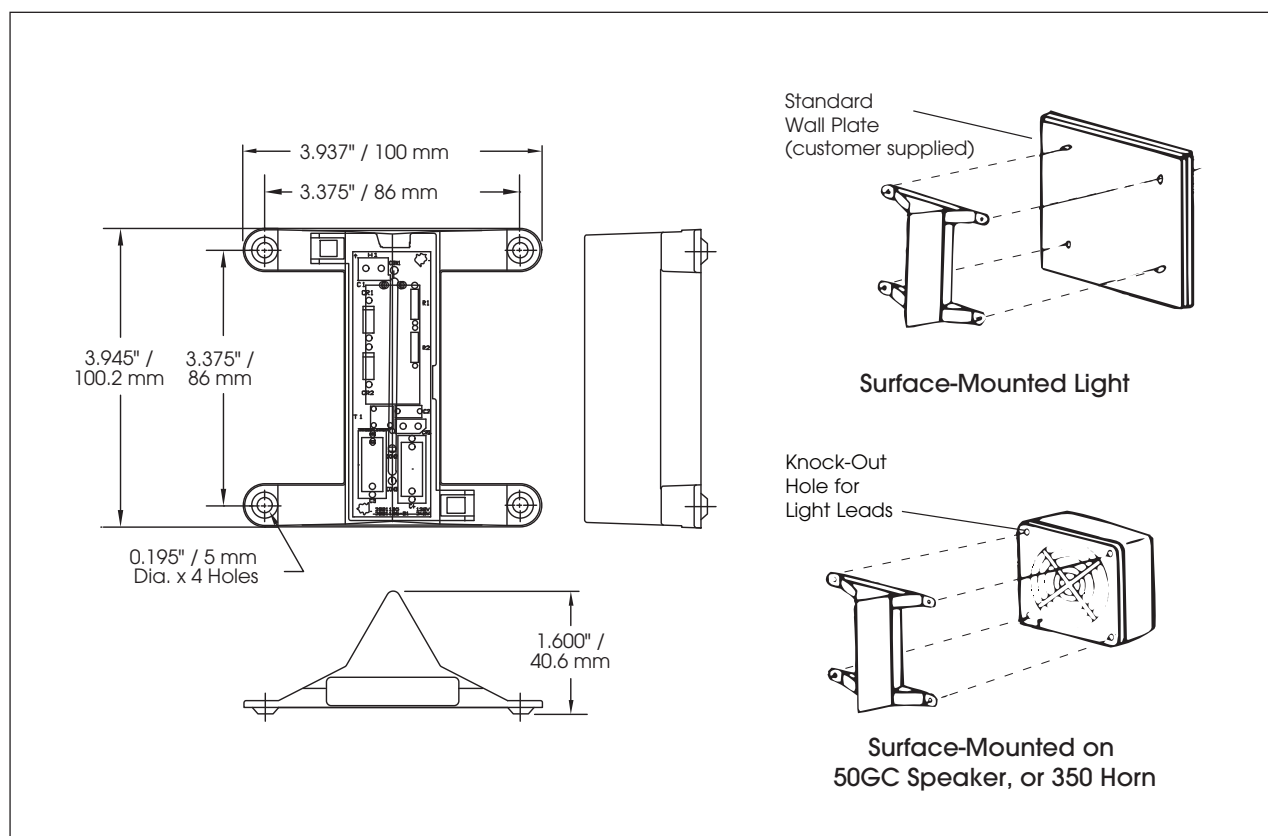

SPECIFICATIONS

Lamp Life:	4,000 Hours	
Light Source:	Strobe tube	
Operating Temperature:	-31°F to 150°F	-35°C to 66°C
Net Weight:	0.1 lbs	0.057 kg
Shipping Weight:	0.25 lbs	0.113 kg
Height:	3.95"	100.3 mm
Width:	3.94"	100.0 mm
Depth:	1.6"	40.6 mm

HOW TO ORDER

VALS	-	120	A
TYPE VALS		VOLTAGE	COLOR
		024 (24VDC)	A Amber
		120 (120VAC)	B Blue
		240 (240VAC)	C Clear
			G Green
			R Red

REPLACEMENT PARTS


Description	Part Number
Lens Kit, Amber ¹	K8435D539A
Lens Kit, Blue ¹	K8435D539A-08
Lens Kit, Clear ¹	K8435D539A-02
Lens Kit, Green ¹	K8435D539A-03
Lens Kit, Red ¹	K8435D539A-07
Strobe Tube	K149128A

¹ Kit Includes the lens and a gasket

RELATED PRODUCTS

Description	Part Number
Speaker	50GC
Horns	350

StreamLine® Low Profile Mini Strobe (LP6)

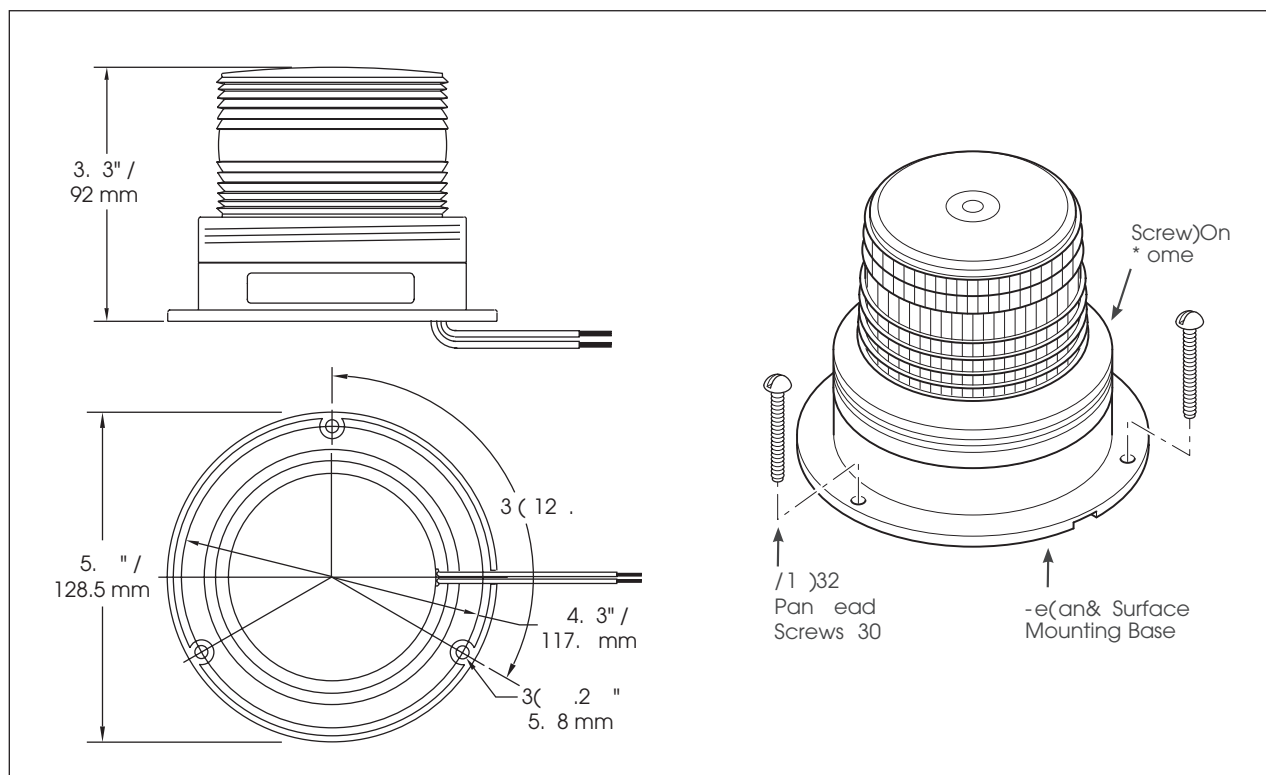

SPECIFICATIONS


Lamp Life:	7,000 Hours	
Light Source:	Strobe tube	
Operating Temperature:	-31°F to 150°F	-35°C to 65°C
Net Weight:	0.65 lbs	0.29 kg
Shipping Weight:	0.85 lbs	0.39 kg
Height:	3.63"	92 mm
Diameter:	5.06"	128.5 mm

REPLACEMENT PARTS


Description	Part Number
Lens Kit, Amber ¹	K8435D539A
Lens Kit, Blue ¹	K8435D539A-08
Lens Kit, Clear ¹	K8435D539A-02
Lens Kit, Green ¹	K8435D539A-03
Lens Kit, Red ¹	K8435D539A-07
Strobe Tube	K149128A

¹ Kit Includes the lens and a gasket

HOW TO ORDER

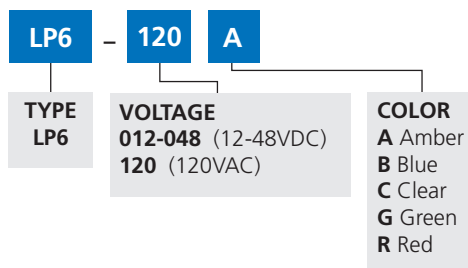

Electraflash® Strobe Light (141ST)

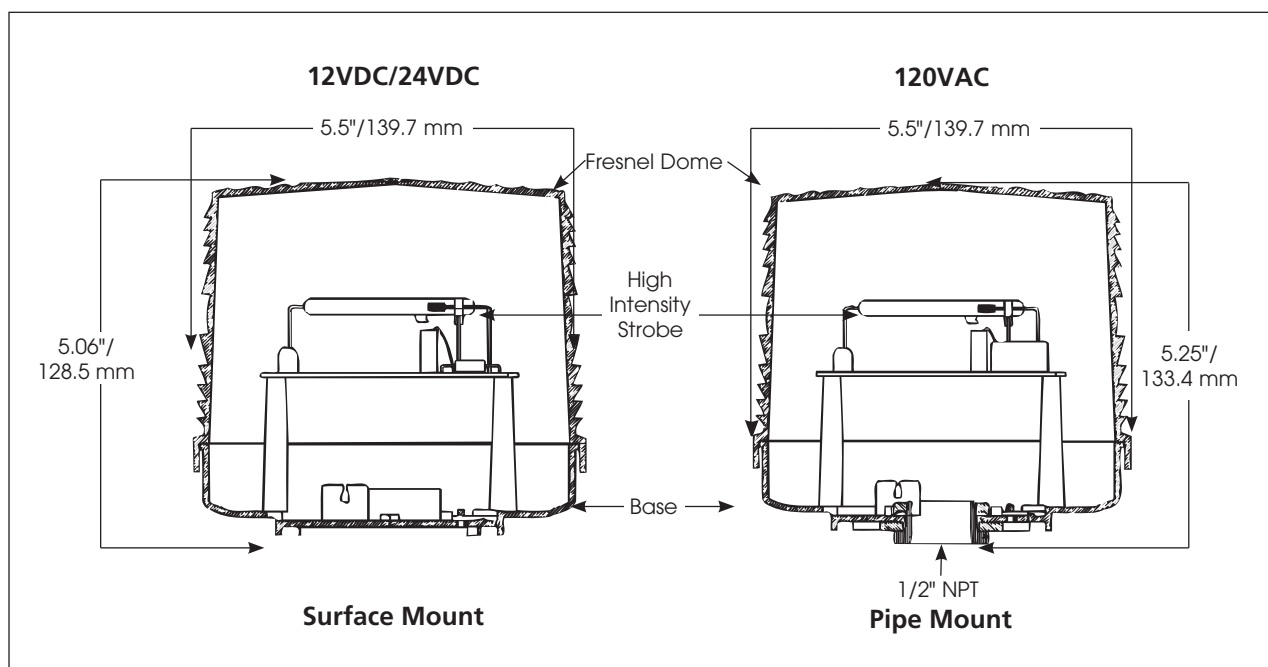

SPECIFICATIONS

Lamp Life:		4,000 Hours
Light Source:		Strobe tube
Operating Temperature:	-31°F to 150°F	-35°C to 66°C
Net Weight:		
DC Models	0.8 lbs	0.4 kg
AC Models	0.9 lbs	0.4 kg
Shipping Weight:		
DC Models	1.3 lbs	0.5 kg
AC Models	1.4 lbs	0.5 kg
Height:		
DC Models	5.06"	128.5 mm
AC Models	5.25"	133.4 mm
Diameter:		
DC Models	5.5"	139.7 mm
AC Models	5.5"	139.7 mm

REPLACEMENT PARTS

Description	Part Number
Dome, Amber	K8263079A
Dome, Blue	K8263079A-01
Dome, Green	K8263079A-03
Dome, Red	K8263079A-02
Strobe Tube	K149128A

OPTIONAL ACCESSORIES

(120VAC pipe mount model only)

Description	Part Number
Corner Bracket	LCMB2*
Wall Bracket	LWMB2*
Hazardous Location Mounting Bracket	LHWB

* Rated for NEMA 3R installations.

Mounting Brackets shown on pages 128-131

HOW TO ORDER

141ST	120	A
TYPE 141ST	VOLTAGE 012 (12VDC) 024 (24VDC) 120 (120VAC)	COLOR A Amber B Blue G Green R Red