
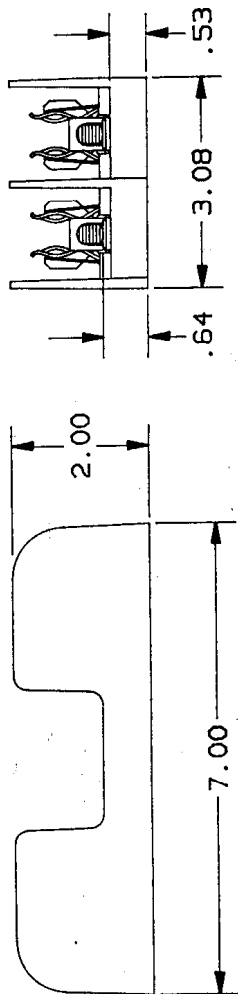


REV	DESCRIPTION	DATE	APPD
00	RELEASED		
01	REVISED PER ECO 91-037	10/91	B M

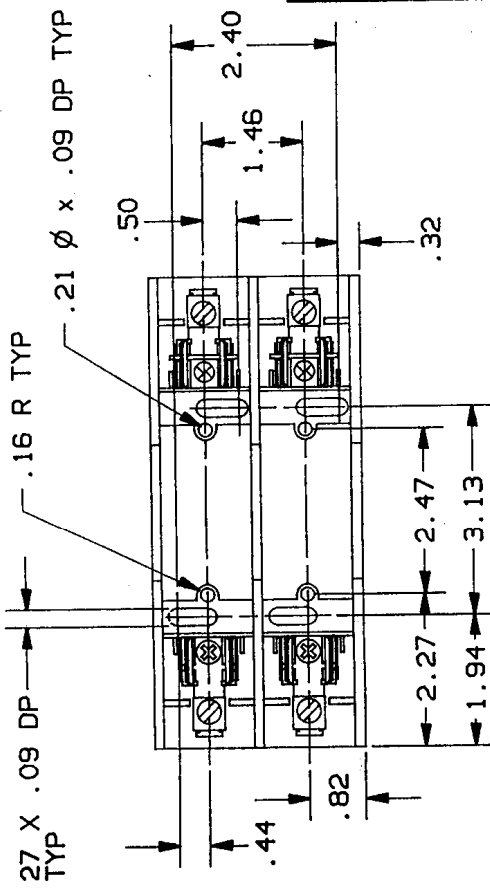

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		UL		CSA
				*C	TYPE	FILE NO.	GUIDE NO.	
60302 [2]	H, K	10K	35	60/75	CU-AL			
60307 [3]	H, K	10K	35	60/75	CU-AL CU ONLY	E52283	IZLT	LR32169
60307R 60357R	R	200K	35	60/75	CU-AL CU ONLY			

REFERENCE
MAR 16 1992

P/N 60302
P/N 60307(R) SPRF
P/N 60357(R) SPRF
ADD 'R' FOR CLASS R

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DRG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XXX±.01; X±.04; X/X±1/32; ANGLES ±0°30'		MATERIAL FINISH		GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654	
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL, MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.		PRODUCT INFO TITLE FUSE BLOCK, 600V-30A 2 POLE BOX CONNECTOR		REV 01	
ASSY DRG USED ON REF DR 614 DRG		SIGNATURES ORAN WILLIAMS CHKO G OAKLEY ENGO		DATE 2/90 10/91	
		SCALE NONE		FILE NO 05B0260	
		APPD B MANGONE		SHEET 1 of 1	

- [3] OMIT REJECTION.
- [2] OMIT SPRING AND REJECTION.
1. MATL COMPOSITION AND RATING: THERMOPLASTIC-125°C RTI.
- NOTES: UNLESS OTHERWISE SPECIFIED